
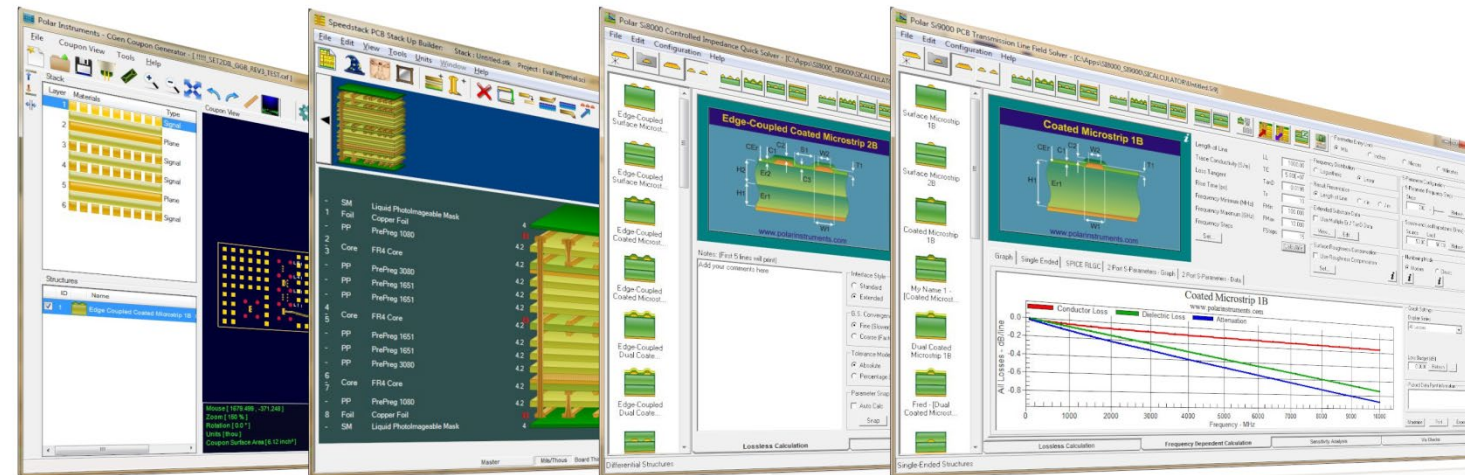
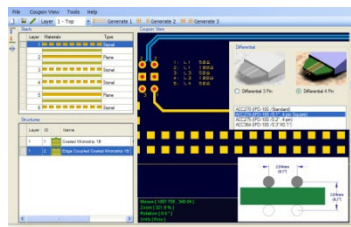
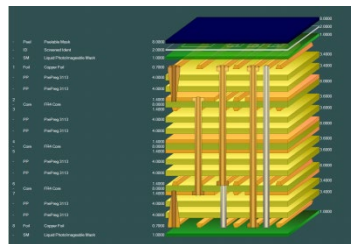
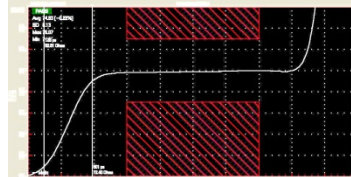
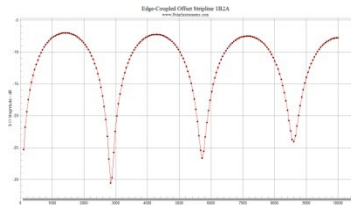


# Speedstack 2021 - 2023 Updates

Richard Attrill – April 2023 (Rev 11)

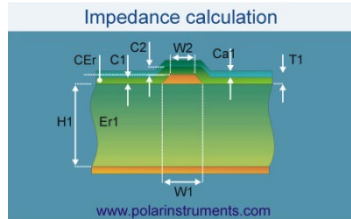

# Speedstack v23.04.02 (April 2023)

## Manufacturing Constraints / Design Rule Check Enhancements

The screenshot shows the Polar Speedstack Stack Up Builder interface. The main window displays a stack up design with layers and their thicknesses. A red vertical bar highlights a specific layer, and a red box highlights the DRC configuration window on the right. The DRC configuration window shows various checks selected, including Design Logic, Board Thickness, and Manufacturing Tests. A message box indicates that the Maximum Drill Aspect Ratio has been exceeded.


Layer	Material	Thickness (Mils/Thous)	Thickness (Mils)
- SM	Liquid Photolmageable Mask	4.000/0.0195	1.0000
1	Foil	Copper Foil	1.4000
- PP	PrePreg 1080	4.200/0.0195	1.9500
2	Core	FR4 Core	1.4000
- 3	Core	FR4 Core	3.0000
- PP	PrePreg 3080	4.200/0.0195	2.7760
- PP	PrePreg 1651	4.200/0.0195	5.5520
- PP	PrePreg 1651	4.200/0.0195	5.5520
4	Core	FR4 Core	1.4000
- 5	Core	FR4 Core	12.0000
- PP	PrePreg 1651	4.200/0.0195	5.5520
- PP	PrePreg 1651	4.200/0.0195	5.5520
- PP	PrePreg 3080	4.200/0.0195	2.7760
6	Core	FR4 Core	1.4000
- 7	Core	FR4 Core	3.0000
- PP	PrePreg 1080	4.200/0.0195	1.9500
8	Foil	Copper Foil	1.4000
- SM	Liquid Photolmageable Mask	4.000/0.0195	1.0000

The Speedstack Design Rule Checks (DRC) highlight potential problems with the stack up design.

The rules used by the DRC are held within the Manufacturing Constraints, where different constraints can be configured based upon the PCB fabricators capabilities.

V23.04 offers some significant Manufacturing Constraints / Design Rule Check enhancements over previous versions of Speedstack.



## Manufacturing Constraints / Design Rule Check Enhancements

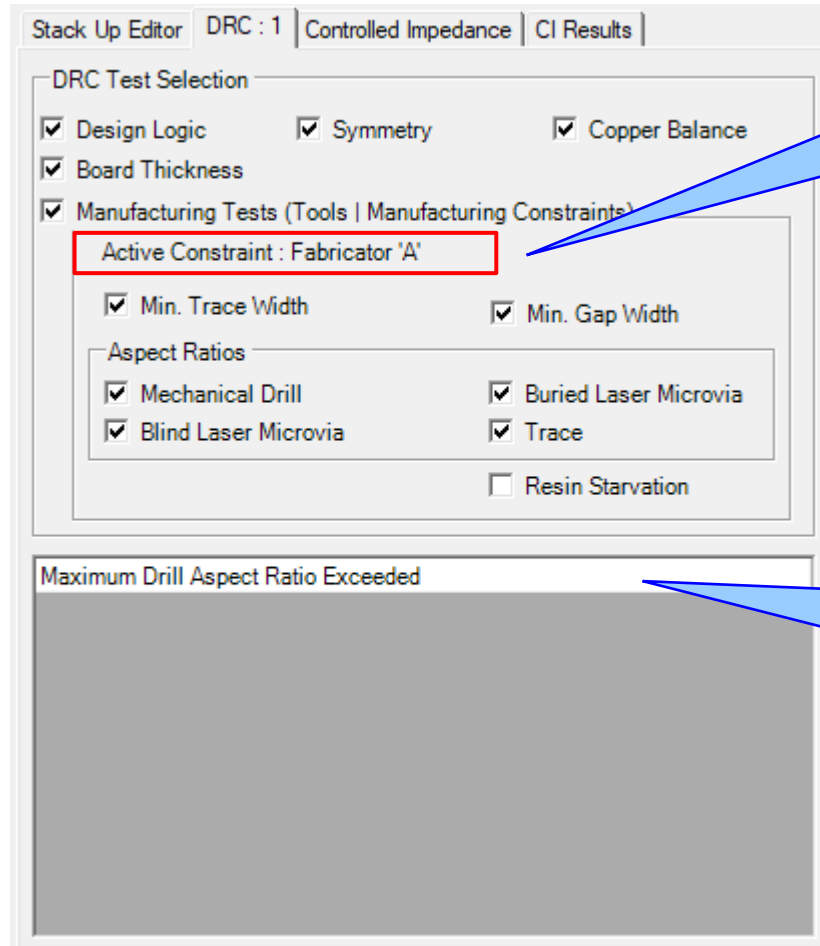

The Active Constraint name is now displayed here so the current selected set of Manufacturing Constraints is easily identifiable

DRC errors are listed here. Clicking the error will graphically highlight the problem on the stack up

## Manufacturing Constraints / Design Rule Check Enhancements

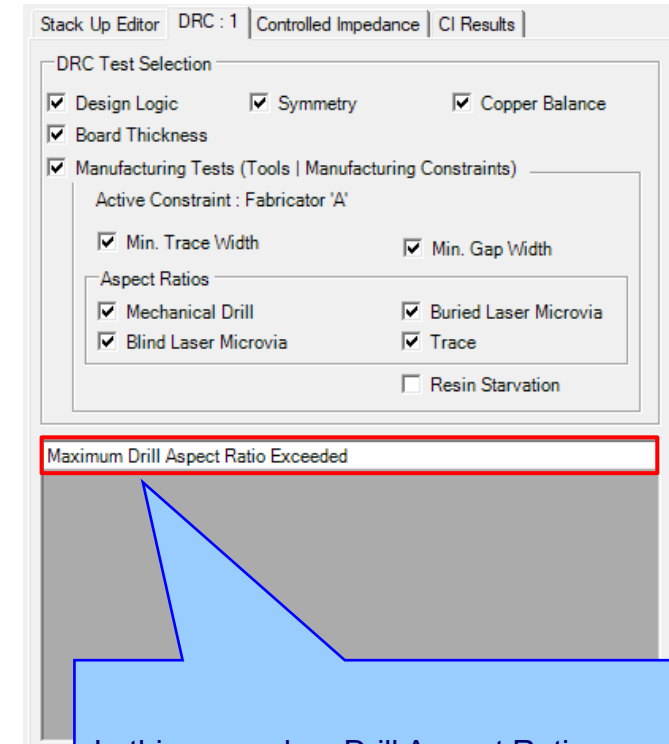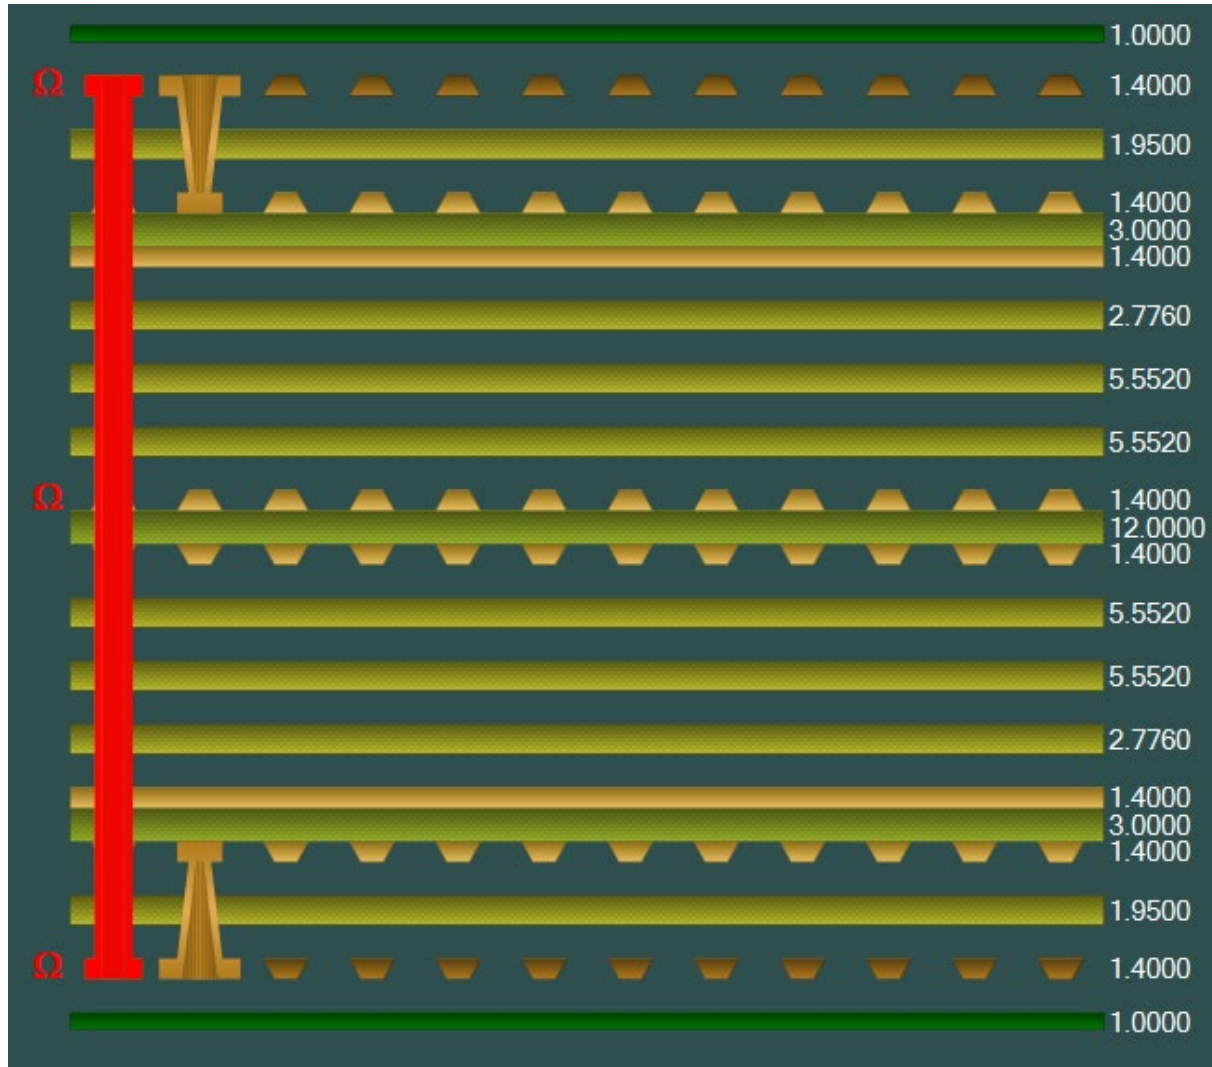

In this example a Drill Aspect Ratio error has been identified, clicking on the error will highlight the offending drill in red.

Drill Aspect Ratio checks the length of the drill against the diameter to determine whether plating problems might occur

## Manufacturing Constraints / Design Rule Check Enhancements

Manufacturing Constraints

Active Constraint : Fabricator 'A'

	Manufacturer's Name	Blind Laser Via A. R.	Buried Laser Via A.	Mechanical Drill A. R.	Minimum Gap	Minimum Trace Width	Trace A. R.	Units
	Polar Microns	0.5	0.5	8.5	75	75	1	Microns
	Polar Mils	0.5	0.5	8.5	3	3	1	Mils
	Polar Millimetres	0.5	0.5	8.5	0.075	0.075	1	Millimetres
	Polar Inches	0.5	0.5	8.5	0.003	0.003	1	Inches
▶	Fabricator 'A'	0.5	0.5	6	3	3	1	Mils

Instructions: Double-Click the Data Grid row to edit, add or delete a constraint

Highlight and Set Active Constraint

Highlight Set

Switching the active constraint is achieved by selecting the required Data Grid row and clicking Set

The Tools | Manufacturing Constraints option provides options to Add, Delete and Edit the constraints. Multiple sets of constraints are supported, allowing the stack up design to be checked against different fabricators capabilities.

The current active constraint used by the DRC tab, Fabricator 'A', is displayed above the Data Grid



## Manufacturing Constraints / Design Rule Check Enhancements

**Manufacturing Constraints**

Active Constraint : Fabricator 'A'

	Manufacturer's Name	Blind Laser Via A. R.	Buried
	Polar Microns	0.5	
	Polar Mils	0.5	
	Polar Millimetres	0.5	
	Polar Inches	0.5	
▶	Fabricator 'A'	0.5	

add or delete a constraint

Highlight    Set

**Edit Constraints**

Units

Mils                       Microns

Inches                         Millimetres

Option Name: Fabricator 'A'

Minimum Gap: 3

Minimum Trace Width: 3

Mechanical Drill A.R.: 6

Blind Via A.R.: 0.5

Buried Via A.R.: 0.5

Trace A.R.: 1

<< < 5 of 5 > >>

Add    Delete    Done    Cancel

Instructions

Add: Press Add, which will add a new blank constraint. Notice the 'n of n' record number will increase. Now key in the constraint details and select Done.

Delete: Press Delete to remove the existing constraint. Notice the 'n of n' record number will reduce. Then select Done to close the dialog.

Edit: Edit the existing constraint and select Done to close the dialog.

Width	Trace A. R.	Units
	1	Microns
	1	Mils
	1	Millimetres
	1	Inches
	1	Mils


Close

Double-clicking the Data Grid row presents the Edit Constraints dialog, allowing parameters to be specified based upon the PCB fabricators' capabilities

# Speedstack v23.03.01 (March 2023)



## Material Library Filter / Search Enhancements

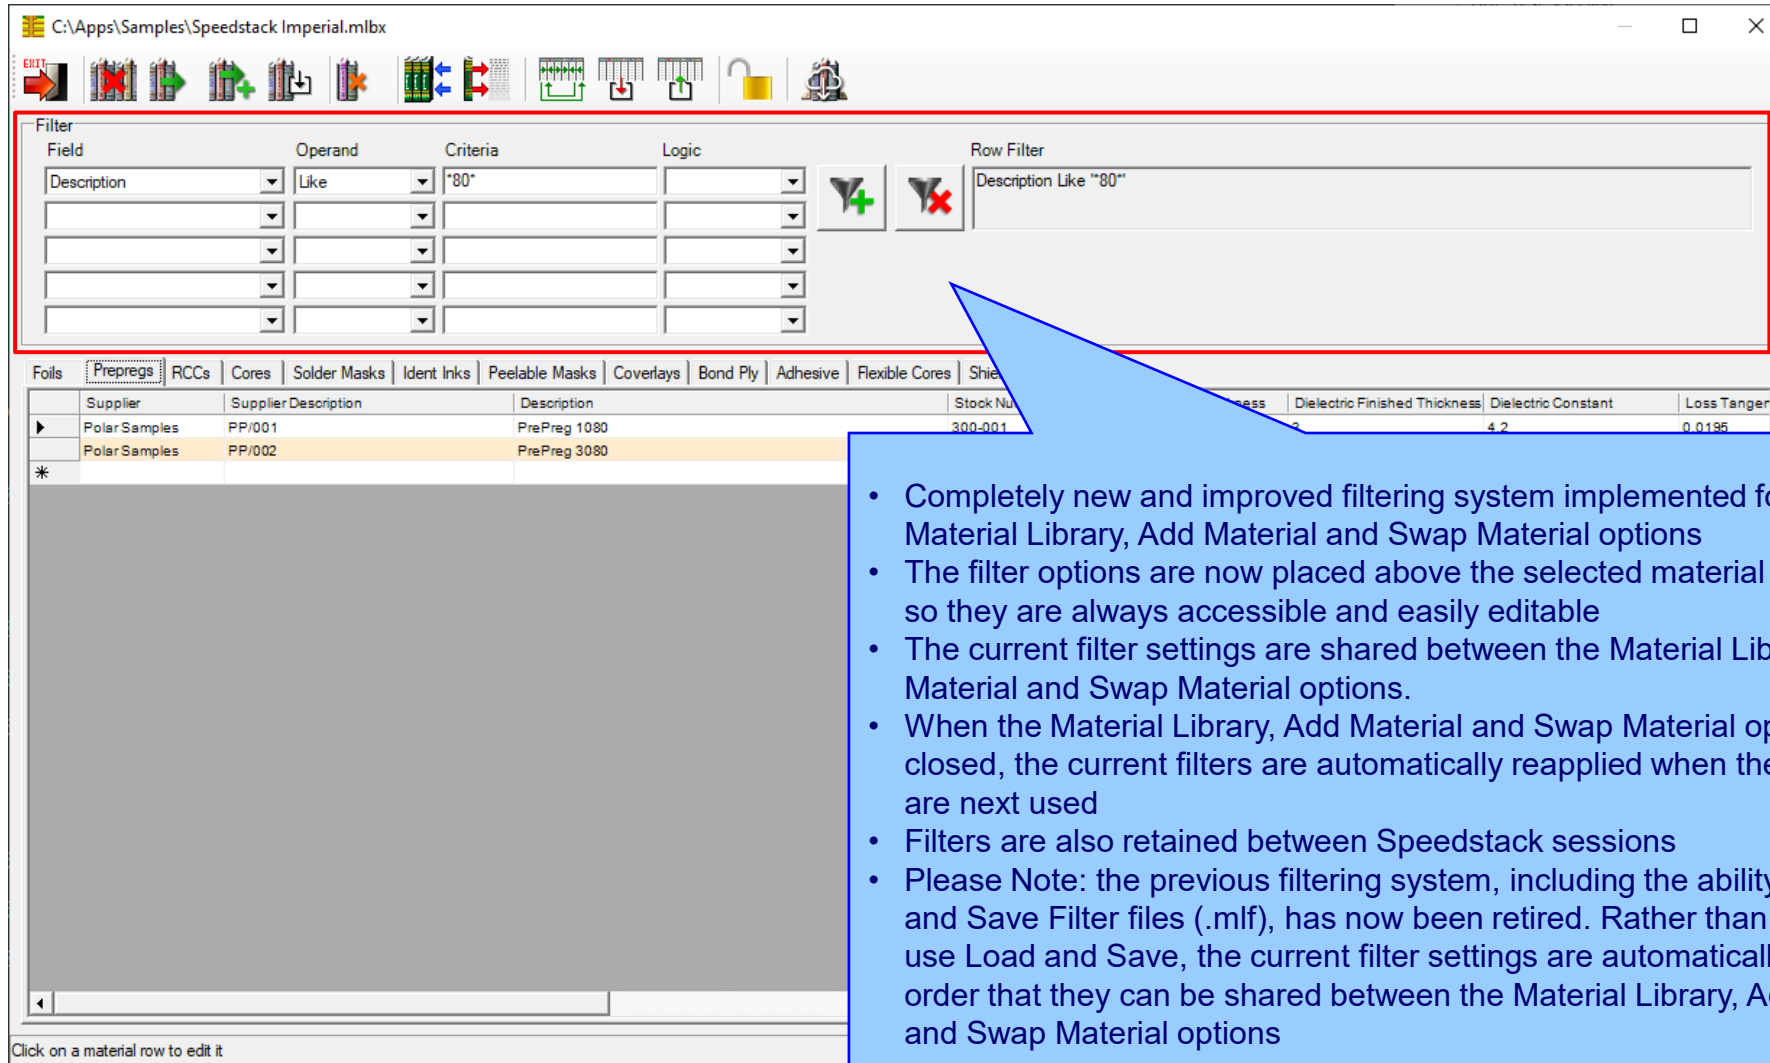


Field	Operand	Criteria	Logic	Row Filter
Description	Like	*80*		Description Like *80*

Supplier	Supplier Description	Description	Stock Number	Dielectric Finished Thickness	Dielectric Constant	Loss Tangent
Polar Samples	PP/001	PrePreg 1080	300-001		4.2	0.0195
Polar Samples	PP/002	PrePreg 3080				

- Completely new and improved filtering system implemented for the Material Library, Add Material and Swap Material options
- The filter options are now placed above the selected material Data Grid, so they are always accessible and easily editable
- The current filter settings are shared between the Material Library, Add Material and Swap Material options.
- When the Material Library, Add Material and Swap Material options are closed, the current filters are automatically reapplied when these options are next used
- Filters are also retained between Speedstack sessions
- Please Note: the previous filtering system, including the ability to Load and Save Filter files (.mlf), has now been retired. Rather than needing to use Load and Save, the current filter settings are automatically saved in order that they can be shared between the Material Library, Add Material and Swap Material options

## Material Library Filter / Search Enhancements

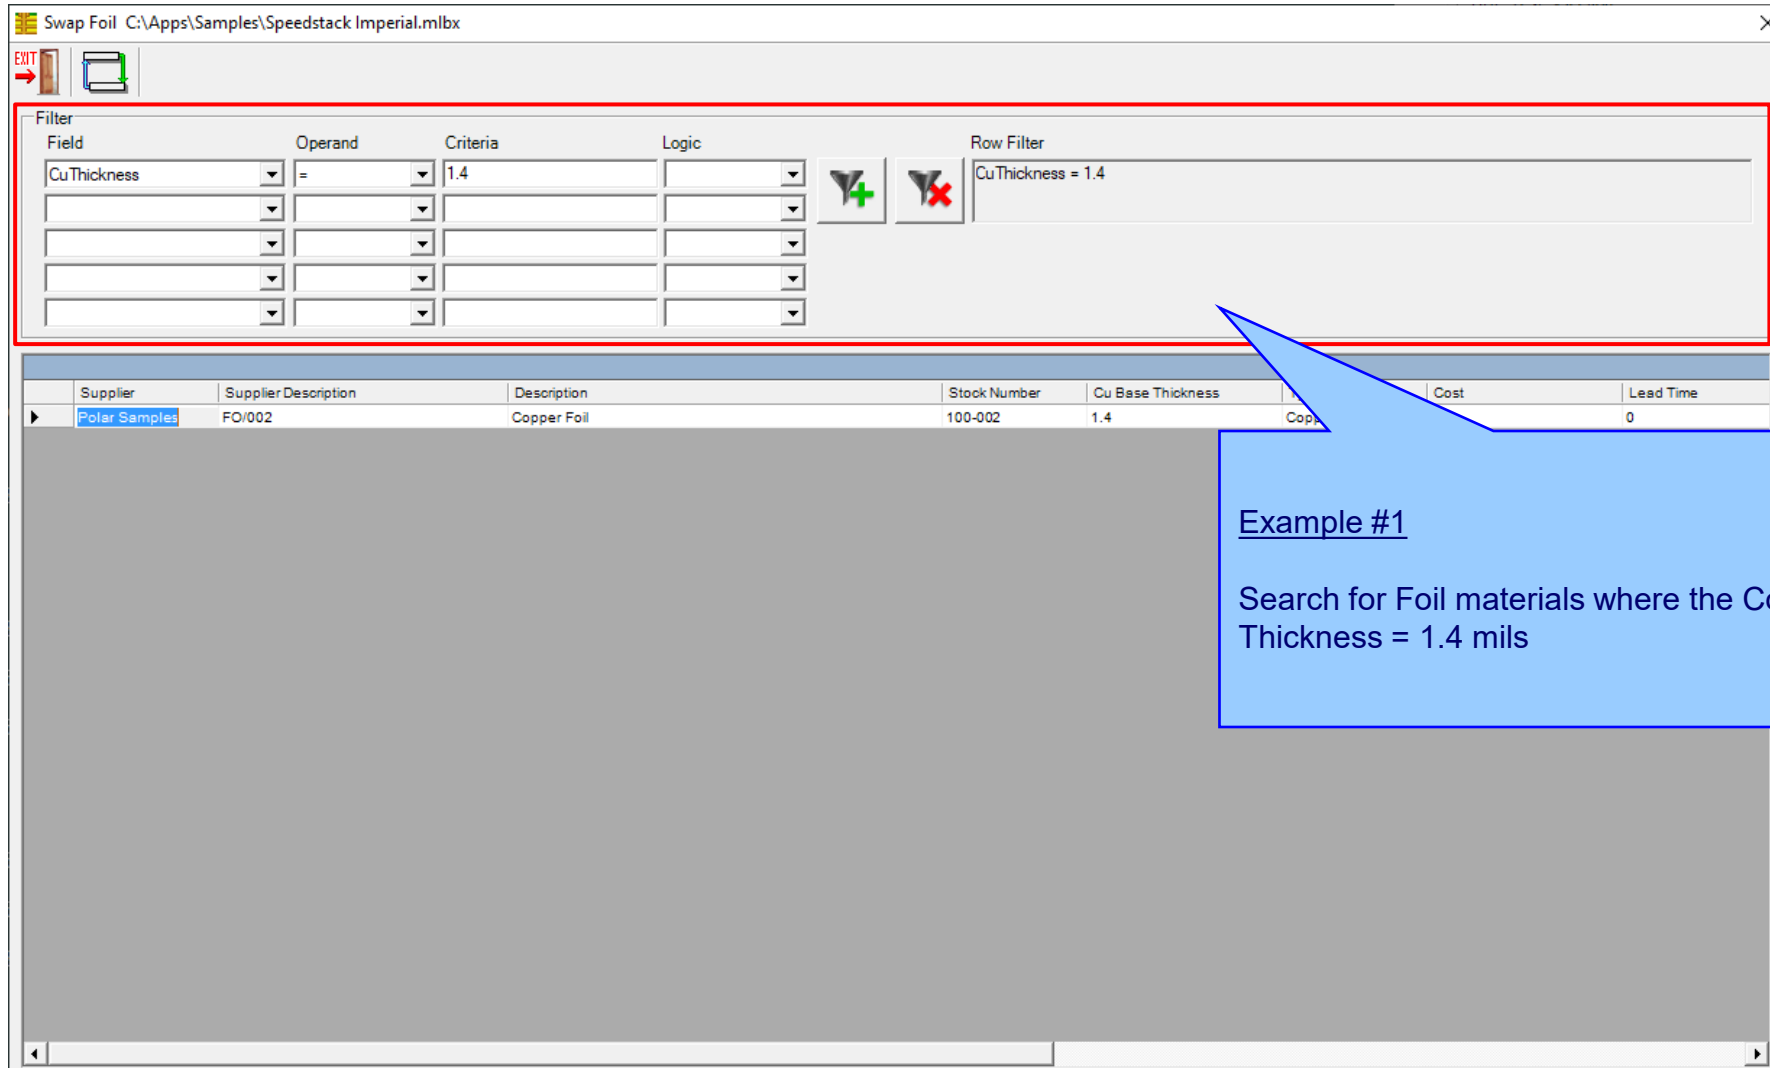


The screenshot shows a software window titled "Swap Foil C:\Apps\Samples\Speedstack Imperial.mlbx". The window contains a "Filter" section with a table for defining search criteria. The table has columns for "Field", "Operand", "Criteria", and "Logic". The first row is populated with "CuThickness", "=", and "1.4". To the right of the table are two icons: a green plus sign and a red minus sign. Further right is a "Row Filter" box containing the text "CuThickness = 1.4". Below the filter section is a table of material data with columns: Supplier, Supplier Description, Description, Stock Number, Cu Base Thickness, Cost, and Lead Time. The first row of data is: Polar Samples, FO/002, Copper Foil, 100-002, 1.4, Cost, 0.

Field	Operand	Criteria	Logic
CuThickness	=	1.4	

Supplier	Supplier Description	Description	Stock Number	Cu Base Thickness	Cost	Lead Time
Polar Samples	FO/002	Copper Foil	100-002	1.4	Cost	0

Example #1  
Search for Foil materials where the Copper Thickness = 1.4 mils

## Material Library Filter / Search Enhancements

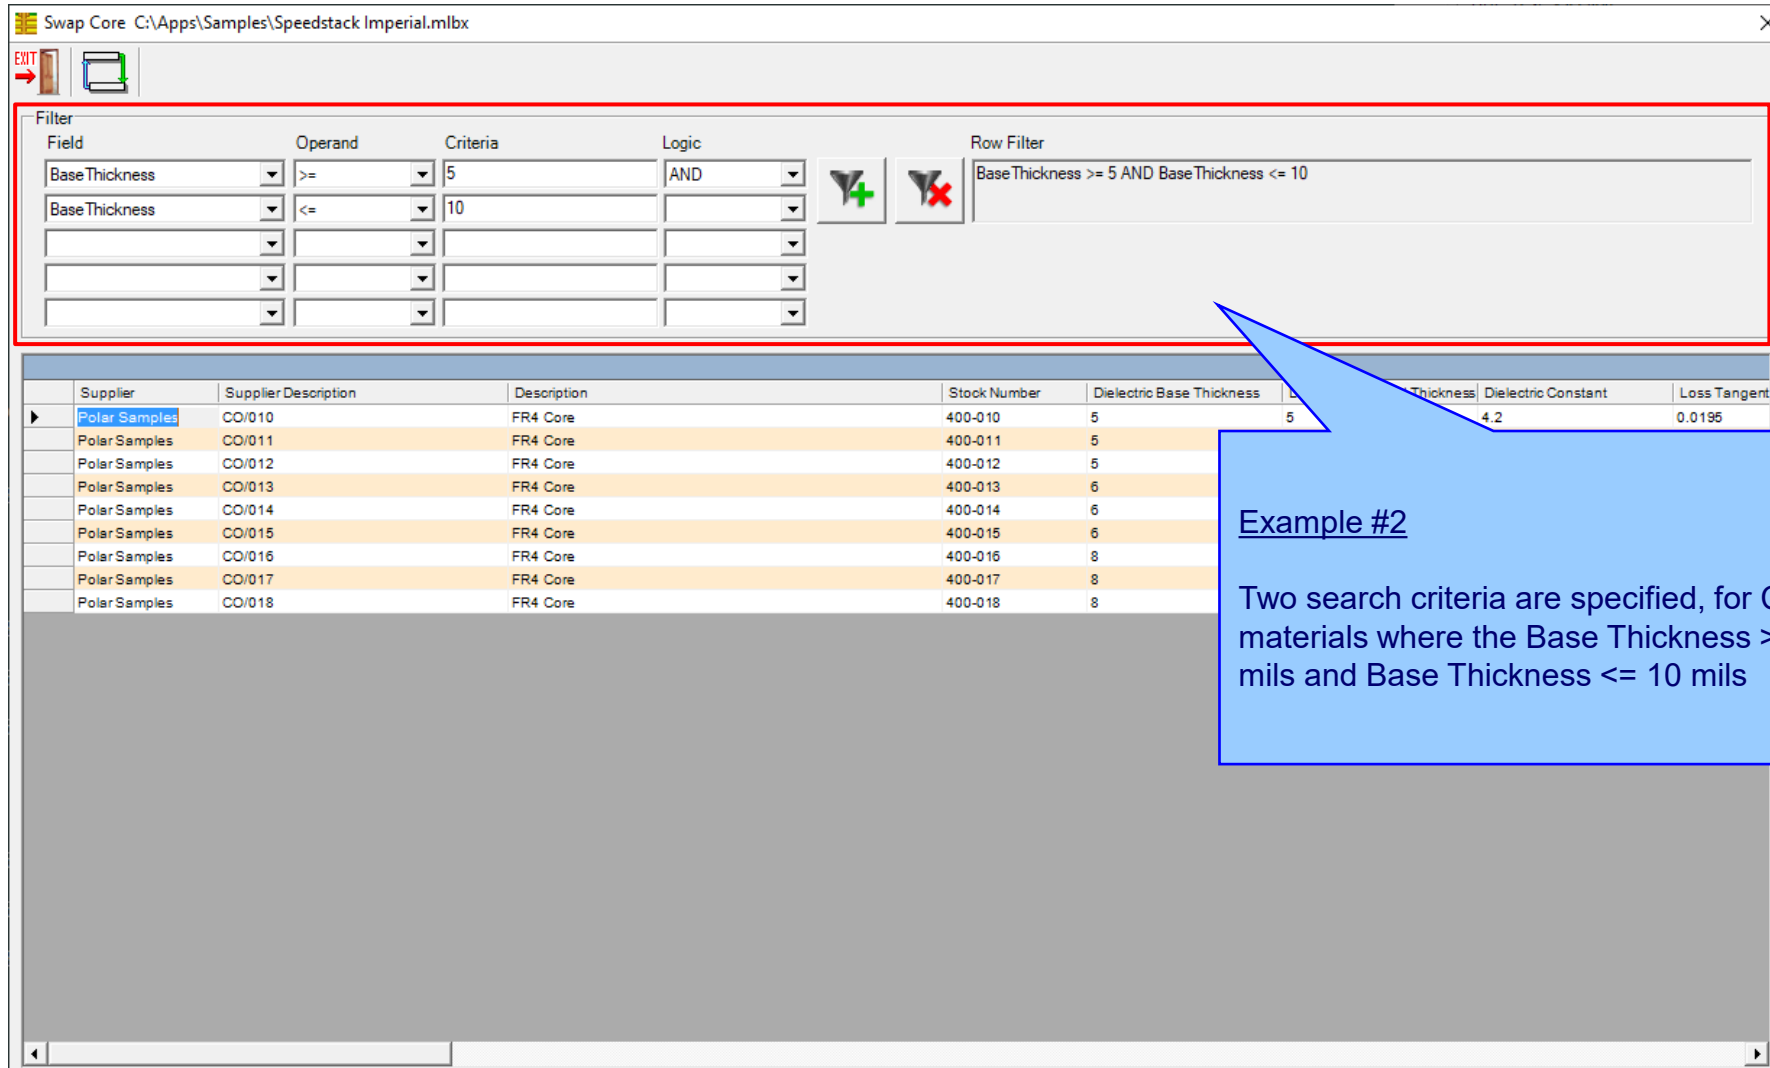

The screenshot shows a software window titled "Swap Core C:\Apps\Samples\Speedstack Imperial.mlbx". The window contains a "Filter" section with a table for defining search criteria. The criteria are:


Field	Operand	Criteria	Logic
Base Thickness	>=	5	AND
Base Thickness	<=	10	

The "Row Filter" section displays the resulting search expression: "Base Thickness >= 5 AND Base Thickness <= 10". Below the filter section is a table of material samples:

Supplier	Supplier Description	Description	Stock Number	Dielectric Base Thickness	Dielectric Constant	Loss Tangent
Polar Samples	CO/010	FR4 Core	400-010	5	4.2	0.0195
Polar Samples	CO/011	FR4 Core	400-011	5		
Polar Samples	CO/012	FR4 Core	400-012	5		
Polar Samples	CO/013	FR4 Core	400-013	6		
Polar Samples	CO/014	FR4 Core	400-014	6		
Polar Samples	CO/015	FR4 Core	400-015	6		
Polar Samples	CO/016	FR4 Core	400-016	8		
Polar Samples	CO/017	FR4 Core	400-017	8		
Polar Samples	CO/018	FR4 Core	400-018	8		

**Example #2**  
 Two search criteria are specified, for Core materials where the Base Thickness >= 5 mils and Base Thickness <= 10 mils

## Material Library Filter / Search Enhancements

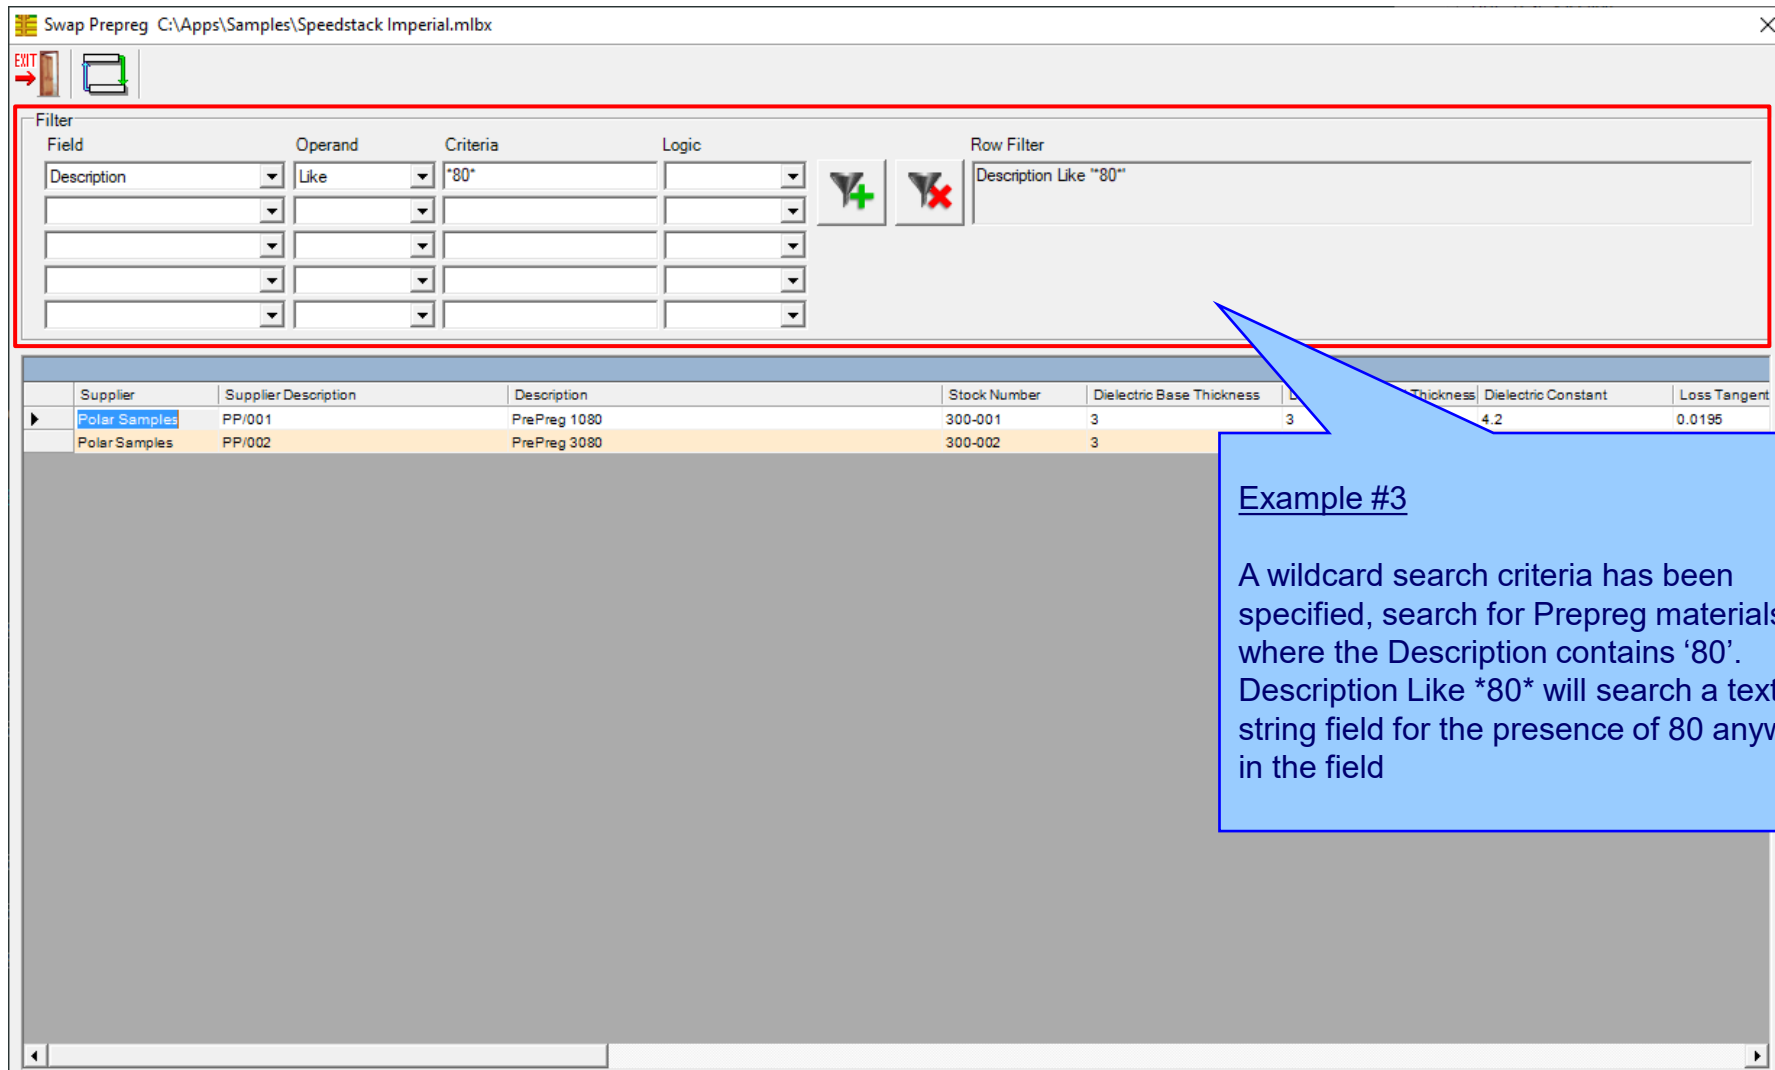

The screenshot shows a software window titled "Swap Prepreg C:\Apps\Samples\Speedstack Imperial.mlbx". Inside, there is a "Filter" section with a table for defining search criteria. The first row is highlighted with a red border and contains the following data:

Field	Operand	Criteria	Logic
Description	Like	*80*	


To the right of the table is a "Row Filter" section containing the text "Description Like \*80\*". Below the filter section is a table with the following data:

Supplier	Supplier Description	Description	Stock Number	Dielectric Base Thickness	Dielectric Thickness	Dielectric Constant	Loss Tangent
Polar Samples	PP/001	PrePreg 1080	300-001	3	3	4.2	0.0195
Polar Samples	PP/002	PrePreg 3080	300-002	3			

### Example #3

A wildcard search criteria has been specified, search for Prepreg materials where the Description contains '80'. Description Like \*80\* will search a text / string field for the presence of 80 anywhere in the field

## Online Library – Now supports three modes

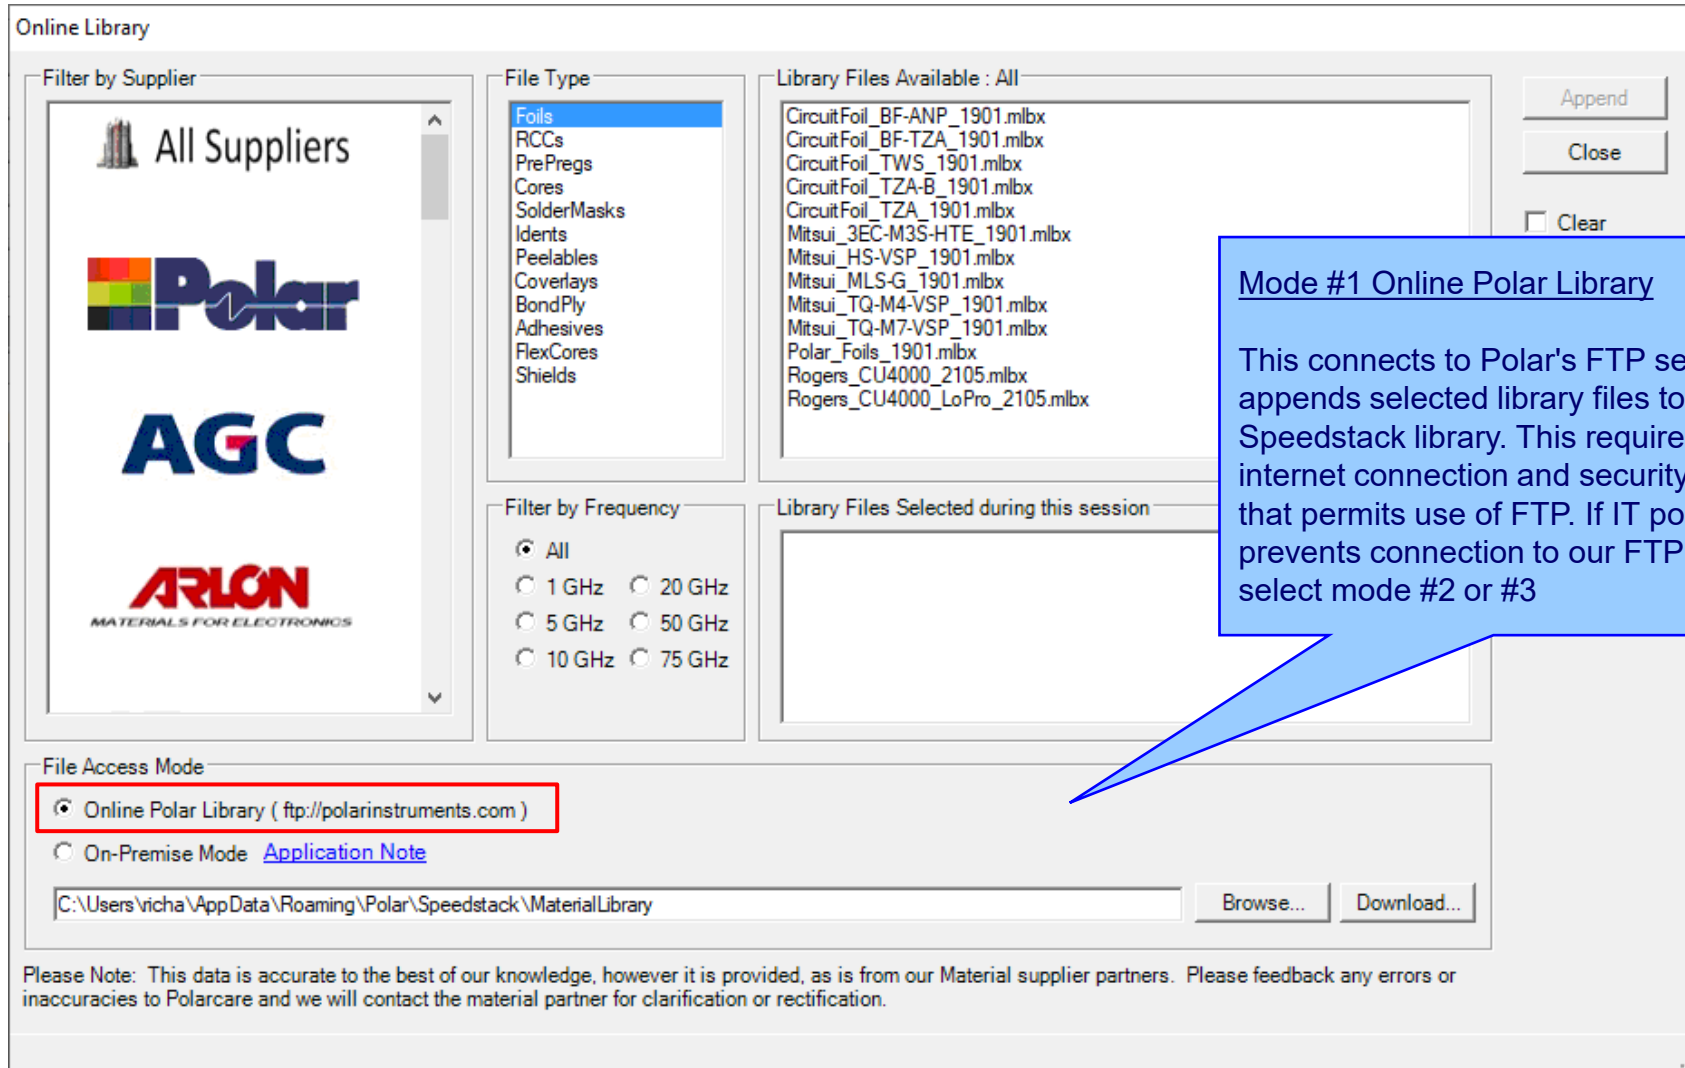

The screenshot displays the 'Online Library' window with the following sections:


- Filter by Supplier:** A list of suppliers including 'All Suppliers', 'Polar', 'AGC', and 'ARLON MATERIALS FOR ELECTRONICS'.
- File Type:** A list of file types such as 'Foils', 'RCCs', 'PrePregs', 'Cores', 'SolderMasks', 'Idents', 'Peelables', 'Coverlays', 'BondPly', 'Adhesives', 'FlexCores', and 'Shields'. 'Foils' is currently selected.
- Library Files Available : All:** A list of available files including 'CircuitFoil\_BF-ANP\_1901.mlbx', 'CircuitFoil\_BF-TZA\_1901.mlbx', 'CircuitFoil\_TWS\_1901.mlbx', 'CircuitFoil\_TZA-B\_1901.mlbx', 'CircuitFoil\_TZA\_1901.mlbx', 'Mitsui\_3EC-M3S-HTE\_1901.mlbx', 'Mitsui\_HS-VSP\_1901.mlbx', 'Mitsui\_MLS-G\_1901.mlbx', 'Mitsui\_TQ-M4-VSP\_1901.mlbx', 'Mitsui\_TQ-M7-VSP\_1901.mlbx', 'Polar\_Foils\_1901.mlbx', 'Rogers\_CU4000\_2105.mlbx', and 'Rogers\_CU4000\_LoPro\_2105.mlbx'.
- Filter by Frequency:** Radio buttons for 'All', '1 GHz', '20 GHz', '5 GHz', '50 GHz', '10 GHz', and '75 GHz'. 'All' is selected.
- Library Files Selected during this session:** An empty list box.
- File Access Mode:** Radio buttons for 'Online Polar Library ( ftp://polarinstruments.com )' and 'On-Premise Mode [Application Note](#)'. The 'Online Polar Library' mode is selected and highlighted with a red box.
- Path:** A text box containing 'C:\Users\vicha\AppData\Roaming\Polar\Speedstack\MaterialLibrary' with 'Browse...' and 'Download...' buttons.
- Buttons:** 'Append', 'Close', and 'Clear' buttons are visible in the top right.

Please Note: This data is accurate to the best of our knowledge, however it is provided, as is from our Material supplier partners. Please feedback any errors or inaccuracies to Polarcare and we will contact the material partner for clarification or rectification.

### Mode #1 Online Polar Library

This connects to Polar's FTP server and appends selected library files to the existing Speedstack library. This requires an internet connection and security settings that permits use of FTP. If IT policies prevents connection to our FTP server, select mode #2 or #3

## Online Library – Now supports three modes

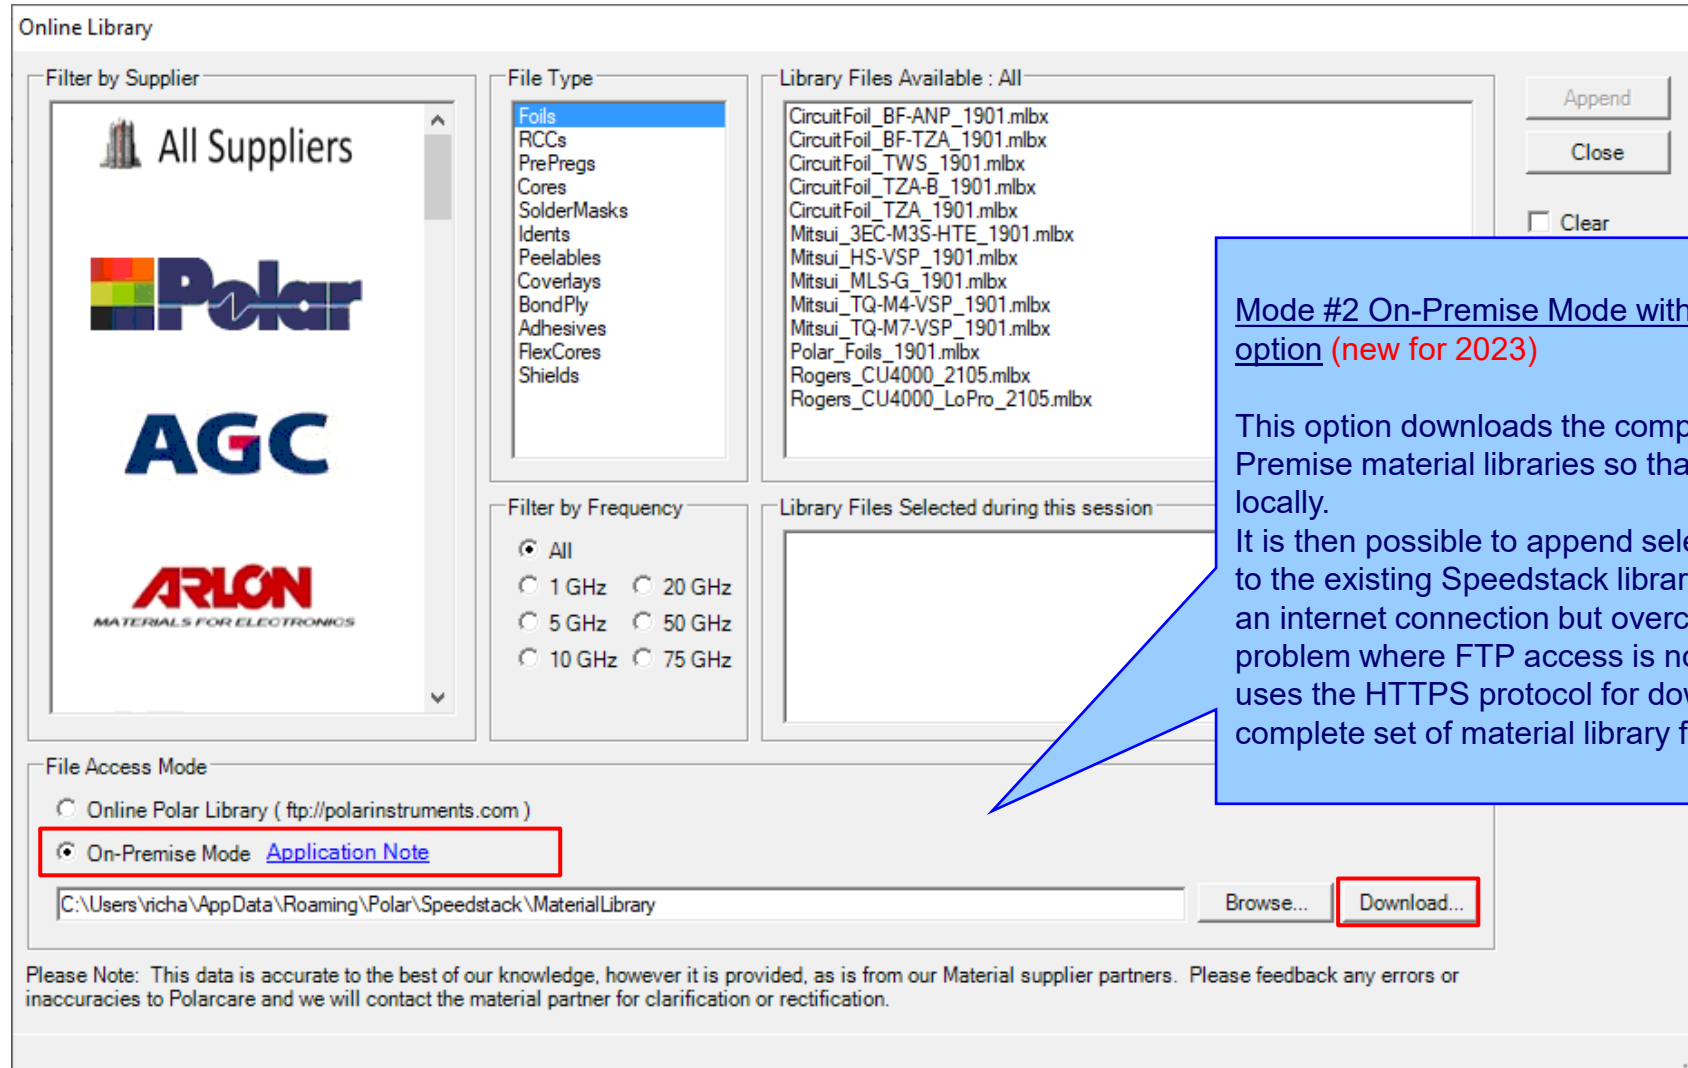


The screenshot shows the 'Online Library' application window. On the left, there is a 'Filter by Supplier' section with logos for 'All Suppliers', 'Polar', 'AGC', and 'ARLON MATERIALS FOR ELECTRONICS'. In the center, the 'File Type' list includes Foils, RCCs, PrePregs, Cores, SolderMasks, Idents, Peelables, Coverlays, BondPly, Adhesives, FlexCores, and Shields. Below this is a 'Filter by Frequency' section with radio buttons for All, 1 GHz, 20 GHz, 5 GHz, 50 GHz, 10 GHz, and 75 GHz. The 'Library Files Available : All' list contains various .mlbx files from suppliers like CircuitFoil, Mitsui, and Rogers. At the bottom, the 'File Access Mode' section has 'On-Premise Mode' selected and highlighted with a red box, with a link to 'Application Note'. Below this is a text box containing the path 'C:\Users\vicha\AppData\Roaming\Polar\Speedstack\MaterialLibrary' and a 'Download...' button, also highlighted with a red box. A blue callout box points to the 'On-Premise Mode' selection.

**Mode #2 On-Premise Mode with Download option (new for 2023)**

This option downloads the complete set of On-Premise material libraries so that they are stored locally.

It is then possible to append selected library files to the existing Speedstack library. This requires an internet connection but overcomes the problem where FTP access is not permitted as it uses the HTTPS protocol for downloading the complete set of material library files.

## Online Library – Now supports three modes

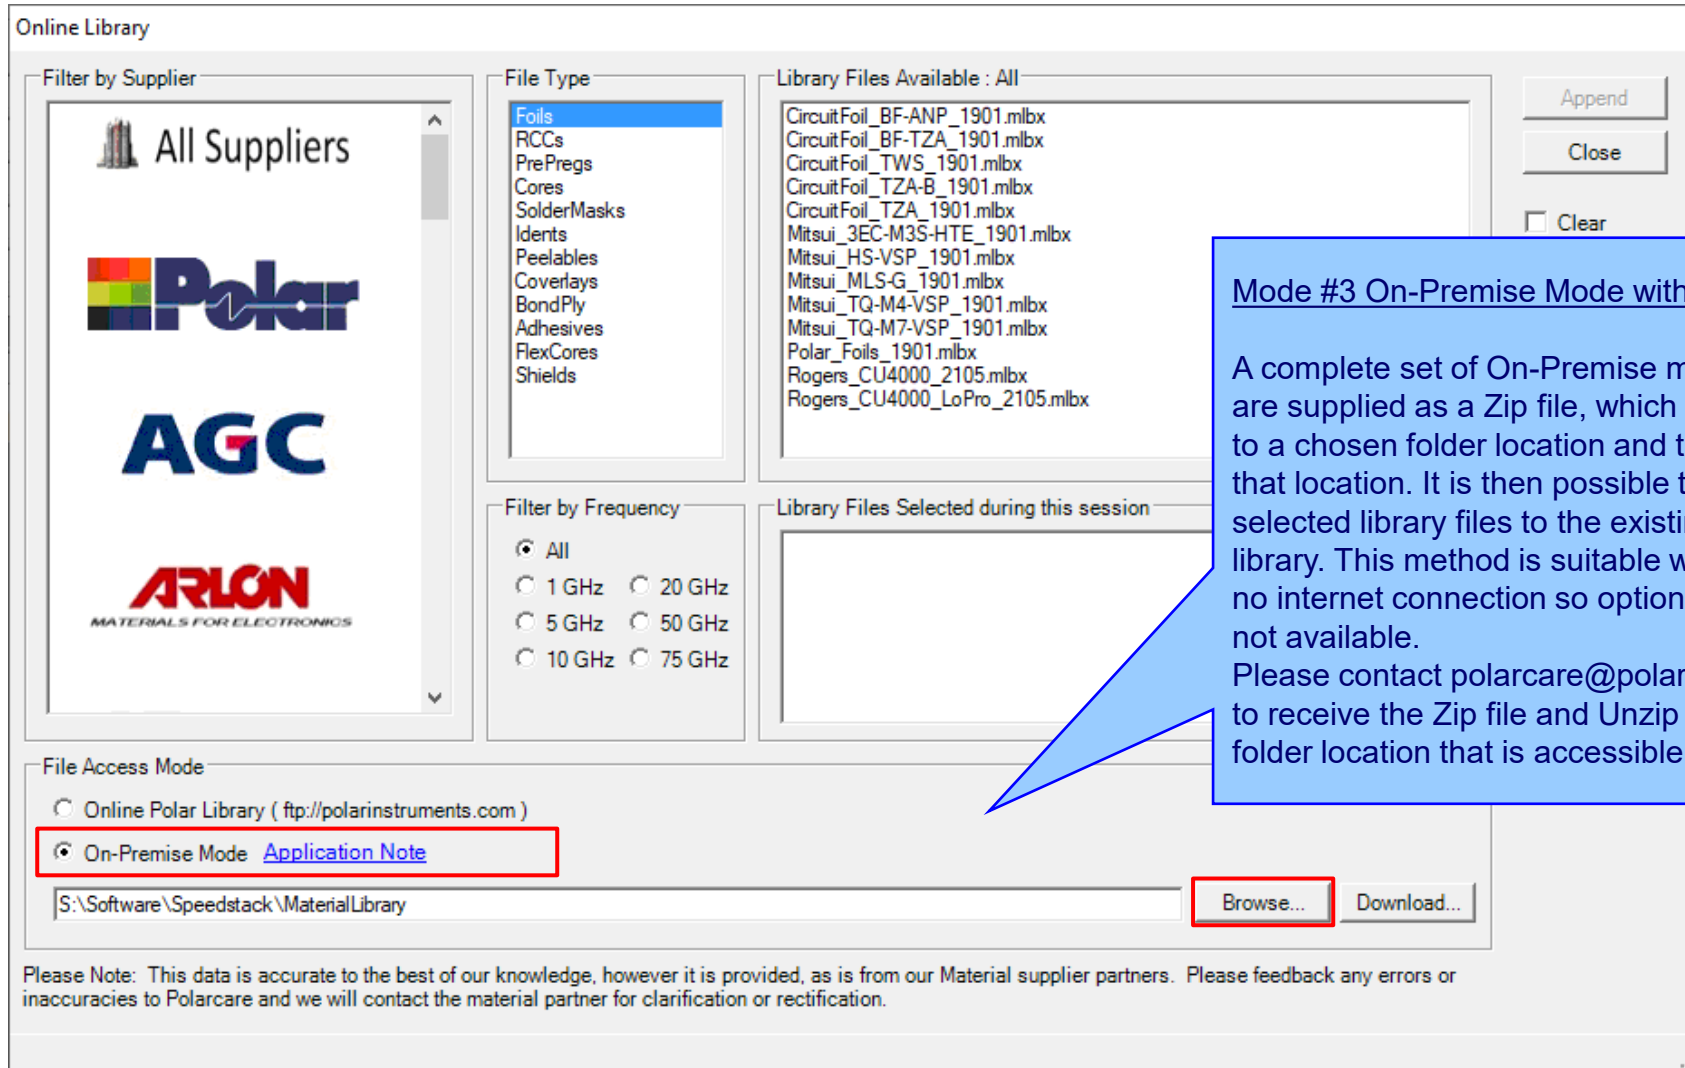

The screenshot shows the 'Online Library' application window. On the left, there is a 'Filter by Supplier' section with logos for 'All Suppliers', 'Polar', 'AGC', and 'ARLON MATERIALS FOR ELECTRONICS'. Below this is a 'Filter by Frequency' section with radio buttons for 'All', '1 GHz', '5 GHz', '10 GHz', '20 GHz', '50 GHz', and '75 GHz'. The 'File Type' section lists various file types, with 'Foils' selected. The 'Library Files Available : All' section lists several .mlbx files. The 'File Access Mode' section at the bottom has two options: 'Online Polar Library ( ftp://polarinstruments.com )' and 'On-Premise Mode [Application Note](#)', with the latter selected and highlighted by a red box. Below the mode selection is a text box containing the path 'S:\Software\Speedstack\MaterialLibrary' and a 'Browse...' button, also highlighted by a red box. A 'Download...' button is to its right. A blue callout box points to the 'On-Premise Mode' option.

### Mode #3 On-Premise Mode with Browse option

A complete set of On-Premise material libraries are supplied as a Zip file, which can be Unzipped to a chosen folder location and then Browse to that location. It is then possible to append selected library files to the existing Speedstack library. This method is suitable where users have no internet connection so options #1 and #2 are not available.

Please contact [polarcare@polarinstruments.com](mailto:polarcare@polarinstruments.com) to receive the Zip file and Unzip to a suitable folder location that is accessible by Speedstack



# Speedstack v22.11.01 (November 2022)

## Introducing Structure View

Structure View presents a useful overview of the controlled impedance / insertion loss structures that exist on the stack up

Target Zo : 50 Single-Ended Layer 1, 4, 5, 8  
Target Zdiff : 100 Differential Layer 1, 4, 5, 8

	Zo	W1/W2	Zdiff	W1/W2	S1	W1/W2
1	49.54	9.9500 / 10.9500	99.94	7.0000 / 8.0000	8.8200	7.0000 / 8.0000
2						
3						
4	49.83	14.7500 / 15.7500	99.55	9.0000 / 10.0000	12.0000	9.0000 / 10.0000
5	49.83	15.7500 / 14.7500	99.55	10.0000 / 9.0000	12.0000	10.0000 / 9.0000
6						
7						
8	49.54	10.9500 / 9.9500	99.94	8.0000 / 7.0000	8.8200	8.0000 / 7.0000

Coated Microstrip 1B

Substrate 1 Height H1: 6.3500  
Substrate 1 Dielectric Er1: 4.2000  
Lower Trace Width W1: 10.9500  
Upper Trace Width W2: 9.9500  
Trace Thickness T1: 1.4000  
Coating Above Substrate C1: 1.0000  
Coating Above Trace C2: 1.0000  
Coating Dielectric CEr: 4.0000

Impedance Zo: 49.54  
Target Impedance: 50.00  
Target Tolerance %: 10.00

The new Structure View is positioned to the right of the existing stack up. All structures are aligned with the stack up electrical layers on which they reside

To access Structure View simply drag the stack up to the left or use the new Show / Hide Structure View tool bar button

## Introducing Structure View

Structures are arranged by Target Impedance, low to high, then by Structure Type.

All structures of the same Target Impedance and Structure Type will be positioned in the same column.

In this example there are 8 structures in total:

- 4 x 50 ohm singled-ended (column 1)
- 4 x 100 ohm differential (column 2)

The column header contains the Target Impedance, Structure Type and the layers where the structures reside.

Displaying 8 structures on All Layers

	target Zo : 50 Single-Ended Layer 1, 4, 5, 8	target Zdiff : 100 Differential Layer 1, 4, 5, 8				
	Zo	W1/W2	Zdiff	W1/W2	S1	W1/W2
1	49.54	9.9500 10.9500	99.94	7.0000 8.0000	8.8200	7.0000 8.0000
2						
3						
4	49.83	14.7500 15.7500	99.55	9.0000 10.0000	12.0000	9.0000 10.0000
5	49.83	15.7500 14.7500	99.55	10.0000 9.0000	12.0000	10.0000 9.0000
6						
7						
8	49.54	10.9500 9.9500	99.94	8.0000 7.0000	8.8200	8.0000 7.0000

Edge Coupled Coated Microstrip 1B

Substrate 1 Height	H1	6.3500
Substrate 1 Dielectric	Er1	4.2000
Lower Trace Width	W1	8.0000
Upper Trace Width	W2	7.0000
Trace Separation	S1	8.8200
Trace Thickness	T1	1.4000
Coating Above Substrate	C1	1.0000
Coating Above Trace	C2	1.0000
Coating Between Traces	C3	1.0000
Coating Dielectric	CEr	4.0000
<b>Differential Impedance</b>	Zd	99.94
Target Impedance		100.00

Within the column cell the structure calculated impedance and Lower / Upper Trace Widths (W1 / W2) and Trace Separation (S1) are shown.

The amount of data shown varies depending upon the Structure Type.

## Introducing Structure View

Structure View is interactive. Clicking on the golden trace will auto-switch to that structure on the Controlled Impedance tab

The transparent blue highlight reflects the current structure selected on the Controlled Impedance tab

The screenshot shows the 'Stack Up Editor' interface with the 'Controlled Impedance' tab active. The 'Structure View' on the left displays a table of 8 structures. The first structure is highlighted with a transparent blue background. The 'Controlled Impedance' tab on the right shows a cross-section diagram of a 'Coated Microstrip 1B' with various parameters and a table of values.

Structure	Zo	W1/W2	Zdiff	W1/W2	S1	W1/W2
1	49.54	9.9500 / 10.9500	99.94	7.0000 / 8.0000	8.8200	7.0000 / 8.0000
2						
4	49.83	14.7500 / 15.7500	99.55	9.0000 / 10.0000	12.0000	9.0000 / 10.0000
5	49.83	15.7500 / 14.7500	99.55	10.0000 / 9.0000	12.0000	10.0000 / 9.0000
6						
7						
8	49.54	10.9500 / 9.9500	99.94	8.0000 / 7.0000	8.8200	8.0000 / 7.0000

Substrate 1 Height	H1	6.3500
Substrate 1 Dielectric	Er1	4.2000
Lower Trace Width	W1	10.9500
Upper Trace Width	W2	9.9500
Trace Thickness	T1	1.4000
Coating Above Substrate	C1	1.0000
Coating Above Trace	C2	1.0000
Coating Dielectric	CEr	4.0000
<b>Impedance</b>	<b>Zo</b>	<b>49.54</b>
Target Impedance		50.00
Target Tolerance %		10.00

Browsing through the structures on the Controlled Impedance tab will auto highlight the structure on Structure View

# Introducing Structure View

Clicking the 'Filter by Layer' updates the view to show just structures on layer 4

Filtering structures by layer is useful when focusing on critical layers of the stack up.  
In this example layer 4 has been selected

Stack Up Editor | Controlled Impedance | CI Results

L 4 | 1 of 2

Displaying 2 structures on Layer 4

	Target Zo : 50 Single-Ended Layer 4	Target Zdiff : 100 Differential Layer 4
	Zo	Zdiff
1		
2		
3		
4	49.83	99.55
5		
6		
7		
8		

Microstrip Parameters:

- Substrate 1 Height: H1 = 27.2800
- Substrate 1 Dielectric: Er1 = 4.2000
- Substrate 2 Height: H2 = 15.2800
- Substrate 2 Dielectric: Er2 = 4.2000
- Lower Trace Width: W1 = 15.7500
- Upper Trace Width: W2 = 14.7500
- Trace Thickness: T1 = 1.4000

Impedance: Zo = 49.83

Target Impedance: 50.00


Target Tolerance %: 10.00

Stack Up Thickness = 60.8600


## Introducing Structure View

Use the mouse wheel to zoom out and show the complete stack up together with the structures.

All data is now visible in one view

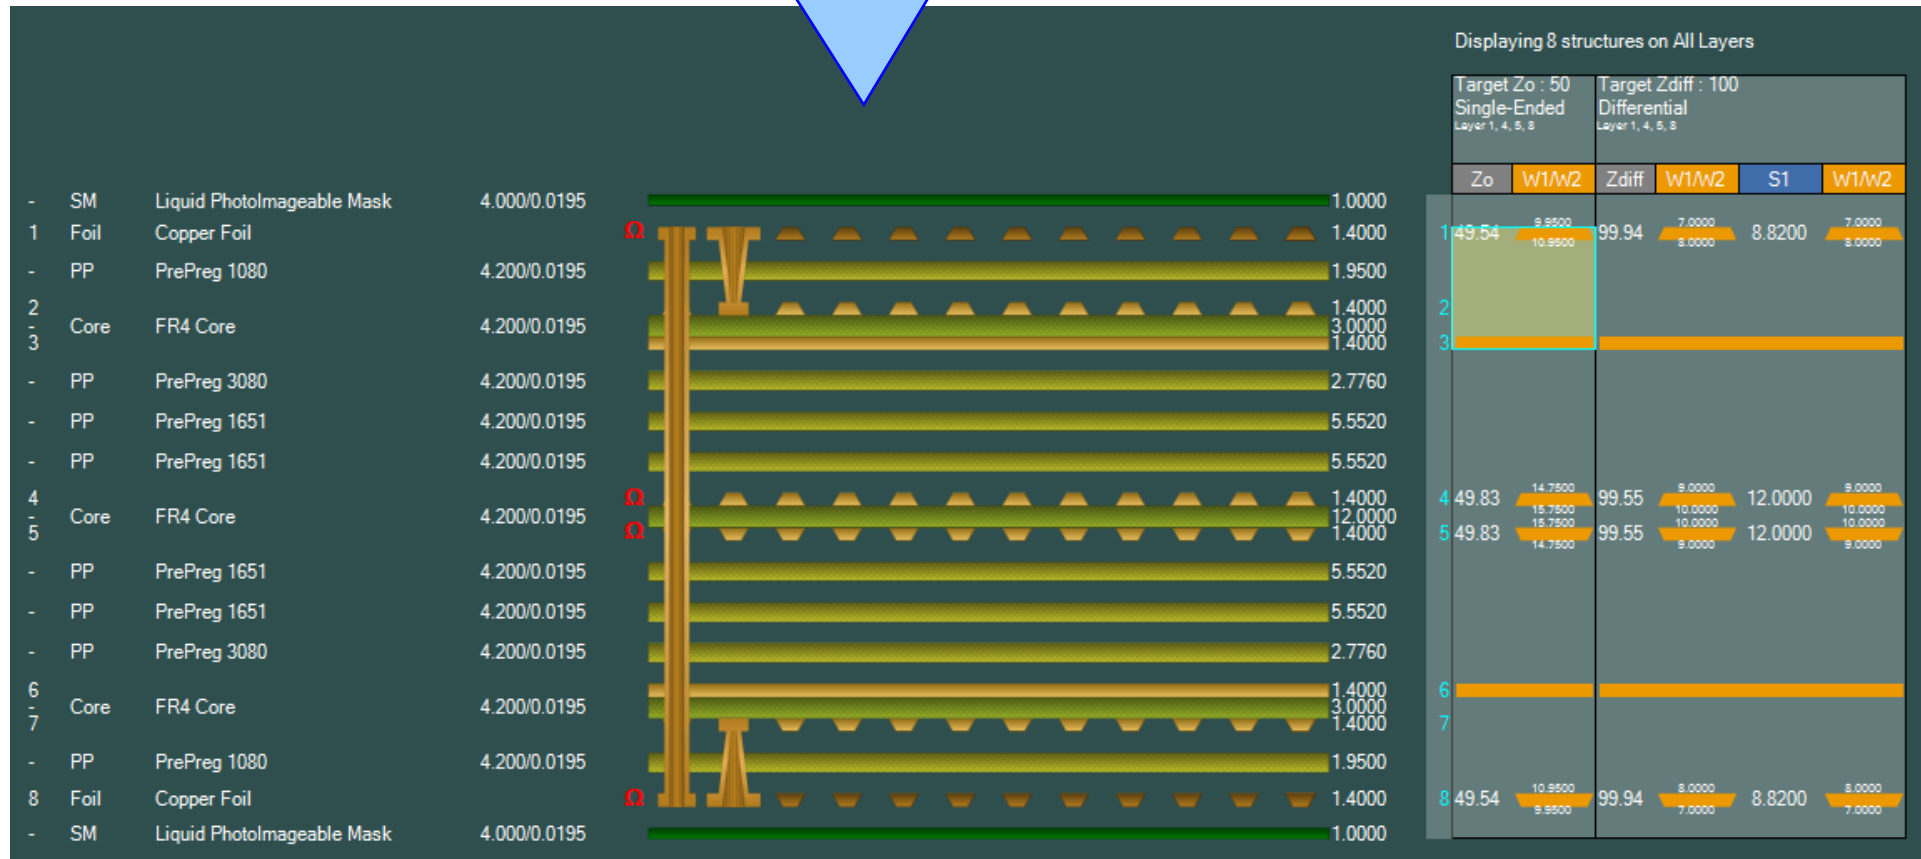

## Introducing Structure View

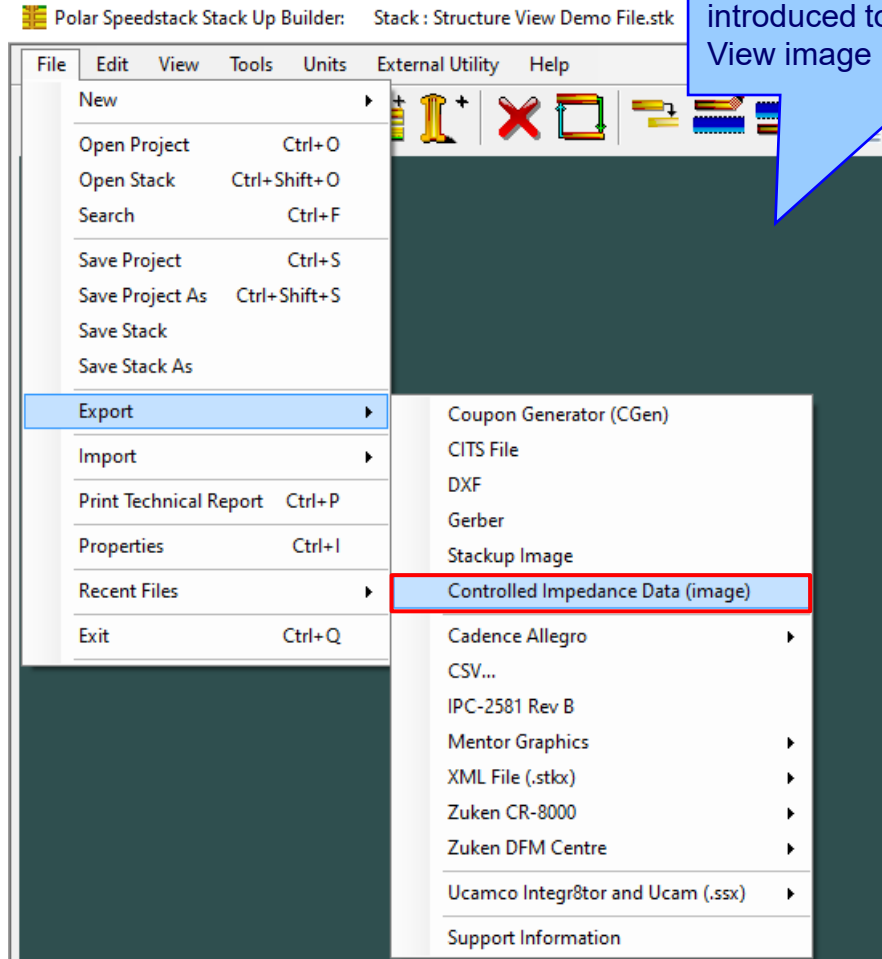

A new File | Export | Controlled Impedance Data option has been introduced to export the Structure View image

Displaying 8 structures on All Layers

Target Zo : 50 Single-Ended Layer 1, 4, 5, 8		Target Zdiff : 100 Differential Layer 1, 4, 5, 8				
	Zo	W1/W2	Zdiff	W1/W2	S1	W1/W2
1	49.54	9.9500 10.9500	99.94	7.0000 8.0000	8.8200	7.0000 8.0000
2						
3						
4	49.83	14.7500 15.7500	99.55	9.0000 10.0000	12.0000	9.0000 10.0000
5	49.83	15.7500 14.7500	99.55	10.0000 9.0000	12.0000	10.0000 9.0000
6						
7						
8	49.54	10.9500 9.9500	99.94	8.0000 7.0000	8.8200	8.0000 7.0000



## Online Library enhancements

The screenshot shows the 'Online Library' interface with the following sections:

- Filter by Supplier:** A scrollable list of suppliers including Nan Ya Plastics, Nelco, OAK-MITSUI TECHNOLOGIES (highlighted with a red box), and Panasonic.
- File Type:** A list of file types including Foils, RCCs, PrePregs, Cores (highlighted), SolderMasks, Idents, Peelables, Coverlays, BondPly, Adhesives, FlexCores, and Shields.
- Filter by Frequency:** Radio buttons for All, 1 GHz, 20 GHz, and 50 GHz.
- Library Files Available : OakMitsui:** A list of files such as OakMitsui\_FaradFlex\_MC12M\_1GHz\_2201.mlbx, OakMitsui\_FaradFlex\_MC12M\_1MHz\_2201.mlbx, etc.
- Existing Data Table:** Radio buttons for Clear and Append (selected), with explanatory text for each.
- Library Files Downloaded during this session:** An empty list box.
- File Access Mode:** Radio buttons for Online Polar Library (selected) and On-Premise Mode, with a text input field for the local path and a 'Browse...' button.

A blue callout box points to the OAK-MITSUI TECHNOLOGIES logo with the text: "Regular updates of materials and suppliers".

Please Note: This data is accurate to the best of our knowledge, however it is provided, as is from our Material supplier partners. Please feedback any errors or inaccuracies to Polarcare and we will contact the material partner for clarification or rectification.

# Speedstack v22.07.20 (July 2022)

## Introducing Grid View

Grid View presents the current stack up in an editable data grid form to allow for easy editing of multiple materials from a single dialog

Stack Up Collection Index	Material Class	Material Element	Electrical Layer	Material Layer Type ID	Layer Name	Description	Processed Thickness	Dielectric Constant	Loss Tangent
0	CSTSolderMask	Mask		SM		Liquid Photoimageable Mask	1.0000	4.0000	0.0195
1	CSTFoil	Copper	1	Foil	Top	Copper Foil	1.4000		
2	CSTPrePreg	Dielectric		PP		PrePreg 1080	1.9500	4.2000	0.0195
3	CSTCore	UpperCopper	2		Inner 2		1.4000		
3	CSTCore	Dielectric		Core		FR4 Core	3.0000	4.2000	0.0195
3	CSTCore	LowerCopper	3		Inner 3		1.4000		
4	CSTPrePreg	Dielectric		PP		PrePreg 3080	2.7760	4.2000	0.0195
5	CSTPrePreg	Dielectric		PP		PrePreg 1651	5.5520	4.2000	0.0195
6	CSTPrePreg	Dielectric		PP		PrePreg 1651	5.5520	4.2000	0.0195
7	CSTCore	UpperCopper	4		Inner 4		1.4000		
7	CSTCore	Dielectric		Core		FR4 Core	12.0000	4.2000	0.0195
7	CSTCore	LowerCopper	5		Inner 5		1.4000		
8	CSTPrePreg	Dielectric		PP		PrePreg 1651	5.5520	4.2000	0.0195
9	CSTPrePreg	Dielectric		PP		PrePreg 1651	5.5520	4.2000	0.0195
10	CSTPrePreg	Dielectric				PrePreg 3080	2.7760	4.2000	0.0195
11	CSTCore	UpperCopper			Inner 6		1.4000		
						FR4 Core	3.0000	4.2000	0.0195
					Inner 7		1.4000		
						PrePreg 1080	1.9500	4.2000	0.0195
					Bottom	Copper Foil	1.4000		
						Liquid Photoimageable Mask	1.0000	4.0000	0.0195

Grid View allows for quick editing of key stack up information such as Material Description, Processed Thickness, Dielectric Constant and Loss Tangent.

The stack up data from Grid View can also be edited in Microsoft Excel using the Grid View copy and paste functions

Changes in Grid View can be saved back to the original stack up design

## Introducing Grid View

Grid View
— □ ×

Stack Up Collection Index	Material Class	Material Element	Electrical Layer	Material Type	Layer Name	Description	Processed Thickness	Dielectric Constant	Loss Tangent
0	CSTSolderMask	Mask		SM			1.0000	4.0000	0.0195
1	CSTFoil	Copper	1	Foil			1.4000		
2	CSTPrePreg	Dielectric		PP			1.9500	4.2000	0.0195
3	CSTCore	UpperCopper	2		Inner 2		1.4000		
3	CSTCore	Dielectric		Core		FR4 Core	3.0000	4.2000	0.0195
3	CSTCore	LowerCopper	3		Inner 3		1.4000		
4	CSTPrePreg	Dielectric		PP		PrePreg 3080	2.7760	4.2000	0.0195
5	CSTPrePreg	Dielectric		PP		PrePreg 1651	5.5520	4.2000	0.0195
6	CSTPrePreg	Dielectric		PP		PrePreg 1651	5.5520	4.2000	0.0195
7	CSTCore	UpperCopper	4		Inner 4		1.4000		
7	CSTCore	Dielectric		Core		FR4 Core	12.0000	4.2000	0.0195
7	CSTCore	LowerCopper	5		Inner 5		1.4000		
8	CSTPrePreg	Dielectric		PP		PrePreg 1651	5.5520	4.2000	0.0195
9	CSTPrePreg	Dielectric		PP		PrePreg 1651	5.5520	4.2000	0.0195
10	CSTPrePreg	Dielectric		PP		PrePreg 3080	2.7760	4.2000	0.0195
11	CSTCore	UpperCopper	6		Inner 6		1.4000		
11	CSTCore	Dielectric		Core		FR4 Core	3.0000	4.2000	0.0195
11	CSTCore	LowerCopper	7		Inner 7		1.4000		
12	CSTPrePreg	Dielectric		PP		PrePreg 1080	1.9500	4.2000	0.0195
13	CSTFoil	Copper	8	Foil	Bottom	Copper Foil	1.4000		
14	CSTSolderMask	Mask		SM		Liquid Photoimageable Mask	1.0000	4.0000	0.0195

**NOTE:** In order to preserve stack integrity – some fields are locked.

Use the right-click menu to copy / paste the Grid View to the clipboard - the data may then be edited with Excel  
 Layer Name, Description, Processed Thickness, Dielectric Constant and Loss Tangent columns are editable, other columns are read-only  
 Processed Thickness = Copper.FinishedThickness, Dielectric.IsolationDistance, SolderMask.MaskThickness, Coverlay.FinishedThickness

## Introducing Grid View

Grid View has many uses, some are highlighted here:

1. Key information for the whole stack up can be edited from a single dialog / screen
2. If changes to the original stack up design are made by the fabricator during the manufacturing stage, these can be quickly evaluated by updating the Processed Thickness, Dielectric Constant and Loss Tangent cells. The impact of these changes on stack up thickness, controlled impedance and insertion loss calculations can then be quickly evaluated
3. Plated layer thicknesses can be adjusted quickly and easily
4. Layer Names can be quickly assigned to electrical layers

Stack Up Collection Index	Material Class	Material Element	Electrical Layer	Material Layer Type ID	Layer Name	Processed Thickness	Dielectric Constant	Loss Tangent
0	CSTSolderMask	Mask		SM				
1	CSTFoil	Copper	1	Foil	Top		4.0000	0.0195
2	CSTPrePreg	Dielectric		PP			4.2000	0.0195
3	CSTCore	UpperCopper	2		Inner			
3	CSTCore	Dielectric		Core			4.2000	0.0195
3	CSTCore	LowerCopper	3		Inner			
4	CSTPrePreg	Dielectric		PP			4.2000	0.0195
5	CSTPrePreg	Dielectric		PP			4.2000	0.0195
6	CSTPrePreg	Dielectric		PP		5.5520	4.2000	0.0195
7	CSTCore	UpperCopper	4		Inner 4	1.4000		
7	CSTCore	Dielectric		Core		FR4 Core	12.0000	4.2000
7	CSTCore	LowerCopper	5		Inner 5	1.4000		
8	CSTPrePreg	Dielectric		PP		PrePreg 1651	5.5520	4.2000
9	CSTPrePreg	Dielectric		PP		PrePreg 1651	5.5520	4.2000
10	CSTPrePreg	Dielectric		PP		PrePreg 3080	2.7760	4.2000
11	CSTCore	UpperCopper	6		Inner 6	1.4000		
11	CSTCore	Dielectric		Core		FR4 Core	3.0000	4.2000
11	CSTCore	LowerCopper	7		Inner 7	1.4000		
12	CSTPrePreg	Dielectric		PP		PrePreg 1080	1.9500	4.2000
13	CSTFoil	Copper	8	Foil	Bottom	Copper Foil	1.4000	
14	CSTSolderMask	Mask		SM		Liquid Photoimageable Mask	1.0000	4.0000

Use the right-click menu to copy / paste the Grid View to the clipboard - the data may then be edited with Excel  
 Layer Name, Description, Processed Thickness, Dielectric Constant and Loss Tangent columns are editable, other columns are read-only  
 Processed Thickness = Copper.FinishedThickness, Dielectric.IsolationDistance, SolderMask.MaskThickness, Coverlay.FinishedThickness

Apply Cancel

## Grid View – Walkthrough Step #1

Step #1  
An 8 layer stack up is loaded into the Speedstack editor. To examine and edit this stack up in Grid View select the new toolbar button

**Stack Up Builder: Stack: Eval Imperial.stk Project: Eval Imperial.sci**

Layer	Material	Thickness (mm)	Order
-	SM Liquid PhotoImageable Mask	4.000/0.0195	1.0000
1	Foil Copper Foil	1.4000	1.4000
-	PP PrePreg 1080	4.200/0.0195	1.9500
2	Core FR4 Core	4.200/0.0195	1.4000
3	Core FR4 Core	4.200/0.0195	3.0000
-	PP PrePreg 3080	4.200/0.0195	2.7760
-	PP PrePreg 1651	4.200/0.0195	5.5520
-	PP PrePreg 1651	4.200/0.0195	5.5520
4	Core FR4 Core	4.200/0.0195	1.4000
5	Core FR4 Core	4.200/0.0195	12.0000
-	PP PrePreg 1651	4.200/0.0195	1.4000
-	PP PrePreg 1651	4.200/0.0195	5.5520
-	PP PrePreg 1651	4.200/0.0195	5.5520
-	PP PrePreg 3080	4.200/0.0195	2.7760
6	Core FR4 Core	4.200/0.0195	1.4000
7	Core FR4 Core	4.200/0.0195	3.0000
-	PP PrePreg 1080	4.200/0.0195	1.4000
8	Foil Copper Foil	1.4000	1.4000
-	SM Liquid PhotoImageable Mask	4.000/0.0195	1.0000

Parameter	Value
Substrate 1 Height	H1 6.3500
Substrate 1 Dielectric	Er1 4.2000
Lower Trace Width	W1 7.6500
Upper Trace Width	W2 6.6500
Trace Separation	S1 8.1150
Trace Thickness	T1 1.4000
Coating Above Substrate	C1 1.0000
Coating Above Trace	C2 1.0000
Coating Between Traces	C3 1.0000
Coating Dielectric	CEr 4.0000
<b>Differential Impedance</b>	<b>Zd 100.29</b>
Target Impedance	100.00
Target Tolerance %	10.00

Stack Up Editor | DRC: 0 | Controlled Impedance | CI Results

Stack Up Thickness = 60.0000 | Stack Up Thickness = 60.8600 | Stack Up Thickness with Soldermask = 62.8600 | V22.07.20

## Grid View – Walkthrough Step #2

Step #2  
Using the Grid View editor the following cells are amended. Layer Names have been changed and Processed Thickness adjusted

Grid View

Stack Up Collection Index	Material Class	Material Element	Electrical Layer	Material Layer Type ID	Layer Name	Description	Processed Thickness	Dielectric Constant	Loss Tangent
0	CSTSolderMask	Mask		SM		Liquid PhotoImageable Mask	1.0000	4.0000	0.0195
1	CSTFoil	Copper	1	Foil	Top	Copper Foil	1.4000		
2	CSTPrePreg	Dielectric		PP		PrePreg 1080	1.9500	4.2000	0.0195
3	CSTCore	UpperCopper	2		Inner 2		1.4000		
3	CSTCore	Dielectric		Core		FR4 Core	3.0000	4.2000	0.0195
3	CSTCore	LowerCopper	3		Power		1.4000		
4	CSTPrePreg	Dielectric		PP		PrePreg 3080	2.5000	4.2000	0.0195
5	CSTPrePreg	Dielectric		PP		PrePreg 1651	2.5000	4.2000	0.0195
6	CSTPrePreg	Dielectric		PP		PrePreg 1651	6.0000	4.2000	0.0195
7	CSTCore	UpperCopper	4		Inner 4		1.4000		
7	CSTCore	Dielectric		Core		FR4 Core	12.0000	4.2000	0.0195
7	CSTCore	LowerCopper	5		Inner 5		1.4000		
8	CSTPrePreg	Dielectric		PP		PrePreg 1651	6.0000	4.2000	0.0195
9	CSTPrePreg	Dielectric		PP		PrePreg 1651	6.0000	4.2000	0.0195
10	CSTPrePreg	Dielectric		PP		PrePreg 3080	2.5000	4.2000	0.0195
11	CSTCore	UpperCopper	6		Ground		1.4000		
11	CSTCore	Dielectric		Core		FR4 Core	3.0000	4.2000	0.0195
11	CSTCore	LowerCopper	7		Inner 7		1.4000		
12	CSTPrePreg	Dielectric		PP		PrePreg 1080	1.9500	4.2000	0.0195
13	CSTFoil	Copper	8	Foil	Bottom	Copper Foil	1.4000		
14	CSTSolderMask	Mask		SM		Liquid PhotoImageable Mask	1.0000	4.0000	0.0195

Use the right-click menu to copy / paste the Grid View to the clipboard - the data may then be edited with Excel  
 Layer Name, Description, Processed Thickness, Dielectric Constant and Loss Tangent columns are editable, other columns are read only  
 Processed Thickness = Copper.FinishedThickness, Dielectric.IsolationDistance, SolderMask.MaskThickness, Coverlay.FinishedThickness

Apply Cancel

Selecting Apply will save the changes back to the stack up editor



## Grid View – Walkthrough Step #3

The screenshot shows the Polar Speedstack Stack Up Builder interface. The main window displays a grid view of the PCB stack-up layers. The layers are listed on the left, and their thicknesses are shown on the right. A central 3D visualization shows the layers stacked on top of each other. The right-hand panel contains 'Stack Up Information' and 'Selected Item Information' sections. A callout box points to the 'Layer Name' field in the 'Selected Item Information' section, which has been changed to 'Power'. Another callout box points to the 'Processed Thickness' field in the same section, which has been adjusted to 1.4000. A third callout box points to the 'Stack Up Editor' toolbar, indicating that changes made under Grid View are now applied back to the stack up editor.

Layer	Material	Thickness (mm)	Processed Thickness (mm)
- SM	Liquid Photoimageable Mask	4.000/0.0195	1.0000
1	Foil Copper Foil		1.4000
- PP	PrePreg 1080	4.200/0.0195	1.9500
2	Core FR4 Core	4.200/0.0195	1.4000
3	Core FR4 Core	4.200/0.0195	3.0000
			1.4000
- PP	PrePreg 3080	4.200/0.0195	2.5000
- PP	PrePreg 1651	4.200/0.0195	2.5000
- PP	PrePreg 1651	4.200/0.0195	6.0000
4	Core FR4 Core	4.200/0.0195	1.4000
5	Core FR4 Core	4.200/0.0195	12.0000
			1.4000
- PP	PrePreg 1651	4.200/0.0195	6.0000
- PP	PrePreg 1651	4.200/0.0195	6.0000
- PP	PrePreg 3080	4.200/0.0195	2.5000
6	Core FR4 Core	4.200/0.0195	1.4000
7	Core FR4 Core	4.200/0.0195	3.0000
			1.4000
- PP	PrePreg 1080	4.200/0.0195	1.9500
8	Foil Copper Foil		1.4000
- SM	Liquid Photoimageable Mask	4.000/0.0195	1.0000


Step #3  
Changes made under Grid View are now applied back to the stack up editor.

Layer Name change

Processed Thickness adjustments

## Using Grid View with Microsoft Excel – Step #1

Step #1  
From within Grid View use the right-click menu and select the Copy to Clipboard option.

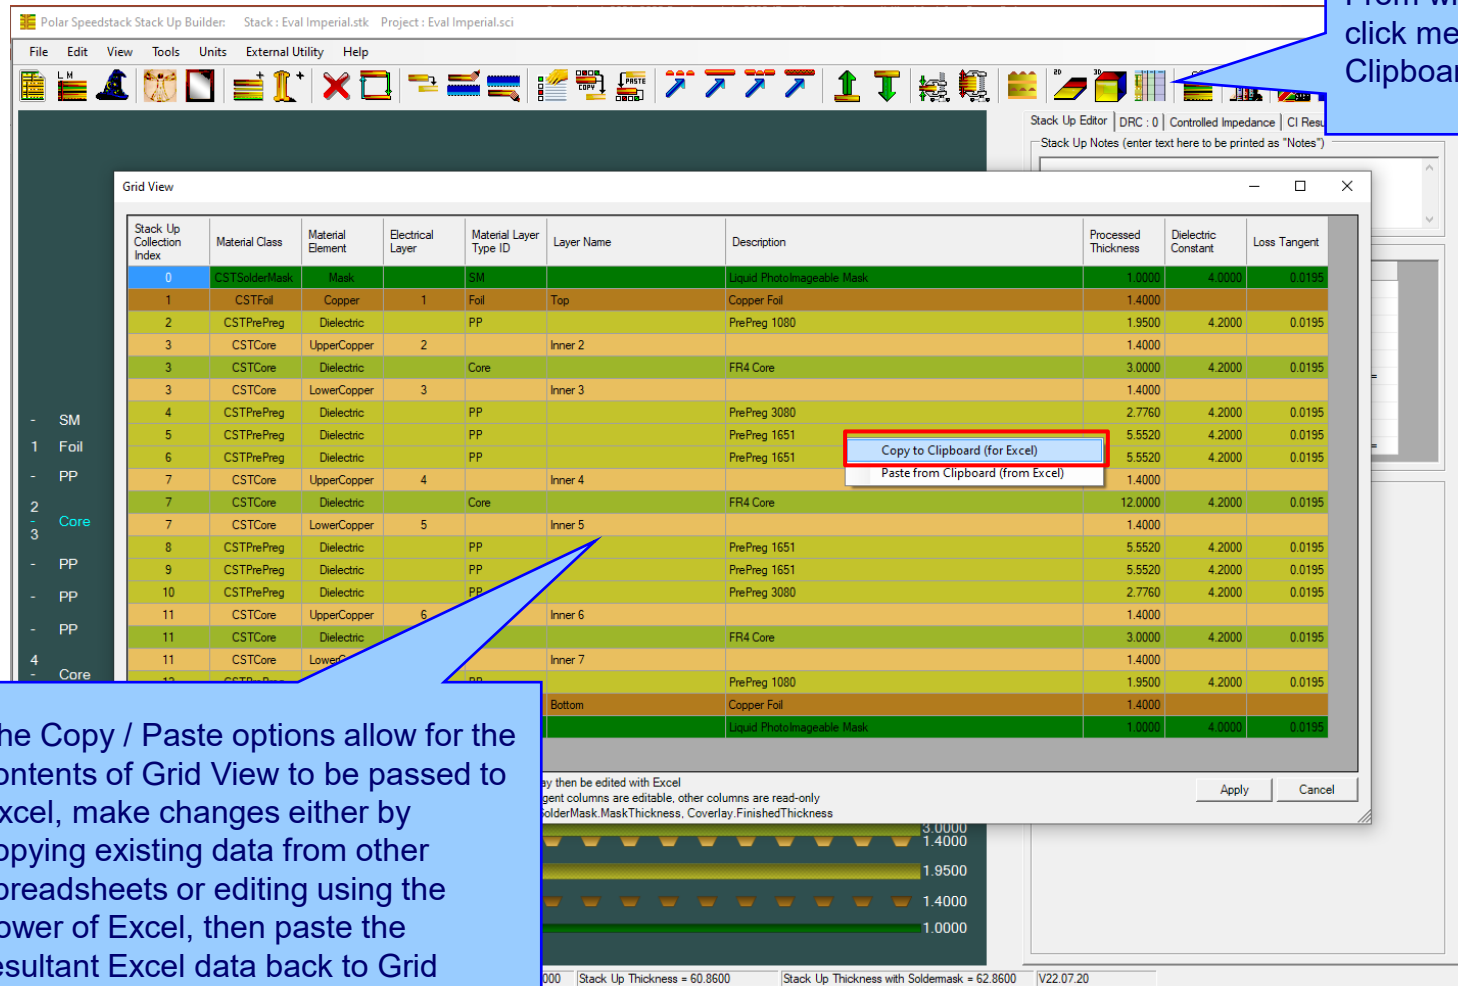


Stack Up Collection Index	Material Class	Material Element	Electrical Layer	Material Layer Type ID	Layer Name	Description	Processed Thickness	Dielectric Constant	Loss Tangent
0	CSTSolderMask	Mask		SM		Liquid PhotoImageable Mask	1.0000	4.0000	0.0195
1	CSTFoil	Copper	1	Foil	Top	Copper Foil	1.4000		
2	CSTPrePreg	Dielectric		PP		PrePreg 1080	1.9500	4.2000	0.0195
3	CSTCore	UpperCopper	2		Inner 2		1.4000		
3	CSTCore	Dielectric		Core		FR4 Core	3.0000	4.2000	0.0195
3	CSTCore	LowerCopper	3		Inner 3		1.4000		
4	CSTPrePreg	Dielectric		PP		PrePreg 3080	2.7760	4.2000	0.0195
5	CSTPrePreg	Dielectric		PP		PrePreg 1651	5.5520	4.2000	0.0195
6	CSTPrePreg	Dielectric		PP		PrePreg 1651	5.5520	4.2000	0.0195
7	CSTCore	UpperCopper	4		Inner 4		1.4000		
7	CSTCore	Dielectric		Core		FR4 Core	12.0000	4.2000	0.0195
7	CSTCore	LowerCopper	5		Inner 5		1.4000		
8	CSTPrePreg	Dielectric		PP		PrePreg 1651	5.5520	4.2000	0.0195
9	CSTPrePreg	Dielectric		PP		PrePreg 1651	5.5520	4.2000	0.0195
10	CSTPrePreg	Dielectric		PP		PrePreg 3080	2.7760	4.2000	0.0195
11	CSTCore	UpperCopper	6		Inner 6		1.4000		
11	CSTCore	Dielectric		PP		FR4 Core	3.0000	4.2000	0.0195
11	CSTCore	LowerCopper			Inner 7		1.4000		
						PrePreg 1080	1.9500	4.2000	0.0195
					Bottom	Copper Foil	1.4000		
						Liquid PhotoImageable Mask	1.0000	4.0000	0.0195

The Copy / Paste options allow for the contents of Grid View to be passed to Excel, make changes either by copying existing data from other spreadsheets or editing using the power of Excel, then paste the resultant Excel data back to Grid View.

## Using Grid View with Microsoft Excel – Step #2

Step #2  
Open Excel and paste the clipboard contents to a worksheet

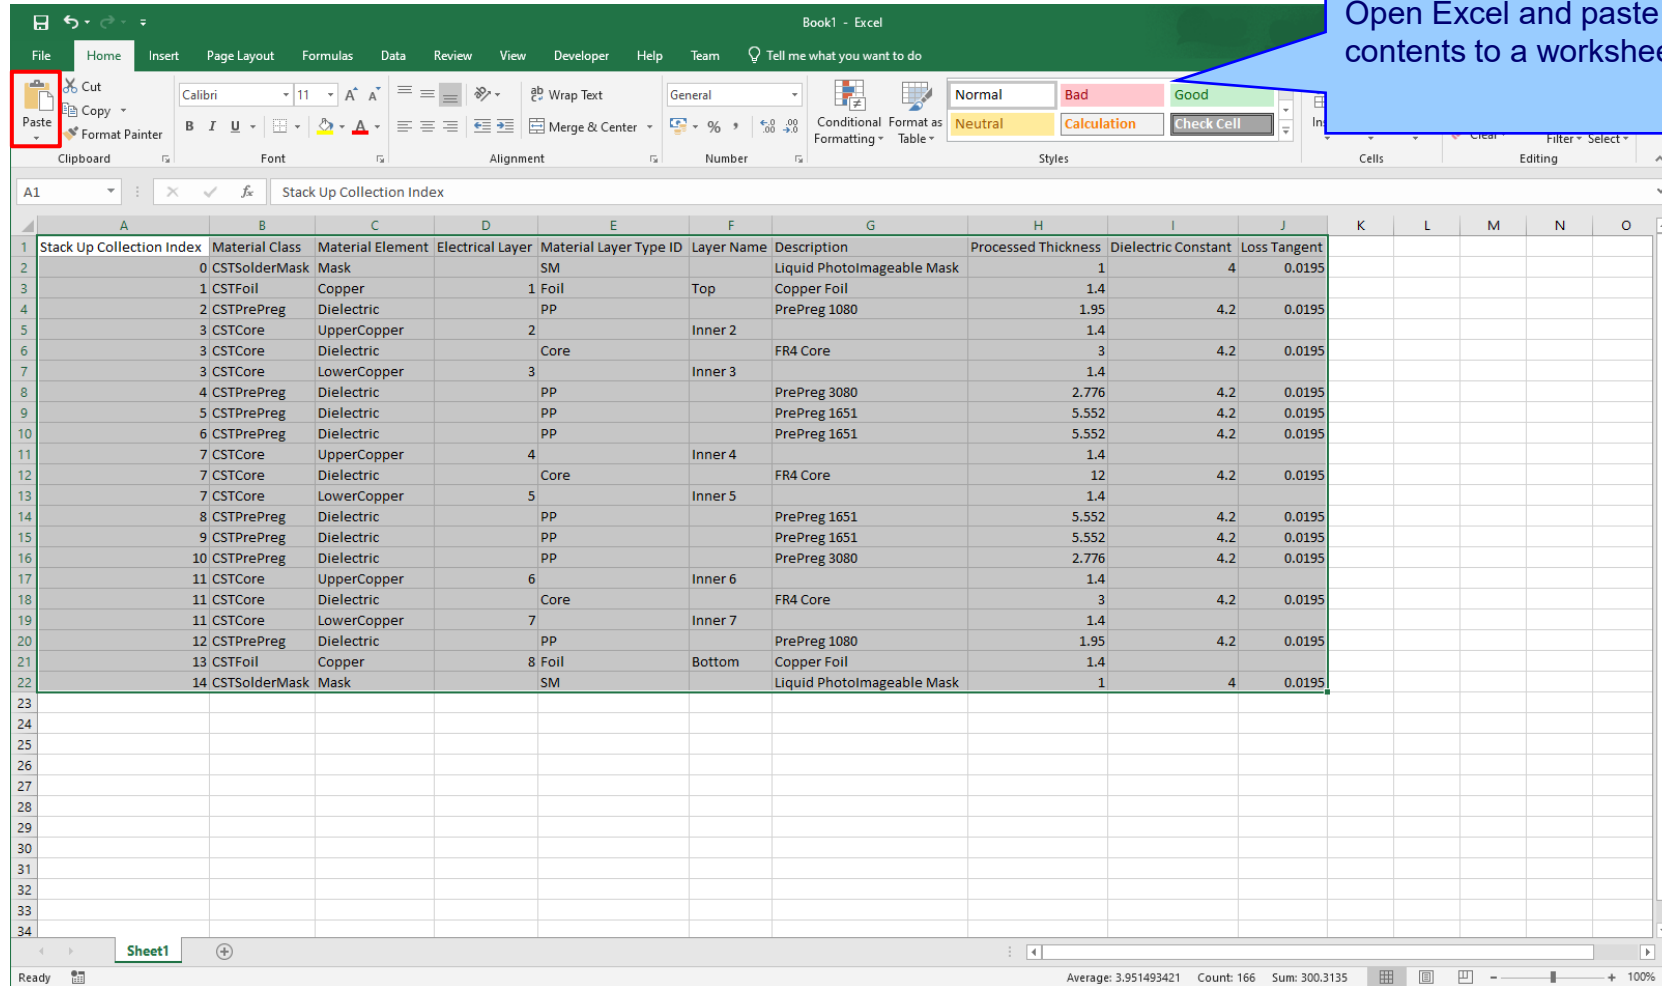

The screenshot shows the Microsoft Excel interface with the following data table:

Stack Up Collection Index	Material Class	Material Element	Electrical Layer	Material Layer Type ID	Layer Name	Description	Processed Thickness	Dielectric Constant	Loss Tangent
0	CSTSolderMask	Mask		SM		Liquid PhotoImageable Mask	1	4	0.0195
1	CSTFoil	Copper	1	Foil	Top	Copper Foil	1.4		
2	CSTPrePreg	Dielectric		PP		PrePreg 1080	1.95	4.2	0.0195
3	CSTCore	UpperCopper	2		Inner 2		1.4		
3	CSTCore	Dielectric		Core		FR4 Core	3	4.2	0.0195
3	CSTCore	LowerCopper	3		Inner 3		1.4		
4	CSTPrePreg	Dielectric		PP		PrePreg 3080	2.776	4.2	0.0195
5	CSTPrePreg	Dielectric		PP		PrePreg 1651	5.552	4.2	0.0195
6	CSTPrePreg	Dielectric		PP		PrePreg 1651	5.552	4.2	0.0195
7	CSTCore	UpperCopper	4		Inner 4		1.4		
7	CSTCore	Dielectric		Core		FR4 Core	12	4.2	0.0195
7	CSTCore	LowerCopper	5		Inner 5		1.4		
8	CSTPrePreg	Dielectric		PP		PrePreg 1651	5.552	4.2	0.0195
9	CSTPrePreg	Dielectric		PP		PrePreg 1651	5.552	4.2	0.0195
10	CSTPrePreg	Dielectric		PP		PrePreg 3080	2.776	4.2	0.0195
11	CSTCore	UpperCopper	6		Inner 6		1.4		
11	CSTCore	Dielectric		Core		FR4 Core	3	4.2	0.0195
11	CSTCore	LowerCopper	7		Inner 7		1.4		
12	CSTPrePreg	Dielectric		PP		PrePreg 1080	1.95	4.2	0.0195
13	CSTFoil	Copper	8	Foil	Bottom	Copper Foil	1.4		
14	CSTSolderMask	Mask		SM		Liquid PhotoImageable Mask	1	4	0.0195

## Using Grid View with Microsoft Excel – Step #3

Step #3  
The Processed Thickness cells highlighted in red have been changed

Stack Up Collection Index	Material Class	Material Element	Electrical Layer	Material Layer Type ID	Layer Name	Description	Processed Thickness	Dielectric Constant	Loss Tangent
0	CSTSolderMask	Mask		SM		Liquid PhotolImageable Mask	1	4	0.0195
1	CSTFoil	Copper	1	Foil	Top	Copper Foil	1.5		
2	CSTPrePreg	Dielectric		PP		PrePreg 1080	2.1	4.2	0.0195
3	CSTCore	UpperCopper	2		Inner 2		1.4		
3	CSTCore	Dielectric		Core		FR4 Core	3	4.2	0.0195
3	CSTCore	LowerCopper	3		Inner 3		1.4		
4	CSTPrePreg	Dielectric		PP		PrePreg 3080	2.776	4.2	0.0195
5	CSTPrePreg	Dielectric		PP		PrePreg 1651	5.552	4.2	0.0195
6	CSTPrePreg	Dielectric		PP		PrePreg 1651	5.552	4.2	0.0195
7	CSTCore	UpperCopper	4		Inner 4		1.4		
7	CSTCore	Dielectric		Core		FR4 Core	10	4.2	0.0195
7	CSTCore	LowerCopper	5		Inner 5		1.4		
8	CSTPrePreg	Dielectric		PP		PrePreg 1651	5.552	4.2	0.0195
9	CSTPrePreg	Dielectric		PP		PrePreg 1651	5.552	4.2	0.0195
10	CSTPrePreg	Dielectric		PP		PrePreg 3080	2.776	4.2	0.0195
11	CSTCore	UpperCopper	6		Inner 6		1.4		
11	CSTCore	Dielectric		Core		FR4 Core	3	4.2	0.0195
11	CSTCore	LowerCopper	7		Inner 7		1.4		
12	CSTPrePreg	Dielectric		PP		PrePreg 1080	2.1	4.2	0.0195
13	CSTFoil	Copper	8	Foil	Bottom	Copper Foil	1.5		
14	CSTSolderMask	Mask		SM		Liquid PhotolImageable Mask	1	4	0.0195

**NOTE:** In order to preserve stack integrity, materials should not be added or removed at this step. Add/remove of materials needs to be performed in the Speedstack editor to allow validation to be performed.

## Using Grid View with Microsoft Excel – Step #4

Step #4  
Once the Excel changes are complete select the range of cells representing the whole stack up data and select Copy

Stack Up Collection Index	Material Class	Material Element	Electrical Layer	Material Layer Type ID	Layer Name	Description	Processed Thickness	Dielectric Constant	Loss Tangent
0	CSTSolderMask	Mask		SM		Liquid PhotoImageable Mask	1	4	0.0195
1	CSTFoil	Copper	1	Foil	Top	Copper Foil	1.5		
2	CSTPrePreg	Dielectric		PP		PrePreg 1080	2.1	4.2	0.0195
3	CSTCore	UpperCopper	2		Inner 2		1.4		
3	CSTCore	Dielectric		Core		FR4 Core	3	4.2	0.0195
3	CSTCore	LowerCopper	3		Inner 3		1.4		
4	CSTPrePreg	Dielectric		PP		PrePreg 3080	2.776	4.2	0.0195
5	CSTPrePreg	Dielectric		PP		PrePreg 1651	5.552	4.2	0.0195
6	CSTPrePreg	Dielectric		PP		PrePreg 1651	5.552	4.2	0.0195
7	CSTCore	UpperCopper	4		Inner 4		1.4		
7	CSTCore	Dielectric		Core		FR4 Core	10	4.2	0.0195
7	CSTCore	LowerCopper	5		Inner 5		1.4		
8	CSTPrePreg	Dielectric		PP		PrePreg 1651	5.552	4.2	0.0195
9	CSTPrePreg	Dielectric		PP		PrePreg 1651	5.552	4.2	0.0195
10	CSTPrePreg	Dielectric		PP		PrePreg 3080	2.776	4.2	0.0195
11	CSTCore	UpperCopper	6		Inner 6		1.4		
11	CSTCore	Dielectric		Core		FR4 Core	3	4.2	0.0195
11	CSTCore	LowerCopper	7		Inner 7		1.4		
12	CSTPrePreg	Dielectric		PP		PrePreg 1080	2.1	4.2	0.0195
13	CSTFoil	Copper	8	Foil	Bottom	Copper Foil	1.5		
14	CSTSolderMask	Mask		SM		Liquid PhotoImageable Mask	1	4	0.0195

## Using Grid View with Microsoft Excel – Step #5

Step #5  
 Back in Grid View select the right-click menu Paste from Clipboard option and Grid View will update with the data from Excel. Notice how the data now matches Excel

Grid View

Stack Up Collection Index	Material Class	Material Element	Electrical Layer	Material Layer Type ID	Layer Name	Description			
0	CSTSolderMask	Mask		SM		Liquid PhotoImageable Mask	1.0000	4.0000	0.0195
1	CSTFoil	Copper	1	Foil	Top	Copper Foil	1.5000		
2	CSTPrePreg	Dielectric		PP		PrePreg 1080	2.1000	4.2000	0.0195
3	CSTCore	UpperCopper	2		Inner 2		1.4000		
3	CSTCore	Dielectric		Core		FR4 Core	3.0000	4.2000	0.0195
3	CSTCore	LowerCopper	3		Inner 3		1.4000		
4	CSTPrePreg	Dielectric		PP		PrePreg 3080	2.7760	4.2000	0.0195
5	CSTPrePreg	Dielectric		PP		PrePreg 1651	5.5520	4.2000	0.0195
6	CSTPrePreg	Dielectric		PP		PrePreg 1651	5.5520	4.2000	0.0195
7	CSTCore	UpperCopper	4		Inner 4		1.4000		
7	CSTCore	Dielectric		Core		FR4 Core	10.0000	4.2000	0.0195
7	CSTCore	LowerCopper	5		Inner 5		1.4000		
8	CSTPrePreg	Dielectric		PP		PrePreg 1651	5.5520	4.2000	0.0195
9	CSTPrePreg	Dielectric		PP		PrePreg 1651	5.5520	4.2000	0.0195
10	CSTPrePreg	Dielectric		PP		PrePreg 3080	2.7760	4.2000	0.0195
11	CSTCore	UpperCopper	6		Inner 6		1.4000		
11	CSTCore	Dielectric		Core		FR4 Core	3.0000	4.2000	0.0195
11	CSTCore	LowerCopper	7		Inner 7		1.4000		
12	CSTPrePreg	Dielectric		PP		PrePreg 1080	2.1000	4.2000	0.0195
13	CSTFoil	Copper	8	Foil	Bottom	Copper Foil	1.5000		
14	CSTSolderMask	Mask		SM		Liquid PhotoImageable Mask	1.0000	4.0000	0.0195

Copy to Clipboard (for Excel)  
 Paste from Clipboard (from Excel)

Use the right-click menu to copy / paste the Grid View to the clipboard - the data may then be edited with Excel  
 Layer Name, Description, Processed Thickness, Dielectric Constant and Loss Tangent columns are editable, other columns are read-only  
 Processed Thickness = Copper.FinishedThickness, Dielectric.IsolationDistance, SolderMask.MaskThickness, Coverlay.FinishedThickness

Apply Cancel

## Using Grid View with Microsoft Excel – Step #6

Step #6  
 Selecting Apply in Grid View will update the stack up with the data that was originally changed in Excel

The screenshot shows the Polar Speedstack Stack Up Builder interface. The main window displays a grid view of a PCB stack up. The grid consists of several columns: a layer number column, a material description column, a thickness column, a cumulative thickness column, and a visual representation of the layer. The layers are as follows:

Layer	Material	Thickness	Cumulative Thickness
-	SM Liquid PhotoImageable Mask	4.000/0.0195	1.0000
1	Foil Copper Foil	1.5000	1.5000
-	PP PrePreg 1080	4.200/0.0195	2.1000
2	Core FR4 Core	1.4000	3.0000
3	Core FR4 Core	3.0000	1.4000
-	PP PrePreg 3080	4.200/0.0195	2.7760
-	PP PrePreg 1651	4.200/0.0195	5.5520
-	PP PrePreg 1651	4.200/0.0195	5.5520
4	Core FR4 Core	1.4000	10.0000
5	Core FR4 Core	1.4000	1.4000
-	PP PrePreg 1651	4.200/0.0195	5.5520
-	PP PrePreg 1651	4.200/0.0195	5.5520
-	PP PrePreg 3080	4.200/0.0195	2.7760
6	Core FR4 Core	1.4000	1.4000
7	Core FR4 Core	3.0000	1.4000
-	PP PrePreg 1080	4.200/0.0195	2.1000
8	Foil Copper Foil	1.5000	1.5000
-	SM Liquid PhotoImageable Mask	4.000/0.0195	1.0000

The right-hand panel shows the 'Stack Up Information' section with the following data:

Field	Value
Electrical Layer Count	8
Stack Up Cost	54.00
Copper Thickness	11.4000
Dielectric Thickness	47.9600
Solder Mask Thickness	2.0000
Target Stack Up Thickness	60.0000
Stack Up Thickness	59.3600
Stack Up Thickness with Soldermask	61.3600

The status bar at the bottom of the window displays: Target Stack Up Thickness = 60.0000 | Stack Up Thickness = 59.3600 | Stack Up Thickness with Soldermask = 61.3600 | V22.07.20

## Other enhancements

- Stack Up Notes user interface improvements
- The Tools | Options | Structure Defaults | Separation Region Dielectric (REr) now supports double data types. Previously, it only supported integers



# Speedstack v22.05.06 (May 2022)

## Online Library enhancements

The screenshot shows the 'Online Library' application window. On the left, under 'Filter by Supplier', the 'AGC' logo is highlighted with a red box. A blue callout bubble points to this box with the text: 'AGC have recently joined the Polar Material Partner program'. The 'File Type' list on the left includes 'PrePregs' which is selected. The 'Library Files Available : AGC' list contains various .mlbx files such as 'AGC\_Mercurywave\_9350\_10GHz\_2201.mlbx' and 'AGC\_MW1000\_10GHz\_2201.mlbx'. On the right, the 'Existing Data Table' section has 'Append' selected. At the bottom, the 'File Access Mode' is set to 'Online Polar Library ( ftp://polarinstruments.com )'. A text box at the bottom contains the path 'C:\Users\richa\Desktop\Material\_Library\_2021' and a 'Browse...' button. A disclaimer note is at the very bottom.

## Embedded Microstrip structure enhancements

Improvements to the way the impedance structure substrate height (H parameter values) are calculated for Embedded Microstrip structures when the outer electrical layer is designated as Mixed

Layer	Material	Thickness (Mils/Thous)	Height
-	SM Liquid PhotoImageable Mask	4.000/0.0195	1.0000
1	Foil Copper Foil		1.4000
-	PP PreReg 1080	4.200/0.0195	1.9500
2	Core FR4 Core	4.200/0.0195	1.4000
3	Core FR4 Core	4.200/0.0195	1.4000
-	PP PreReg 3080	4.200/0.0195	2.7760
-	PP PreReg 1651	4.200/0.0195	5.5520
-	PP PreReg 1651	4.200/0.0195	5.5520
4	Core FR4 Core	4.200/0.0195	1.4000
5	Core FR4 Core	4.200/0.0195	12.0000
			1.4000
-	PP PreReg 1651	4.200/0.0195	5.5520
-	PP PreReg 1651	4.200/0.0195	5.5520
-	PP PreReg 3080	4.200/0.0195	2.7760
6	Core FR4 Core	4.200/0.0195	1.4000
7	Core FR4 Core	4.200/0.0195	3.0000
			1.4000
-	PP PreReg 1080	4.200/0.0195	1.9500
8	Foil Copper Foil		1.4000
-	SM Liquid PhotoImageable Mask	4.000/0.0195	1.0000

Parameter	Value
Substrate 1 Height	H1 3.0000
Substrate 1 Dielectric	Er1 4.2000
Substrate 2 Height	H2 3.3500
Substrate 2 Dielectric	Er2 4.2000
Lower Trace Width	W1 4.0182
Upper Trace Width	W2 3.0182
Trace Thickness	T1 1.4000
<b>Impedance</b>	<b>Zo 49.88</b>
Target Impedance	50.00
Target Tolerance %	10.00

# New Confidential Stamp options added to the technical report

The screenshot shows the Speedstack Report Printer interface. The main window displays a technical report for a PCB stackup. At the top, the word "CONFIDENTIAL" is stamped in red. Below this is a table of the stackup layers, followed by a table of impedance data. A dialog box titled "Confidential Stamp Options" is open, allowing the user to select the location where the stamp should appear. The dialog includes a preview of the stamp and checkboxes for "Location 1", "Location 2", "Location 3", and "Location 4".

Layer	Stack up	Supplier	Description	Type	Processed Thickness	er	Loss Tangent	Impedance ID
1		Polar Samples	Liquid PhotoImageable Mask	SolderMask	1.000	4.000	0.0195	
		Polar Samples	Copper Foil	Copper	1.400			1, 2
		Polar Samples	PrePreg 1050	Dielectric	1.950	4.200	0.0195	
2		Polar Samples	FR4 Core	FR4	1.400			
		Polar Samples	PrePreg 3080	Dielectric	2.775	4.200	0.0195	
		Polar Samples	PrePreg 1651	Dielectric	5.552	4.200	0.0195	
		Polar Samples	PrePreg 1651	Dielectric	5.552	4.200	0.0195	
3		Polar Samples	FR4 Core	FR4	1.400			3
		Polar Samples	PrePreg 1651	Dielectric	5.552	4.200	0.0195	
		Polar Samples	PrePreg 1651	Dielectric	5.552	4.200	0.0195	
		Polar Samples	PrePreg 3080	Dielectric	2.775	4.200	0.0195	
4		Polar Samples	FR4 Core	FR4	3.000	4.200	0.0195	
		Polar Samples	PrePreg 1050	Dielectric	1.400			
		Polar Samples	PrePreg 1050	Dielectric	1.950	4.200	0.0195	
7		Polar Samples	Copper Foil	Copper	1.400			4
8		Polar Samples	Liquid PhotoImageable Mask	SolderMask	1.000	4.000	0.0195	

Impedance ID	Structure Image	Structure Name	Impedance Signal Layer	Ref. Plane 1 in Layer	Ref. Plane 2 in Layer	Lower Trace Width (W1)	Upper Trace Width (W2)	Trace Separation (S1)	Trace Pitch (S1+ W1)	Target Impedance	Calculated Impedance
1		Edge Coupled Coated Microstrip 1B	1	3	0	7.650	6.650	8.115	15.765	100.000	100.290
2		Coated Microstrip 1B	1	3	0	4.000	3.000	0.000	0.000	75.000	75.740
3		Edge Coupled Offset Stripline 1B1A									
4		Coated Microstrip 1B									

The confidential stamps are customisable in terms of the text used and location. This new functionality is available from the technical report Options menu

# Speedstack v22.01.01 (January 2022)


## Snap Parameters and Calculate Structure

Stack Up Editor | DRC : 0 | Controlled Impedance | CI Results

Edge Coupled Coated Microstrip 1B

Substrate 1 Height	H1	6.3500
Substrate 1 Dielectric	Er1	4.2000
Lower Trace Width	W1	7.6500
Upper Trace Width	W2	6.6500
Trace Separation	S1	8.1150
Trace Thickness	T1	1.4000
Coating Above Substrate	C1	1.0000
Coating Above Trace	C2	1.0000
Coating Between Traces	C3	1.0000
Coating Dielectric	CEr	4.0000
Differential Impedance	Zd	100.29
Target Impedance		100.00
Target Tolerance %		10.00

Original parameter values



Stack Up Editor | DRC : 0 | Controlled Impedance | CI Results

Edge Coupled Coated Microstrip 1B


Substrate 1 Height	H1	6.3500
Substrate 1 Dielectric	Er1	4.2000
Lower Trace Width	W1	7.7500
Upper Trace Width	W2	6.7500
Trace Separation	S1	8.0000
Trace Thickness	T1	1.4000
Coating Above Substrate	C1	1.0000
Coating Above Trace	C2	1.0000
Coating Between Traces	C3	1.0000
Coating Dielectric	CEr	4.0000
Differential Impedance	Zd	99.49
Target Impedance		100.00
Target Tolerance %		10.00

Snapped/rounded parameter values

New option

- Snap Parameters and Calculate Structure
1. Snap / round parameters to practical values that are more appropriate for fabrication
  2. The Snap feature supports the following structure parameters : Lower Trace Width (W1), Upper Trace Width (W2), Lower Ground Strip Width (G1), Upper Ground Strip Width (G2), Trace Separation (S1), Ground Strip Separation (D1), Trace Offset (O1)
  3. The Snap To value for each parameter is held in the configuration settings, in this example 0.25 mils.

## Snap Parameters and Calculate Structure

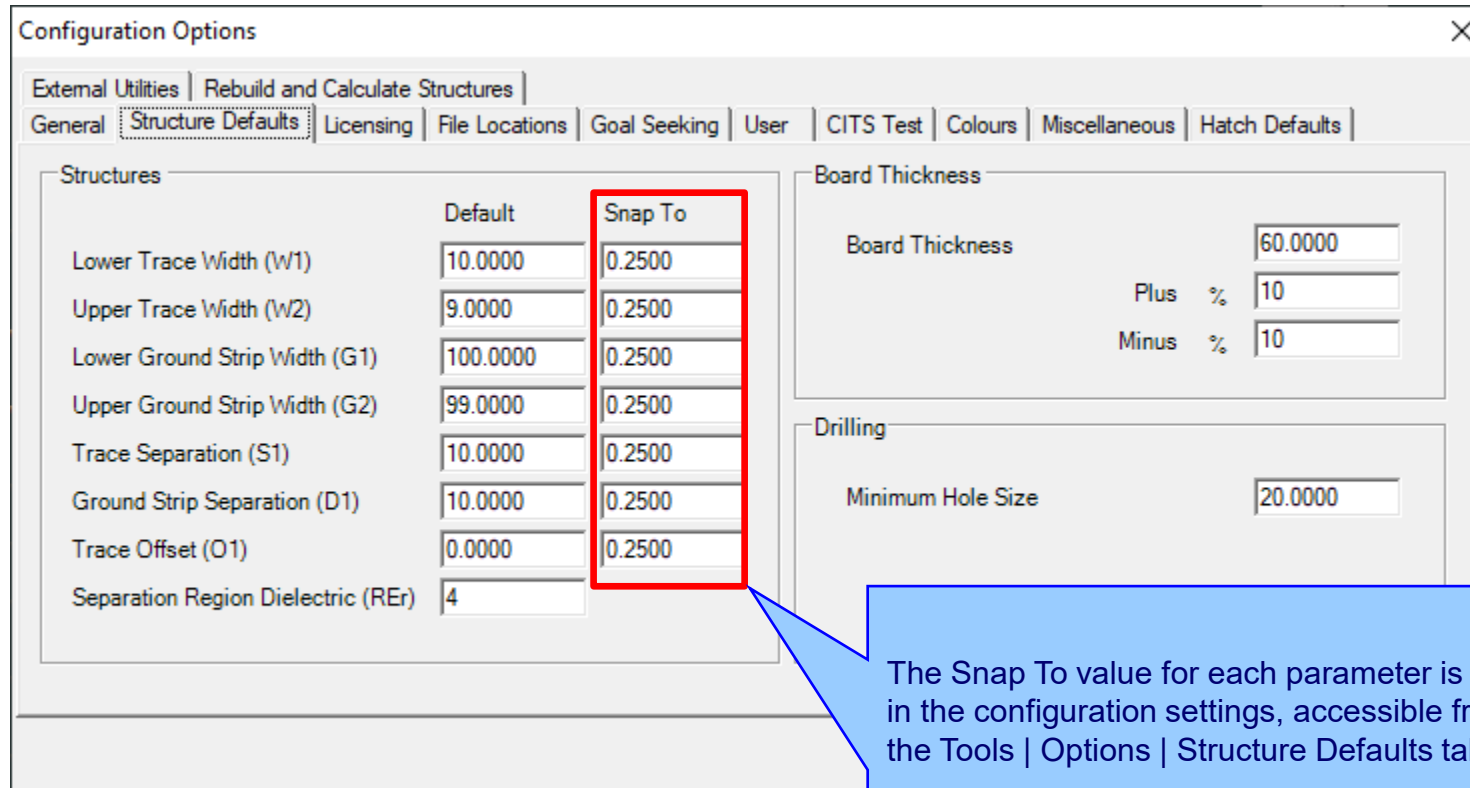

Configuration Options

External Utilities | Rebuild and Calculate Structures |

General | **Structure Defaults** | Licensing | File Locations | Goal Seeking | User | CITS Test | Colours | Miscellaneous | Hatch Defaults |

Structures	Default	Snap To
Lower Trace Width (W1)	10.0000	0.2500
Upper Trace Width (W2)	9.0000	0.2500
Lower Ground Strip Width (G1)	100.0000	0.2500
Upper Ground Strip Width (G2)	99.0000	0.2500
Trace Separation (S1)	10.0000	0.2500
Ground Strip Separation (D1)	10.0000	0.2500
Trace Offset (O1)	0.0000	0.2500
Separation Region Dielectric (REr)	4	

Board Thickness

Board Thickness

Plus %

Minus %


Drilling

Minimum Hole Size

The Snap To value for each parameter is held in the configuration settings, accessible from the Tools | Options | Structure Defaults tab.

Although all Snap To values shown here are set to 0.25 mils, each parameter can support a different value

## Material Library Enhancements

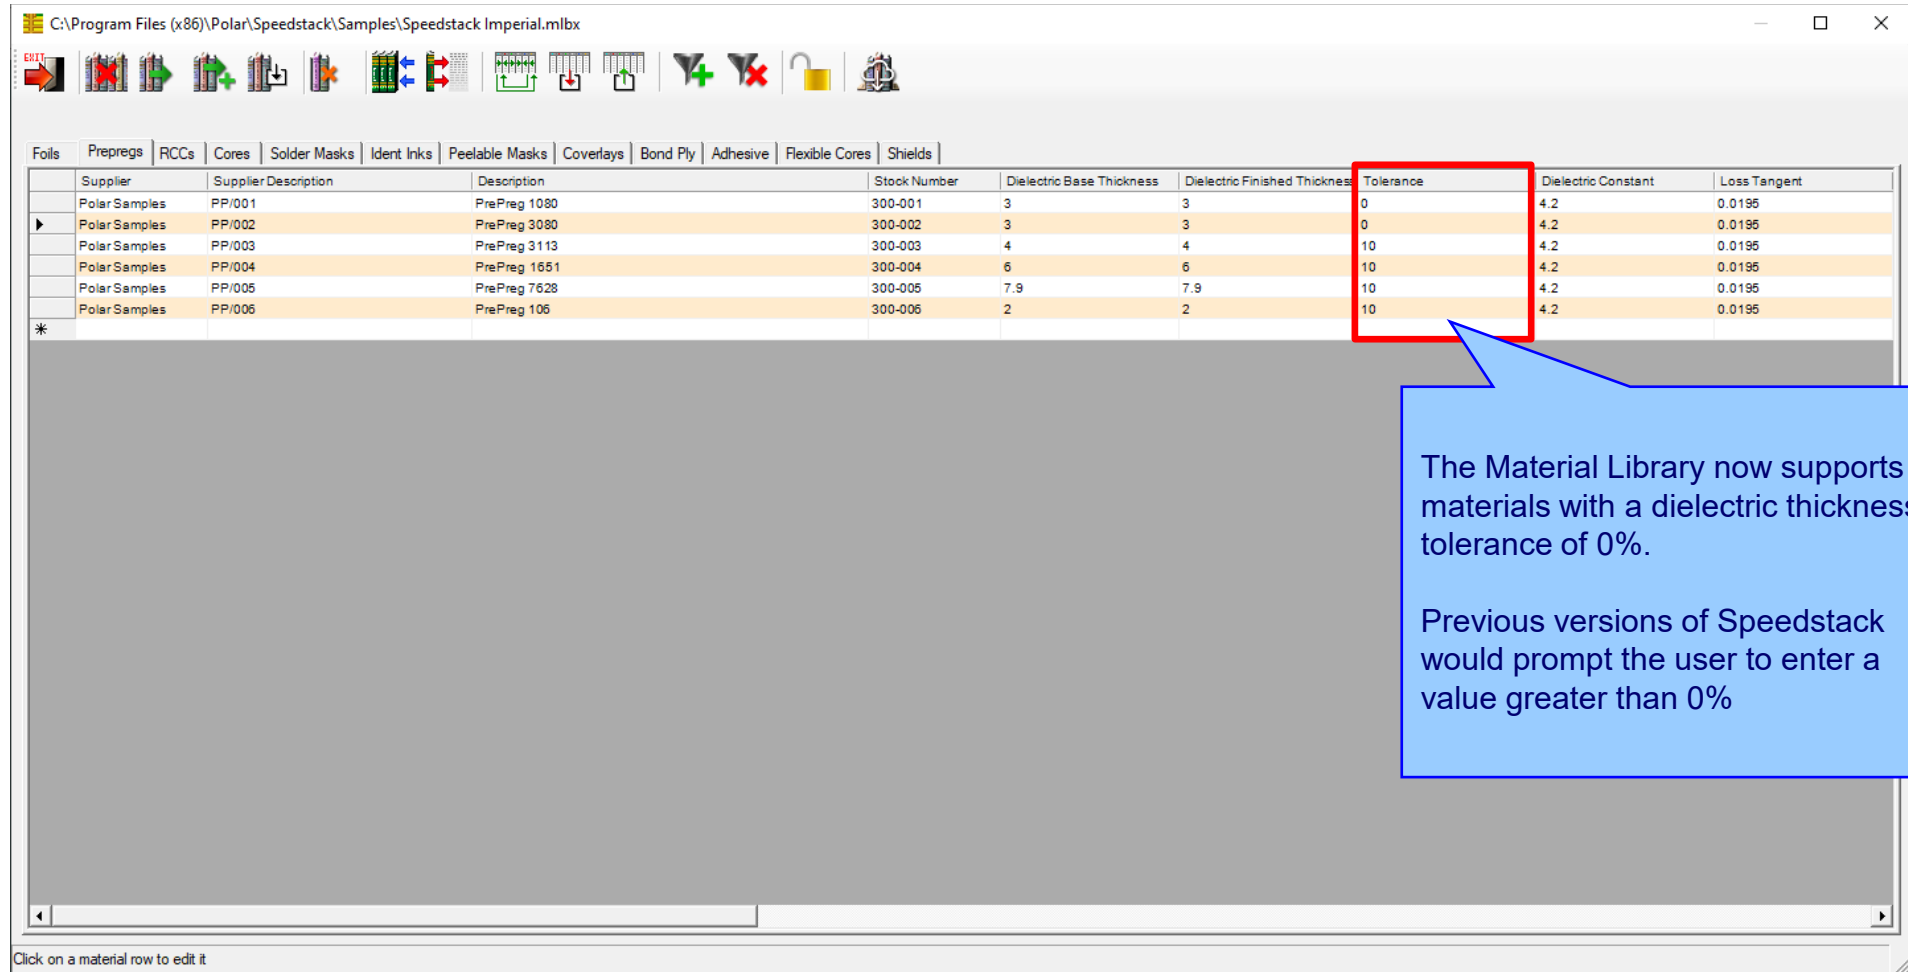

The screenshot shows the Speedstack Material Library interface. The window title is "C:\Program Files (x86)\Polar\Speedstack\Samples\Speedstack Imperial.mlbx". The interface includes a toolbar with various icons and a tabbed menu with categories: Foils, Prepregs, RCCs, Cores, Solder Masks, Ident Inks, Peelable Masks, Coverlays, Bond Ply, Adhesive, Flexible Cores, and Shields. The main area displays a table of materials with the following columns: Supplier, Supplier Description, Description, Stock Number, Dielectric Base Thickness, Dielectric Finished Thickness, Tolerance, Dielectric Constant, and Loss Tangent. A red box highlights the 'Tolerance' column, and a blue callout box points to it with the following text:

The Material Library now supports materials with a dielectric thickness tolerance of 0%.

Previous versions of Speedstack would prompt the user to enter a value greater than 0%


At the bottom of the window, there is a note: "Click on a material row to edit it".

Supplier	Supplier Description	Description	Stock Number	Dielectric Base Thickness	Dielectric Finished Thickness	Tolerance	Dielectric Constant	Loss Tangent
Polar Samples	PP/001	PrePreg 1080	300-001	3	3	0	4.2	0.0195
Polar Samples	PP/002	PrePreg 3080	300-002	3	3	0	4.2	0.0195
Polar Samples	PP/003	PrePreg 3113	300-003	4	4	10	4.2	0.0195
Polar Samples	PP/004	PrePreg 1651	300-004	6	6	10	4.2	0.0195
Polar Samples	PP/005	PrePreg 7628	300-005	7.9	7.9	10	4.2	0.0195
Polar Samples	PP/006	PrePreg 106	300-006	2	2	10	4.2	0.0195



# Speedstack v21.11.01 (November 2021)

## Material Note Field Enhancements – improvements to stack up documentation

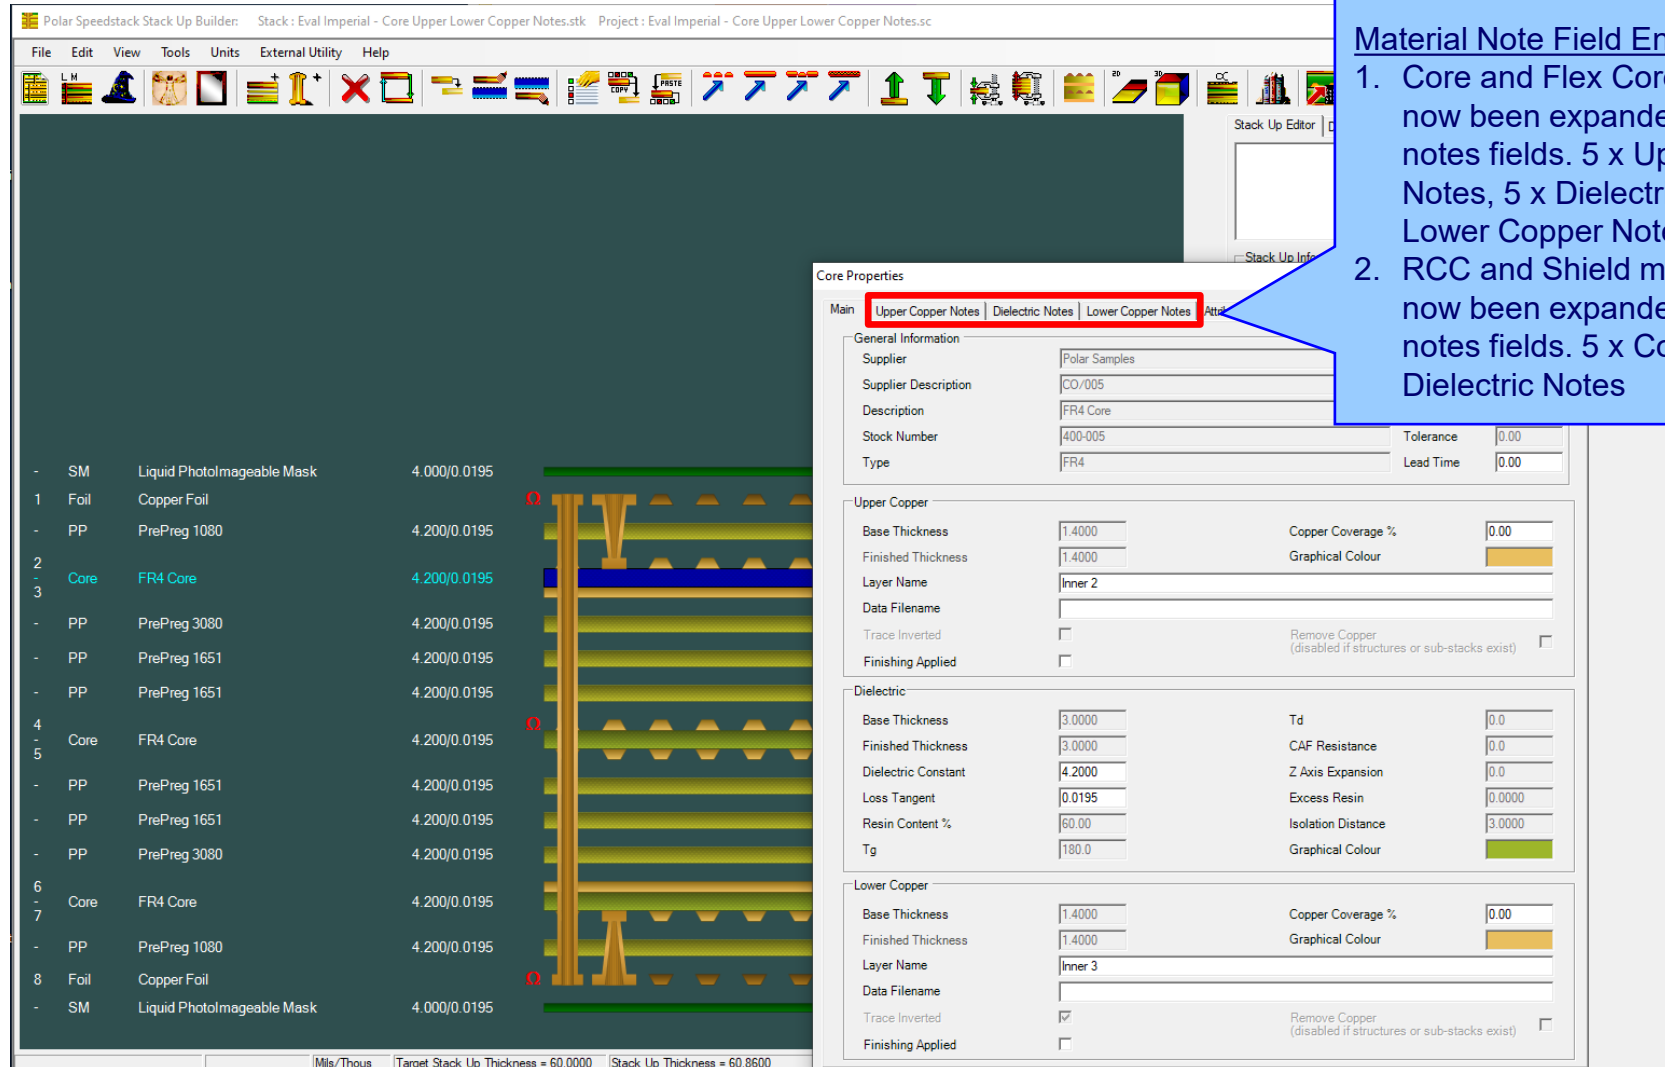


The screenshot shows the Polar Speedstack Stack Up Builder interface. On the left, a list of layers is displayed with their descriptions and thicknesses. The main area shows a 3D cross-section of the stackup. A 'Core Properties' dialog box is open, showing tabs for 'Upper Copper Notes', 'Dielectric Notes', and 'Lower Copper Notes'. The 'Upper Copper Notes' tab is selected and highlighted with a red box. The dialog box contains various fields for material properties, including General Information, Upper Copper, Dielectric, and Lower Copper sections.

Layer	Description	Thickness
SM	Liquid Photolmageable Mask	4.000/0.0195
1	Foil Copper Foil	
PP	PrePreg 1080	4.200/0.0195
2	Core FR4 Core	4.200/0.0195
3		
PP	PrePreg 3080	4.200/0.0195
PP	PrePreg 1651	4.200/0.0195
PP	PrePreg 1651	4.200/0.0195
4		
5	Core FR4 Core	4.200/0.0195
PP	PrePreg 1651	4.200/0.0195
PP	PrePreg 1651	4.200/0.0195
PP	PrePreg 3080	4.200/0.0195
6		
7	Core FR4 Core	4.200/0.0195
PP	PrePreg 1080	4.200/0.0195
8	Foil Copper Foil	
SM	Liquid Photolmageable Mask	4.000/0.0195

- Material Note Field Enhancements**
1. Core and Flex Core materials have now been expanded to support 15 notes fields. 5 x Upper Copper Notes, 5 x Dielectric Notes, 5 x Lower Copper Notes
  2. RCC and Shield materials have now been expanded to support 10 notes fields. 5 x Copper Notes, 5 x Dielectric Notes

## Material Note Field Enhancements – improvements to stack up documentation

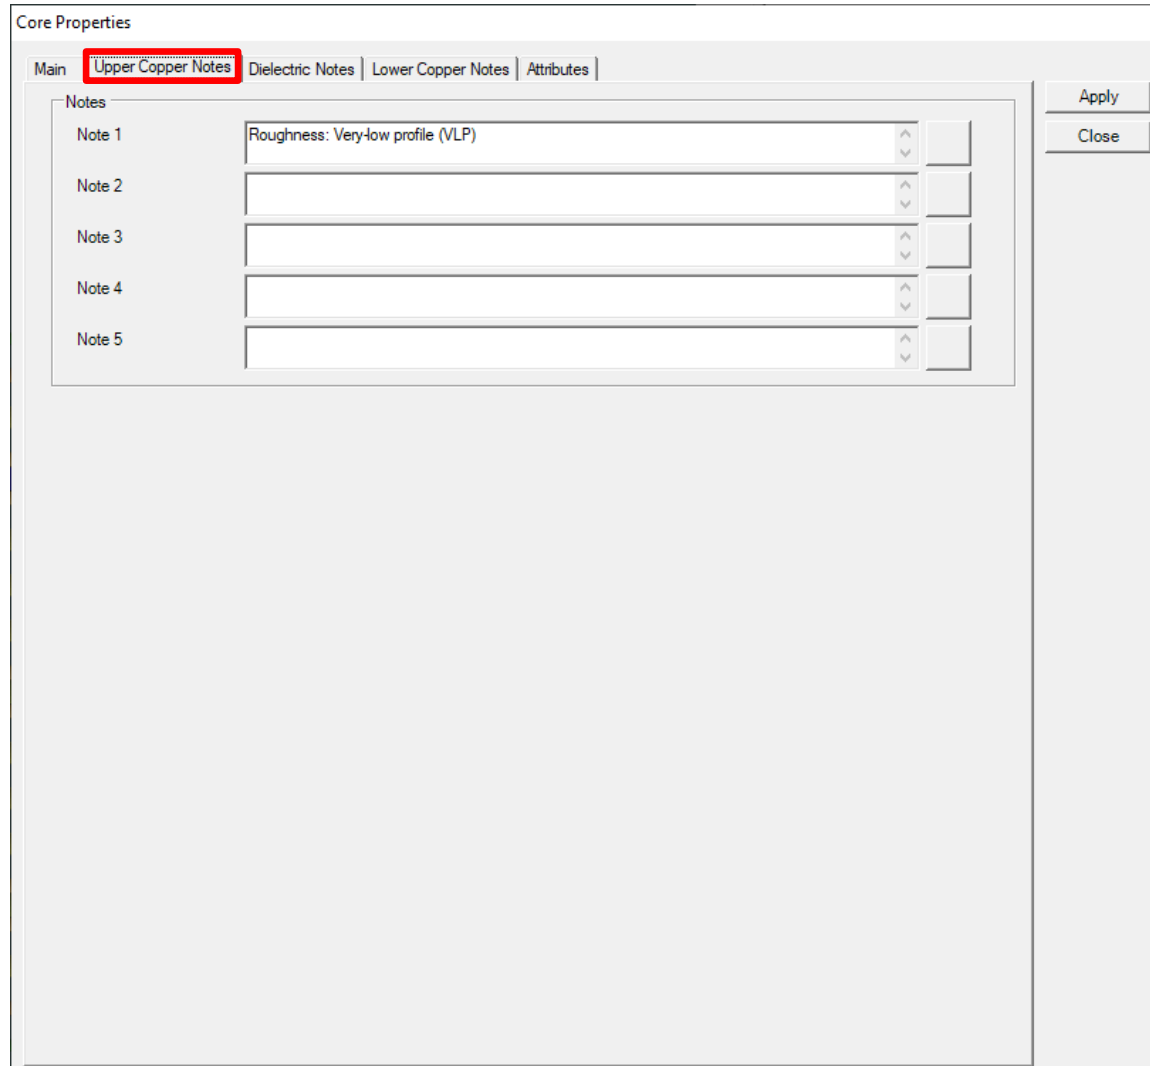

Core Properties

Main | **Upper Copper Notes** | Dielectric Notes | Lower Copper Notes | Attributes

Notes

Note 1	Roughness: Very-low profile (VLP)	^	v
Note 2		^	v
Note 3		^	v
Note 4		^	v
Note 5		^	v


Apply

Close

The new Upper and Lower Copper Notes allow the user to specify important information about the copper surfaces for a Core and Flex Core material.

For instance, copper roughness and plating fabrication information can be specified

## Material Note Field Enhancements – improvements to stack up documentation

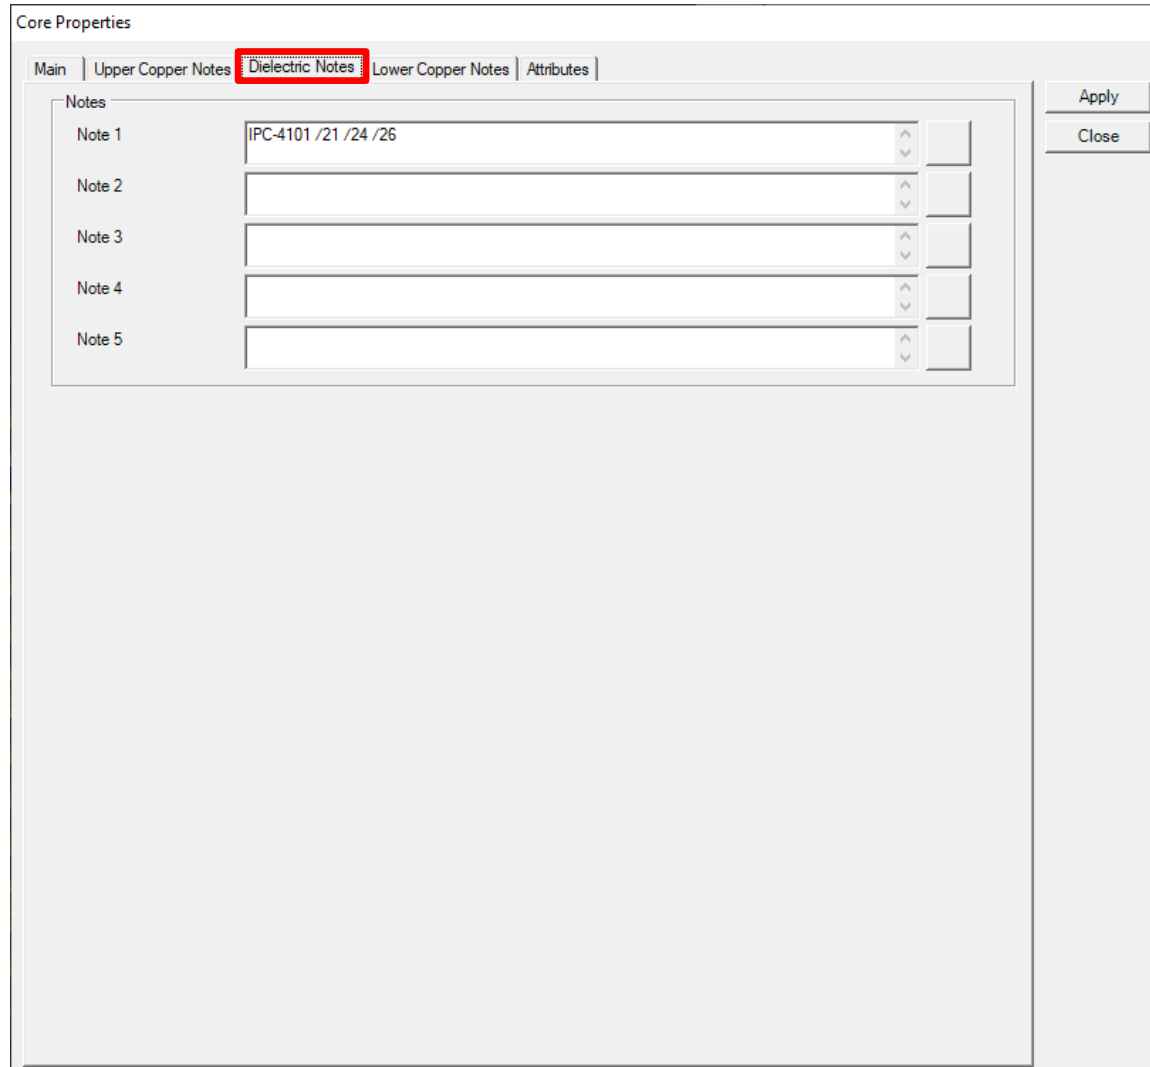

Core Properties

Main | Upper Copper Notes | **Dielectric Notes** | Lower Copper Notes | Attributes

Notes

Note 1	IPC-4101 /21 /24 /26	^	v
Note 2		^	v
Note 3		^	v
Note 4		^	v
Note 5		^	v


Apply

Close

Dielectric Notes are useful for specifying IPC-4101 slash sheet categories, glass weave information (spread glass) and other important information regarding the dielectric region of the core.

The existing five Notes fields from previous versions of Speedstack will be allocated as Dielectric Notes.

## Material Note Field Enhancements – improvements to stack up documentation

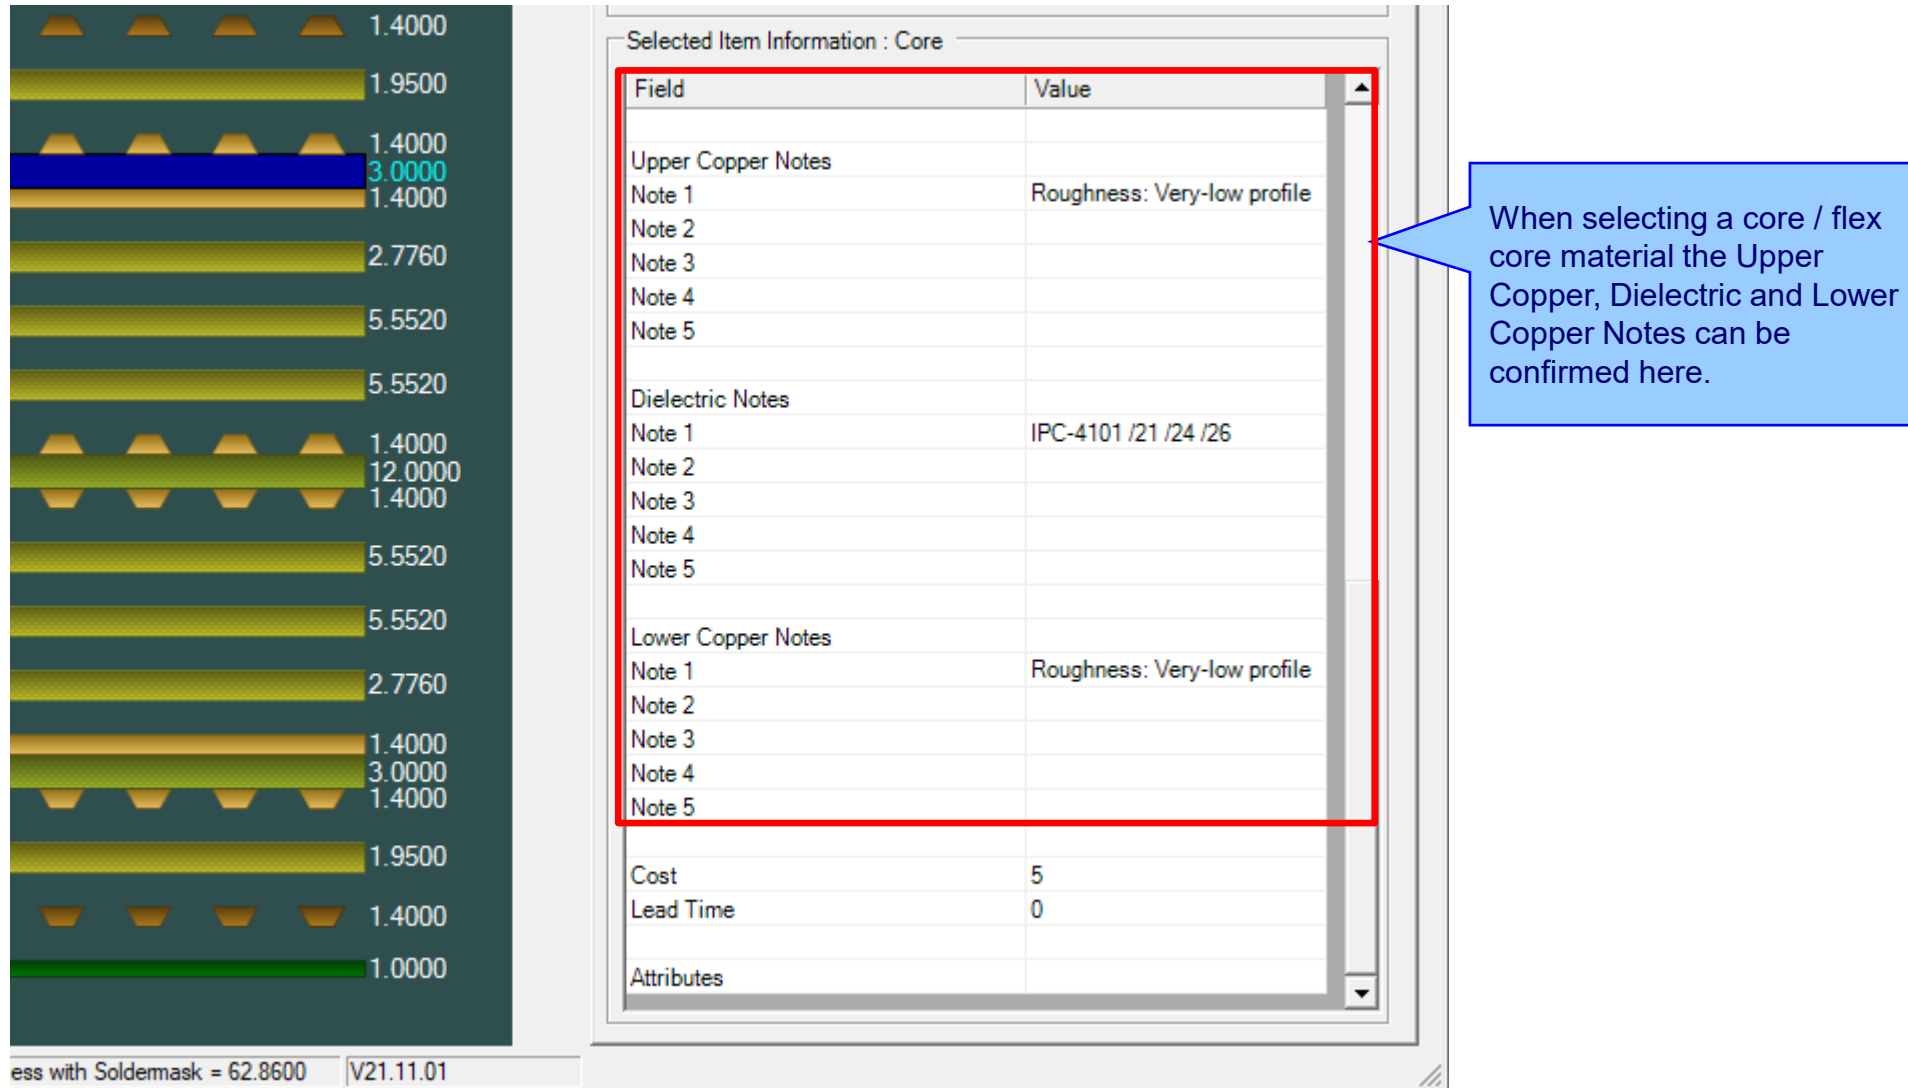

Selected Item Information : Core

Field	Value
Upper Copper Notes	
Note 1	Roughness: Very-low profile
Note 2	
Note 3	
Note 4	
Note 5	
Dielectric Notes	
Note 1	IPC-4101 /21 /24 /26
Note 2	
Note 3	
Note 4	
Note 5	
Lower Copper Notes	
Note 1	Roughness: Very-low profile
Note 2	
Note 3	
Note 4	
Note 5	
Cost	5
Lead Time	0
Attributes	

When selecting a core / flex core material the Upper Copper, Dielectric and Lower Copper Notes can be confirmed here.

ess with Soldermask = 62.8600 | V21.11.01

## Material Note Field Enhancements – library enhancements

Review/Edit Cores

Supplier	Polar Samples
Supplier Description	CO/005
Description	FR4 Core
Stock Number	400-005
Type	FR4
Base Thickness	3.0000
Finished Thickness	3.0000
Dielectric Constant	4.2
Loss Tangent	0.0195
Resin Content	60
Tg	180
Td	0
CAF Resistance	0
Z Axis Expansion	0
Tolerance +/-%	10
Upper Cu Thickness	1.4000
Lower Cu Thickness	1.4000
Cost	5
Lead Time	0
Size	*
Use in Auto Stack	<input checked="" type="checkbox"/>
Planes Both Sides	<input type="checkbox"/>
Laser Drillable	<input checked="" type="checkbox"/>


Upper Copper Notes		Dielectric Notes		Lower Copper Notes	
Note 1	Roughness: Very-low profile (VLP)	Note 1	IPC-4101 /21 /24 /26	Note 1	Roughness: Very-low profile (VLP)
Note 2		Note 2		Note 2	
Note 3		Note 3		Note 3	
Note 4		Note 4		Note 4	
Note 5		Note 5		Note 5	

<< < 5 of 27 > >>


The Speedstack material library has been enhanced to support the extra notes fields.

Notes added to the materials in the library will automatically be transferred to the stack up.

## Material Note Field Enhancements – library enhancements

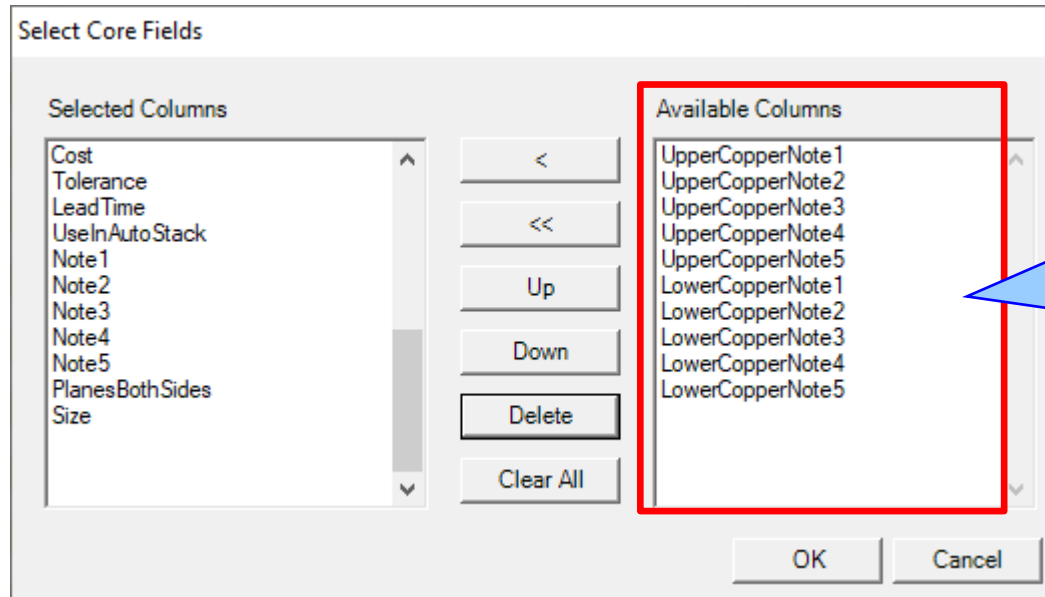

For existing Speedstack users upgrading to v21.11, use the Select and Arrange Columns and Save Column Order toolbar options to add these new material library columns to the Data Grid view




### Material Library Import / Export

The import / export options have been enhanced to support the additional material library notes columns.



## Material Note Field Enhancements – technical report enhancements

C:\Apps\Samples\Eval Imperial - Core Upper Lower Copper Notes.sci      Units: Mils

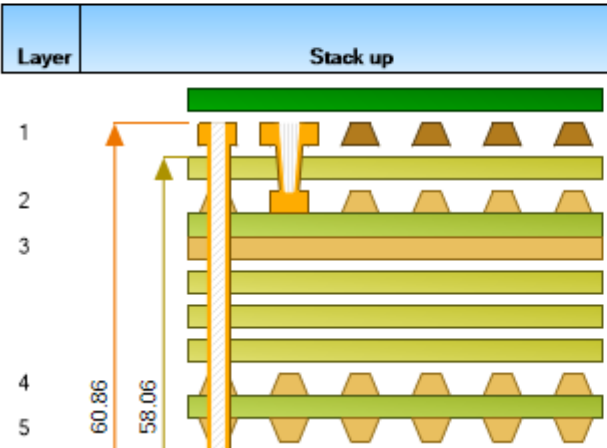Layer	Stack up	Manufacturing Notes	Copper Layer Name	Supplier	Description
1				Polar Samples	Liquid PhotoImageable Mask
			Top	Polar Samples	Copper Foil
2		Roughness: Very-low profile (VLP) IPC-4101 /21 /24 /26	Inner 2	Polar Samples	PrePreg 1080
3		Roughness: Very-low profile (VLP)	Inner 3	Polar Samples	FR4 Core
				Polar Samples	PrePreg 3080
4				Polar Samples	PrePreg 1651
5				Polar Samples	PrePreg 1651

The technical report has been updated to support the additional notes fields. Notice the Upper Copper, Dielectric and Lower Copper Notes align with the appropriate part of the Core material.



## Import / Export enhancements

The following Import / Export options have been updated to support the additional material notes properties introduced with Speedstack v21.11.01:

- XML STKX v23.00 and SSX v13.00 import / export options
- CSV export option

# Speedstack v21.07.08 (July 2021)

## New Drill Cap feature


The screenshot shows the Polar Speedstack Stack Up Builder interface. The main window displays a stack up configuration with 13 layers. A red box highlights a specific layer configuration for a drill cap. The right-hand panel shows a cross-sectional diagram of a 'Coated Microstrip 18' with various parameters defined in a table below it.

Parameter	Value
Substrate 1 Height	H1 13.2250
Substrate 1 Dielectric	Er1 4.2000
Lower Trace Width	W1 10.1563
Upper Trace Width	W2 9.1563
Trace Thickness	T1 1.4000
Coating Above Substrate	C1 1.0000
Coating Above Trace	C2 1.0000

The new Drill Cap feature has been introduced to clearly document when via holes are capped, the process where a conductive 'lid' is added to the via hole during fabrication.

Buried vias, plated holes that start and end on inner layers of a stack up, are often capped.

## Drill Cap option – mechanical through plated drills

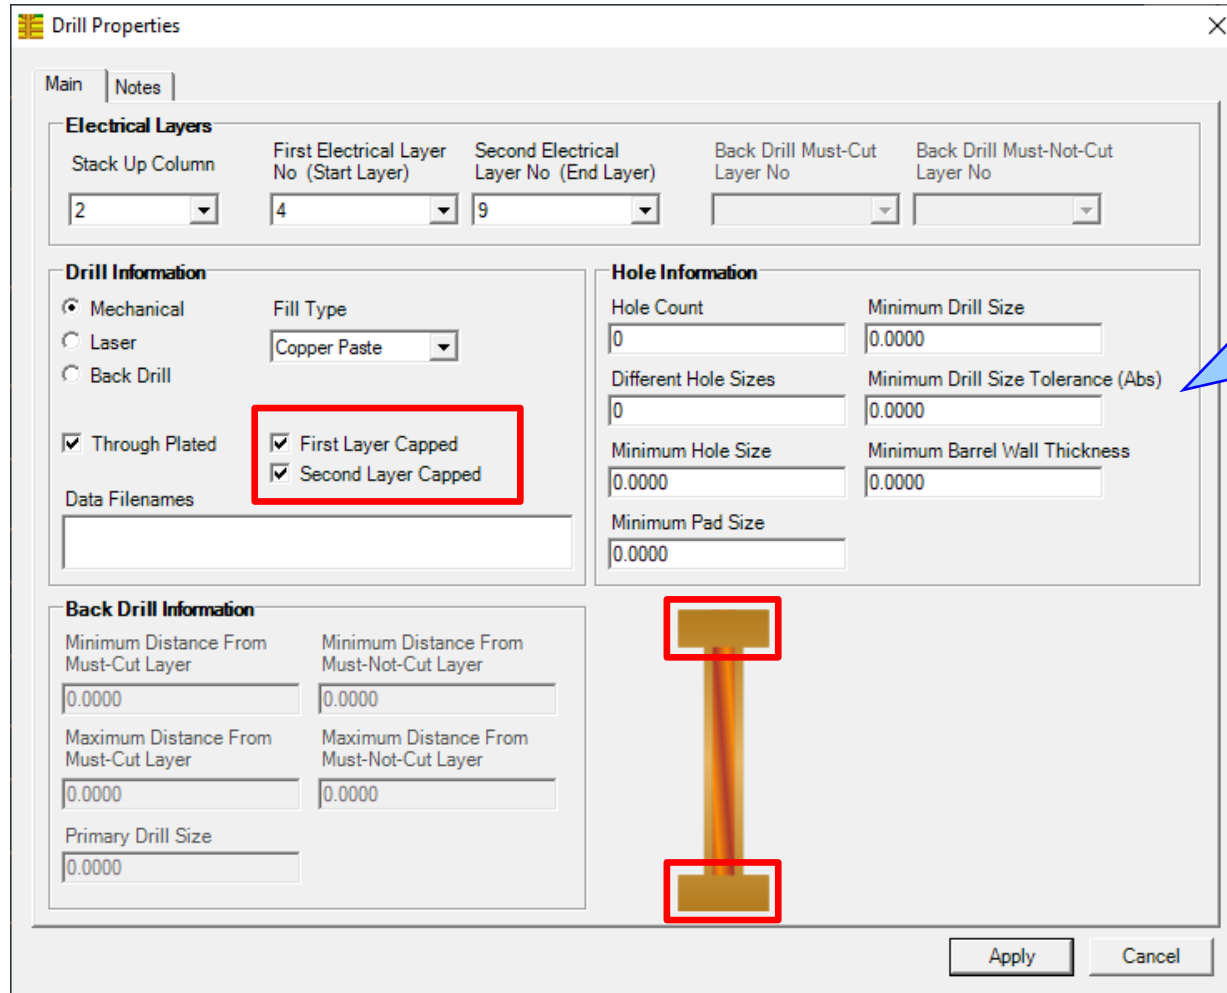

The screenshot shows the 'Drill Properties' dialog box with the following settings:

- Electrical Layers:** Stack Up Column: 2, First Electrical Layer No (Start Layer): 4, Second Electrical Layer No (End Layer): 9.
- Drill Information:** Mechanical (selected), Fill Type: Copper Paste, Through Plated (checked), First Layer Capped (checked), Second Layer Capped (checked).
- Hole Information:** Hole Count: 0, Minimum Drill Size: 0.0000, Different Hole Sizes: 0, Minimum Drill Size Tolerance (Abs): 0.0000, Minimum Hole Size: 0.0000, Minimum Barrel Wall Thickness: 0.0000, Minimum Pad Size: 0.0000.
- Back Drill Information:** Minimum Distance From Must-Cut Layer: 0.0000, Minimum Distance From Must-Not-Cut Layer: 0.0000, Maximum Distance From Must-Cut Layer: 0.0000, Maximum Distance From Must-Not-Cut Layer: 0.0000, Primary Drill Size: 0.0000.


A red box highlights the 'First Layer Capped' and 'Second Layer Capped' checkboxes. A blue callout box points to the 'Through Plated' section.

### Mechanical

For mechanical drills it is possible to have four states:

1. Neither first or second layer capped (default when adding a drill)
2. First layer capped
3. Second layer capped
4. Both layers capped

## Drill Cap option – laser drills

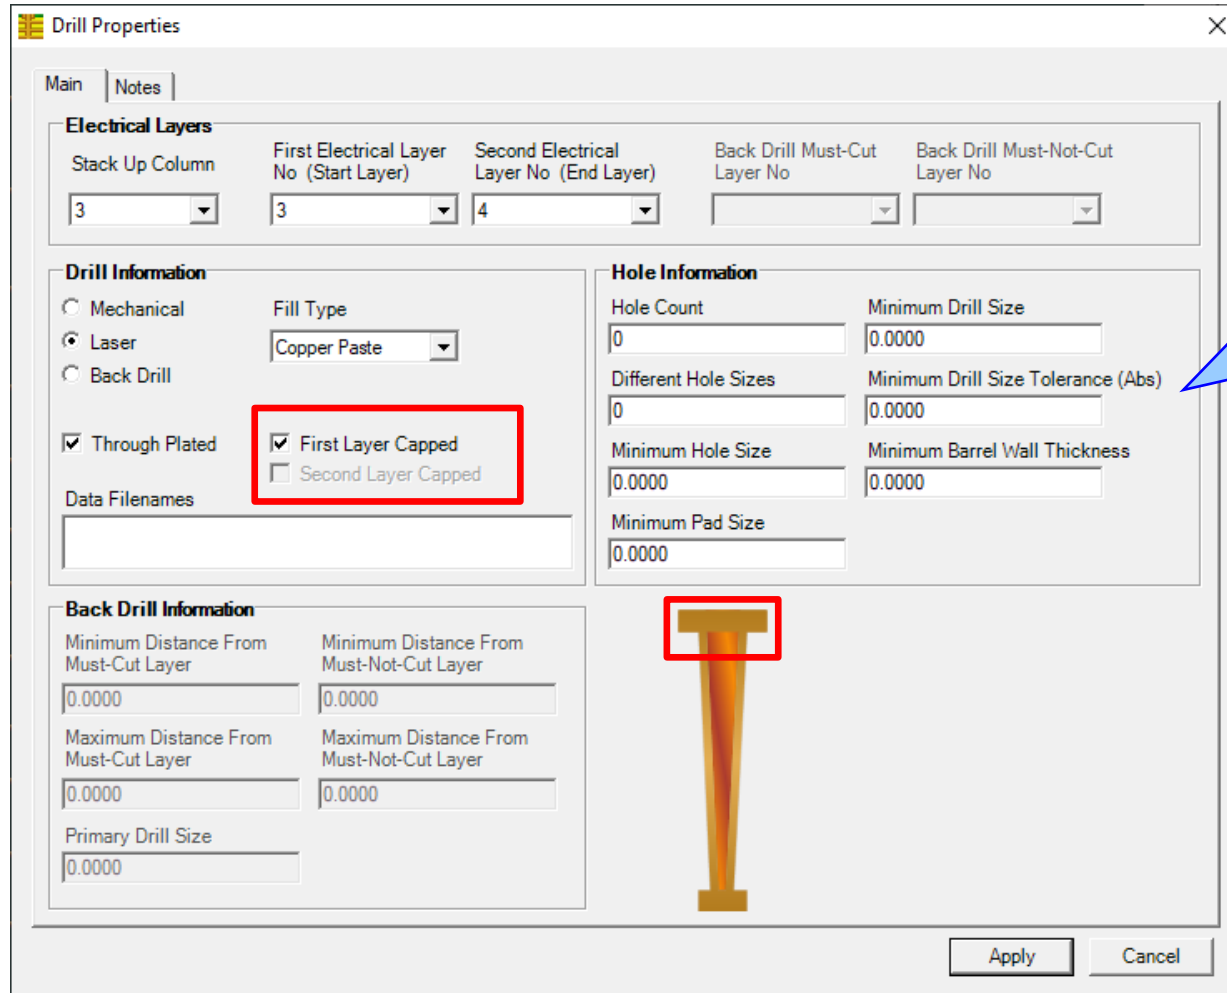

Drill Properties

Main | Notes

**Electrical Layers**

Stack Up Column	First Electrical Layer No (Start Layer)	Second Electrical Layer No (End Layer)	Back Drill Must-Cut Layer No	Back Drill Must-Not-Cut Layer No
3	3	4		

**Drill Information**

Mechanical  Laser  Back Drill

Fill Type: Copper Paste

Through Plated

First Layer Capped  
 Second Layer Capped

Data Filenames: [ ]

**Back Drill Information**

Minimum Distance From Must-Cut Layer	Minimum Distance From Must-Not-Cut Layer
0.0000	0.0000
Maximum Distance From Must-Cut Layer	Maximum Distance From Must-Not-Cut Layer
0.0000	0.0000

Primary Drill Size: 0.0000

Hole Information

Hole Count	Minimum Drill Size
0	0.0000
Different Hole Sizes	Minimum Drill Size Tolerance (Abs)
0	0.0000
Minimum Hole Size	Minimum Barrel Wall Thickness
0.0000	0.0000
Minimum Pad Size	
0.0000	

Apply Cancel

### Laser

For laser drills it is possible to have two states as the Second Layer Capped checkbox is disabled:

1. Not capped (default when adding a drill)
2. First layer capped

## New Drill Cap feature

Stack Up Editor | DRC : 0 | Controlled Impedance | CI Results

Field	Value
Electrical Layer Count	12
Stack Up Cost	46.00
Copper Thickness	19.6000
Dielectric Thickness	37.3600
Solder Mask Thickness	2.0000
-----	-----
Target Stack Up Thickness	60.0000
Stack Up Thickness	56.9600
Stack Up Thickness with Soldermask	58.9600
-----	-----

Field	Value
First Electrical Layer No	4
Second Electrical Layer No	9
Mechanical Drill	True
Laser Drill	False
Back Drill	False
Through Plated	True
First Layer Capped	True
Second Layer Capped	True
Fill Type	Copper Paste
Data Filenames	
Hole Count	
Different Hole Sizes	0
Minimum Hole Size	0
Minimum Allowable Hole S	
Minimum Pad Size	
Minimum Drill Size	
Minimum Drill Size Toler	
Minimum Barrel Wall Thic	
Note 1	
Note 2	
Note 3	
Note 4	
Note 5	

Mils/Thous | Target Stack Up Thickness = 60.0000 | Stack Up Thickness = 56.9600 | Stack Up Thickness with Soldermask = 58.9600 | Beta V21.07.08

# New Drill Cap feature – technical report enhancements

Speedstack Report Printer

File Options

C:\Apps\Samples\Eval Imperial Capped Drills.sci Units: Mils

Layer	Stack up	Copper Layer Name	Supplier	Description	Type	Processed Thickness	$\epsilon_r$	Loss Tangent	Impedance ID	
1		Top	Polar Samples	Liquid Photolimageable Mask	SolderMask	1.000	4.000	0.0195		
2			Polar Samples	Copper Foil	Copper	1.400			1, 2	
		Inner 2	Polar Samples	PrePreg 1080	Dielectric	1.950	4.200	0.0195		
		Inner 3	Polar Samples	Copper Foil	Copper	1.400				
		Inner 4	Polar Samples	PrePreg 1080	Dielectric	1.950	4.200	0.0195		
		Inner 5	Polar Samples	Copper Foil	Copper	1.400				
		Inner 6	Polar Samples	PrePreg 1080	Dielectric	1.425	4.200	0.0195		
		Inner 7	Polar Samples	FR4 Core	FR4	2.100	3.000	4.200	0.0195	
		Inner 8	Polar Samples	PrePreg 1080	Dielectric	1.400	2.178	4.200	0.0195	
		Inner 9	Polar Samples	PrePreg 1080	Dielectric	2.178	4.200	0.0195		
		Inner 10	Polar Samples	FR4 Core	FR4	2.100	12.000	4.200	0.0195	3, 4
		Inner 11	Polar Samples	PrePreg 1080	Dielectric	2.100	2.178	4.200	0.0195	5, 6
		Inner 12	Polar Samples	PrePreg 1080	Dielectric	2.178	4.200	0.0195		
12		Bottom	Polar Samples	Copper Foil	Copper	1.400			7, 8	

geable Mask SolderMask 1.000 4.000 0.0195  
 = 37.360 | Solder Mask Thickness = 2.000 | Stack Up Thickness = 56.960 | Stack Up Thickness with Soldermask = 58.960

The technical report has also been updated to support capped drills

## Import / Export enhancements

The following Import / Export options have been updated to support the drill cap properties introduced with Speedstack v21.07.08:

- XML STKX v22.00 and SSX v12.00 import / export options
- CSV export option



# Speedstack v21.05.06 (May 2021)

## New Layer Name property for electrical / copper layers

The screenshot shows the Polar Speedstack Stack Up Builder interface. On the left, a list of layers is displayed with their names, materials, and thicknesses. A 3D stack of layers is shown in the center, with a red box highlighting the electrical/copper layers (Inner 2 through Inner 7). On the right, a cross-section diagram of an edge-coupled microstrip is shown with various parameters labeled (C1, C2, C3, S1, W1, W2, T1, H1, Er1). Below the diagram is a table of parameters:

Substrate 1 Height	H1	6.3500
Substrate 1 Dielectric	Er1	4.2000
Lower Trace Width	W1	7.6500
Upper Trace Width	W2	6.6500
Trace Separation	S1	8.1150
Trace Thickness	T1	1.4000
Coating Above Substrate	C1	1.0000

A new Layer Name property has been introduced to the electrical / copper layer element of Foils, Cores, Flex Cores, RCCs and Shields

Speedstack will continue to use the automatic layer numbers but this new text field allows users to key in their own descriptions to match existing layer naming conventions

## New Layer Name property for electrical / copper layers

Foil Properties


Main | Notes | Attributes

Apply

General Information

Supplier	Polar Samples	Cost	1.00
Supplier Description	FO/001	Lead Time	0.00
Description	Copper Foil		
Stock Number	100-001		
Type	Copper		

Copper

Base Thickness	0.7000	Copper Coverage %	0.00
Finished Thickness	1.4000	Graphical Colour	
Layer Name	Top		
Data Filename			
Trace Inverted	<input type="checkbox"/>	Remove Copper (disabled if structures or sub-stacks exist)	<input type="checkbox"/>
Finishing Applied	<input type="checkbox"/>		

### Foil Properties

The new Layer Name property exists on all materials with an electrical / copper layer. The user can key in any alphanumeric name

## New Layer Name property for electrical / copper layers


Core Properties

Main | Notes | Attributes


General Information

Supplier	Polar Samples	Exchange Copper	<input type="checkbox"/>
Supplier Description	CO/005		
Description	FR4 Core	Cost	5.00
Stock Number	400-005	Tolerance	0.00
Type	FR4	Lead Time	0.00


Upper Copper

Base Thickness	1.4000	Copper Coverage %	0.00
Finished Thickness	1.4000	Graphical Colour	
Layer Name	Inner 2		
Data Filename			
Trace Inverted	<input type="checkbox"/>	Remove Copper (disabled if structures or sub-stacks exist)	<input type="checkbox"/>
Finishing Applied	<input type="checkbox"/>		

Dielectric

Base Thickness	3.0000	Td	0.0
Finished Thickness	3.0000	CAF Resistance	0.0
Dielectric Constant	4.2000	Z Axis Expansion	0.0
Loss Tangent	0.0195	Excess Resin	0.0000
Resin Content %	60.00	Isolation Distance	3.0000
Tg	180.0	Graphical Colour	

Lower Copper

Base Thickness	1.4000	Copper Coverage %	0.00
Finished Thickness	1.4000	Graphical Colour	
Layer Name	Inner 3		
Data Filename			
Trace Inverted	<input checked="" type="checkbox"/>	Remove Copper (disabled if structures or sub-stacks exist)	<input type="checkbox"/>
Finishing Applied	<input type="checkbox"/>		

Apply

Close

### Core Properties

For core materials, a new Layer Name property has been added for both upper and lower electrical / copper layers

## New Layer Name property for electrical / copper layers

The screenshot shows the Polar Speedstack Stack Up Builder interface. The main window displays a stack of materials with a 3D cross-section view. The materials list on the left includes:

- SM: Liquid Photolmageable Mask (4.000/0.0195, 1.0000)
- 1 Foil: Copper Foil (4.200/0.0195, 1.4000)
- PP: PrePreg 1080 (4.200/0.0195, 1.9500)
- 2 Core: FR4 Core (4.200/0.0195, 1.4000)
- 3 Core: FR4 Core (4.200/0.0195, 3.0000)
- Core: FR4 Core (4.200/0.0195, 1.4000)
- PP: PrePreg 3080 (4.200/0.0195, 2.7760)
- PP: PrePreg 1651 (4.200/0.0195, 5.5520)
- PP: PrePreg 1651 (4.200/0.0195, 5.5520)
- 4 Core: FR4 Core (4.200/0.0195, 1.4000)
- 5 Core: FR4 Core (4.200/0.0195, 12.0000)
- Core: FR4 Core (4.200/0.0195, 1.4000)
- PP: PrePreg 1651 (4.200/0.0195, 5.5520)
- PP: PrePreg 1651 (4.200/0.0195, 5.5520)
- PP: PrePreg 3080 (4.200/0.0195, 2.7760)
- 6 Core: FR4 Core (4.200/0.0195, 1.4000)
- 7 Core: FR4 Core (4.200/0.0195, 3.0000)
- Core: FR4 Core (4.200/0.0195, 1.4000)
- PP: PrePreg 1080 (4.200/0.0195, 1.9500)
- 8 Foil: Copper Foil (4.200/0.0195, 1.4000)
- SM: Liquid Photolmageable Mask (4.000/0.0195, 1.0000)

The right-hand panel shows the 'Stack Up Information' and 'Selected Item Information' for the selected 'Foil' layer:


Field	Value
Electrical Layer Count	8
Stack Up Cost	54.00
Copper Thickness	11.2000
Dielectric Thickness	49.6600
Solder Mask Thickness	2.0000
=====	
Target Stack Up Thickness	60.0000
Stack Up Thickness	60.8600
Stack Up Thickness with Soldermask	62.8600
=====	

Field	Value
Supplier	Polar Samples
Supplier Description	FO.001
Description	Copper Foil
Stock Number	100-001
Type	Copper
-----	
Cu Base Thickness	0.7000
Cu Finished Thickness	1.4000
Copper Coverage	0
Layer Name	Top
Data Filenames	
Minimum Trace Width	2.9528
-----	
Note 1	
Note 2	
Note 3	
Note 4	
Note 5	
Cost	
Lead Time	
-----	
Attributes	

The 'Layer Name' field in the 'Selected Item Information' table is highlighted with a red box, and a blue callout box points to it with the text: "The Selected Item Information auto updates as you click each material, the Layer Name can be confirmed here".

## New Layer Name property for electrical / copper layers

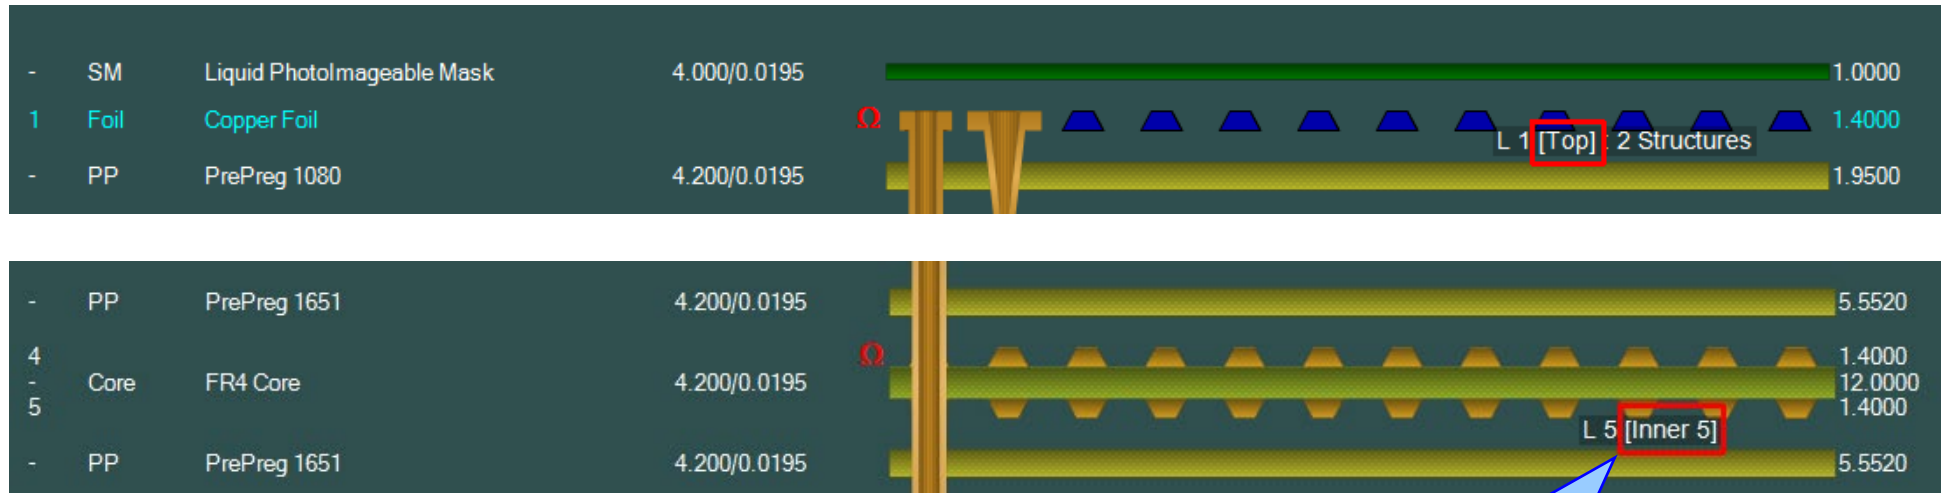

Mouse over the electrical layer and the Layer Name will display alongside the layer number and the amount of structures. Very quickly confirm the Layer Name without needing to open the Properties dialog

## New Layer Name property for electrical / copper layers

The screenshot displays a PCB stack up configuration interface. On the left, a table lists the layers:

-	SM	Liquid PhotoImageable Mask	4.000/0.0195
1	Fail	Copper Fail	
-	PP	PrePreg 1080	4.200/0.0195
2	Core	FR4 Core	4.200/0.0195
3	-	-	-
-	PP	PrePreg 30	
-	PP	PrePreg 16	
-	PP	PrePreg 16	
4	-	-	-

The central part of the image shows a 3D cross-section of the stack up with layers labeled: Top, Inner 2, Inner 3, Inner 4, Inner 5, Inner 6, Inner 7, and Bottom. A red box highlights these labels. A blue callout bubble points to the configuration options dialog box with the text: "Customise the Display Fields to show the layer name next to the stack up graphic".

The Configuration Options dialog box is open, showing the "Miscellaneous" tab. Under "Display Data", the "Display Fields 1 and 2 are reserved for Layer Numbers and Layer Types". The "Display Field 5" dropdown menu is open, showing a list of properties, with "Layer Name" selected and highlighted by a red box.

## New Layer Name property for electrical / copper layers

Speedstack Report Printer

File Options

C:\Mpsst\Samples\Eval Imperial.sci Units: Mils

Layer	Stack up	Copper Layer Name	Supplier	Description	Type	Processed Thickness	εr	Loss Tangent	Impedance ID
1	Top		Polar Samples	Liquid PhotoImageable Mask	SolderMask	1.000	4.000	0.0195	
			Polar Samples	Copper Foil	Copper	1.400			1, 2
2	Inner 2		Polar Samples	PrePreg 1080	Dielectric	1.950	4.200	0.0195	
3	Inner 3		Polar Samples	FR4 Core	FR4	3.000	4.200	0.0195	
			Polar Samples	PrePreg 3080	Dielectric	1.400			
			Polar Samples	PrePreg 1651	Dielectric	5.552	4.200	0.0195	
			Polar Samples	PrePreg 1651	Dielectric	5.552	4.200	0.0195	
4	Inner 4					1.400			3
			Polar Samples	FR4 Core	FR4	12.000	4.200	0.0195	
						1.400			
			Polar Samples	PrePreg 1651	Dielectric	5.552	4.200	0.0195	
			Polar Samples	PrePreg 1651	Dielectric	5.552	4.200	0.0195	
			Polar Samples	PrePreg 3080	Dielectric	2.776	4.200	0.0195	
6	Inner 6					1.400			
			Polar Samples	FR4 Core	FR4	3.000	4.200	0.0195	
7	Inner 7					1.400			
			Polar Samples	PrePreg 1080	Dielectric	1.950	4.200	0.0195	
8	Bottom		Polar Samples	Copper Foil	Copper	1.400			4
			Polar Samples	Liquid PhotoImageable Mask	SolderMask	1.000	4.000	0.0195	

Copper Thickness = 11.200 | Dielectric Thickness = 49.660 | Solder Mask Thickness = 2.000 | Stack Up Thickness = 60.860 | Stack Up Thickness with Soldermask = 62.860  
Stack Up Cost = 54.00

Impedance ID	Structure Image	Structure Name	Impedance Signal Layer	Ref. Plane 1 in Layer	Ref. Plane 2 in Layer	Lower Trace Width (W1)	Upper Trace Width (W2)	Trace Separation (S1)	Target Impedance	Calculated Impedance
1		Edge Coupled Coated Microstrip 1B	1	3	0	7.650	6.650	8.115	100.000	100.290
2		Coated Microstrip 1B	1	3	0	4.000	3.000	0.000	75.000	75.740
3		Edge Coupled Offset Stripline 1B1A	4	3	6	7.250	6.250	8.500	100.000	101.280
4		Coated Microstrip 1B	8	6	0	4.000	3.000	0.000	75.000	75.740

StackName: Master  
Date: \_\_\_\_\_  
Author: \_\_\_\_\_  
Department: \_\_\_\_\_  
Site: \_\_\_\_\_

Version: \_\_\_\_\_  
Associated Documents: \_\_\_\_\_

Revision: \_\_\_\_\_  
Modification: \_\_\_\_\_  
Date of Revision: \_\_\_\_\_  
Editor: \_\_\_\_\_


Page 1/X

Copyright © Polar Instruments Ltd

The technical report has also been updated to support layer names



## Copper Finishing classes increased

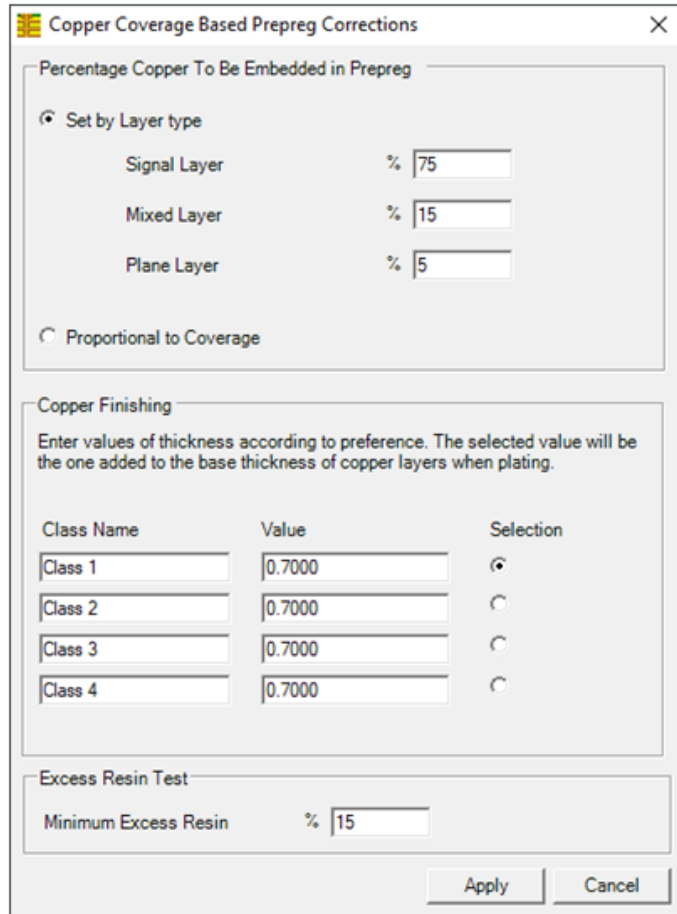

**Copper Coverage Based Prepreg Corrections**

Percentage Copper To Be Embedded in Prepreg

Set by Layer type

Signal Layer      % 75

Mixed Layer      % 15

Plane Layer      % 5

Proportional to Coverage

**Copper Finishing**

Enter values of thickness according to preference. The selected value will be the one added to the base thickness of copper layers when plating.


Class Name	Value	Selection
Class 1	0.7000	<input checked="" type="radio"/>
Class 2	0.7000	<input type="radio"/>
Class 3	0.7000	<input type="radio"/>
Class 4	0.7000	<input type="radio"/>

Excess Resin Test

Minimum Excess Resin      % 15

Apply      Cancel

Speedstack v21.04 and earlier supported 4 classes

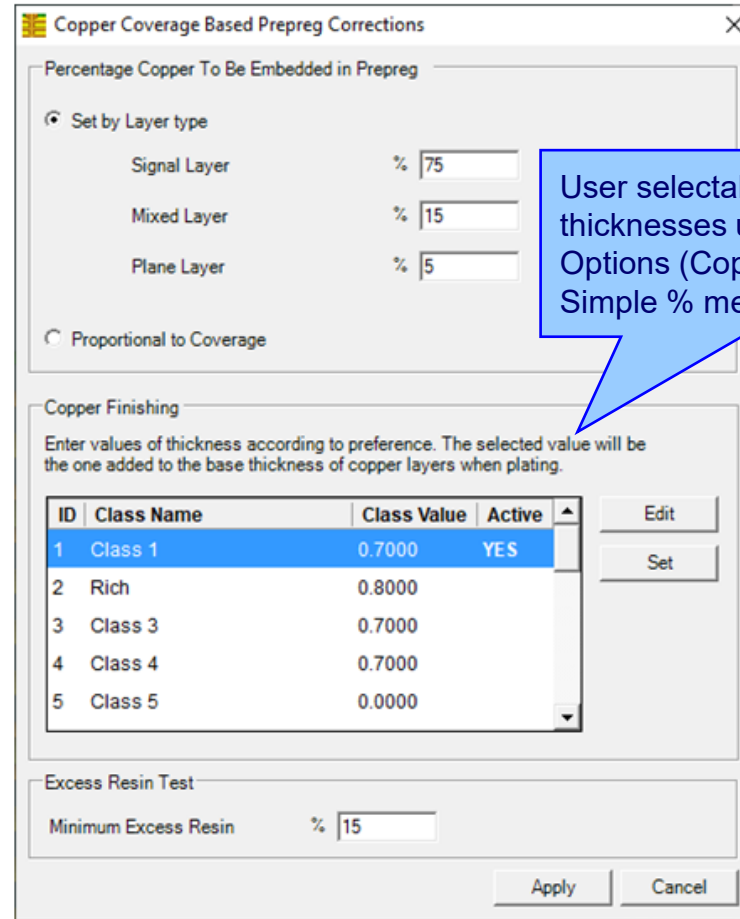**Copper Coverage Based Prepreg Corrections**

Percentage Copper To Be Embedded in Prepreg

Set by Layer type

Signal Layer      % 75

Mixed Layer      % 15

Plane Layer      % 5

Proportional to Coverage

**Copper Finishing**

Enter values of thickness according to preference. The selected value will be the one added to the base thickness of copper layers when plating.

ID	Class Name	Class Value	Active
1	Class 1	0.7000	YES
2	Rich	0.8000	
3	Class 3	0.7000	
4	Class 4	0.7000	
5	Class 5	0.0000	

Excess Resin Test

Minimum Excess Resin      % 15

Apply      Cancel

User selectable plating thicknesses under Finishing Options (Copper Coverage & Simple % methods)

Speedstack v21.05 now supports 20 classes


## Import / Export enhancements

The following Import / Export options have been updated to support the layer name property introduced with Speedstack v21.05.06:

- XML STKX v21.00 and SSX v11.00 import / export options
- CSV export option
- Gerber / DXF export option

# Speedstack v21.04.00 (April 2021)

## All Losses plot - clearer labelling

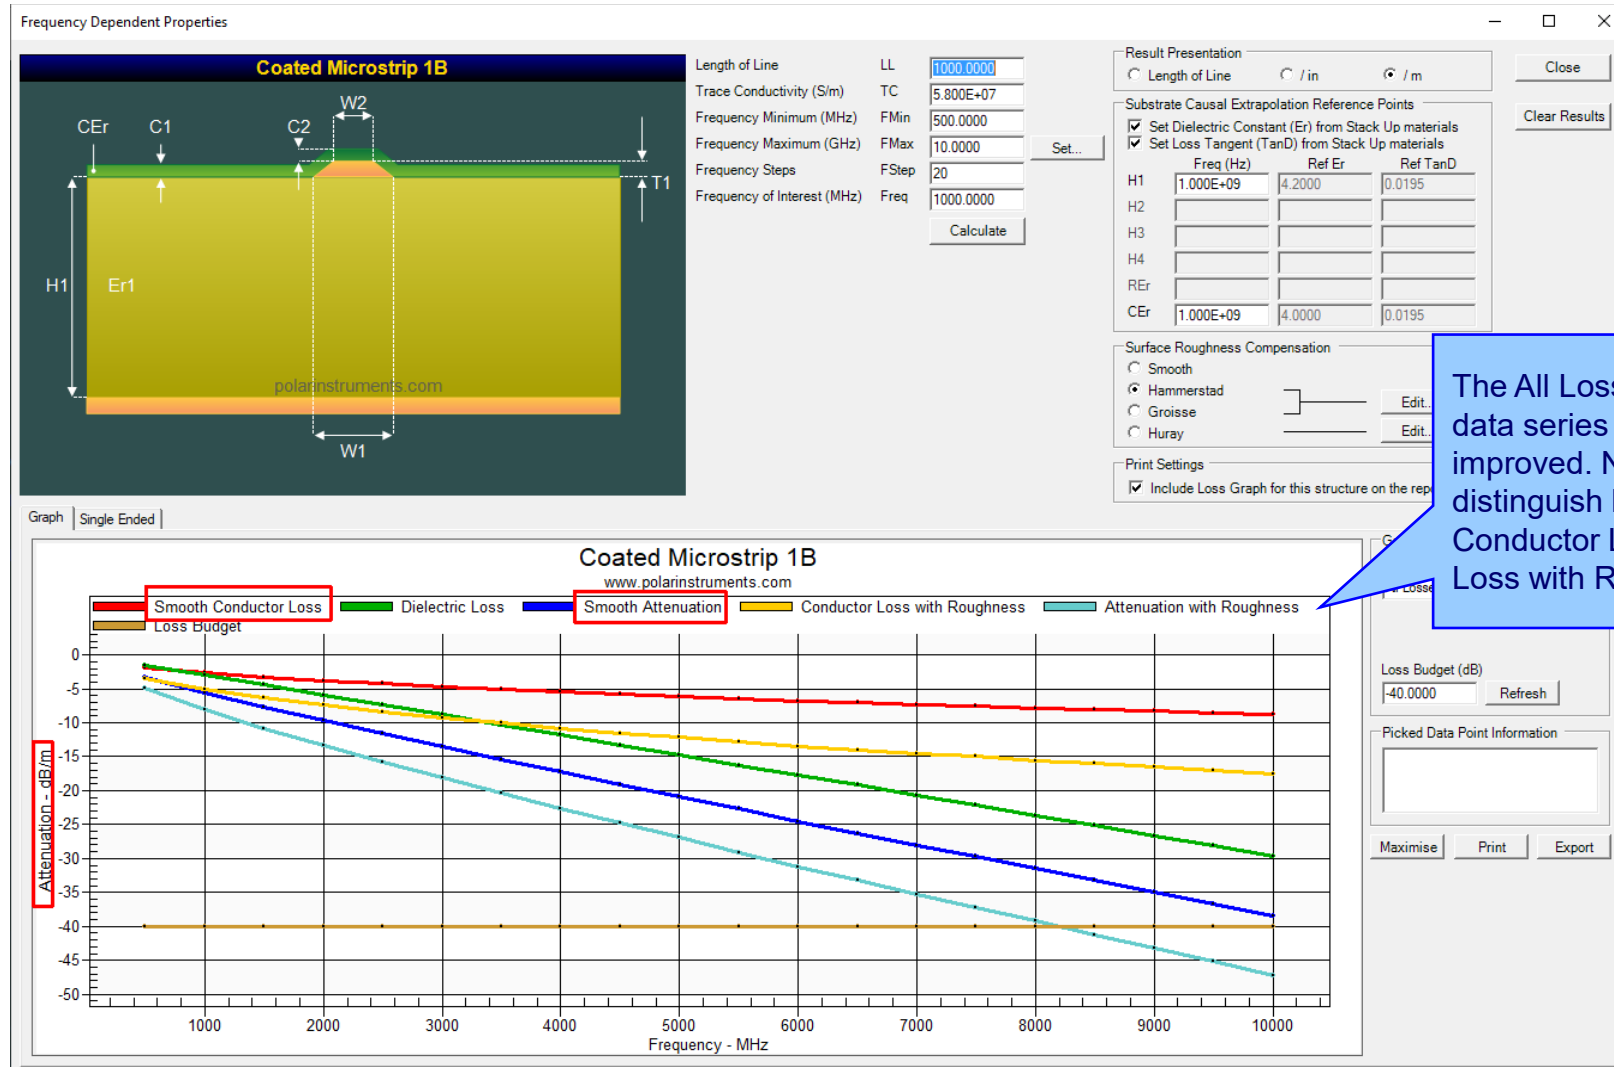

## Other enhancements

- The controlled impedance and insertion loss Calculation Engine updated to the latest edition
- Frequency Dependent Calculations graphing library enhancements

# Speedstack v21.03.09 (March 2021)

## New Apply Plating Colours toolbar option

The screenshot shows the Polar Speedstack Stack Up Builder interface. The main window displays a 3D cross-section of a PCB stack-up with various layers. A toolbar at the top contains several icons, with one icon (a stack of layers with a color gradient) highlighted by a red box. A blue callout box points to this icon, stating: "New Apply Plating Colours toolbar option. Toggle between standard and enhanced colours".

On the right side of the interface, there is a 'Stack Up Information' panel with a table of values:

Field	Value
Electrical Layer Count	8
Stack Up Cost	54.00
Copper Thickness	11.2000
Dielectric Thickness	49.6600
Solder Mask Thickness	2.0000
=====	
Target Stack Up Thickness	60.0000
Stack Up Thickness	60.8600
Stack Up Thickness with Soldermask	62.8600
=====	


Below this table is a 'Selected Item Information' section which is currently empty.

At the bottom of the interface, there is a status bar with the following text: "Mils/Thous | Target Stack Up Thickness = 60.0000 | Stack Up Thickness = 60.8600 | Stack Up Thickness with Soldermask = 62.8600 | V21.03.09".

Automatically assign different colours to plated and un-plated copper layers.

Plated layers are determined by checking the copper base and finished thickness. Plated layers are shown as a darker colour

## New Apply Plating Colours toolbar option

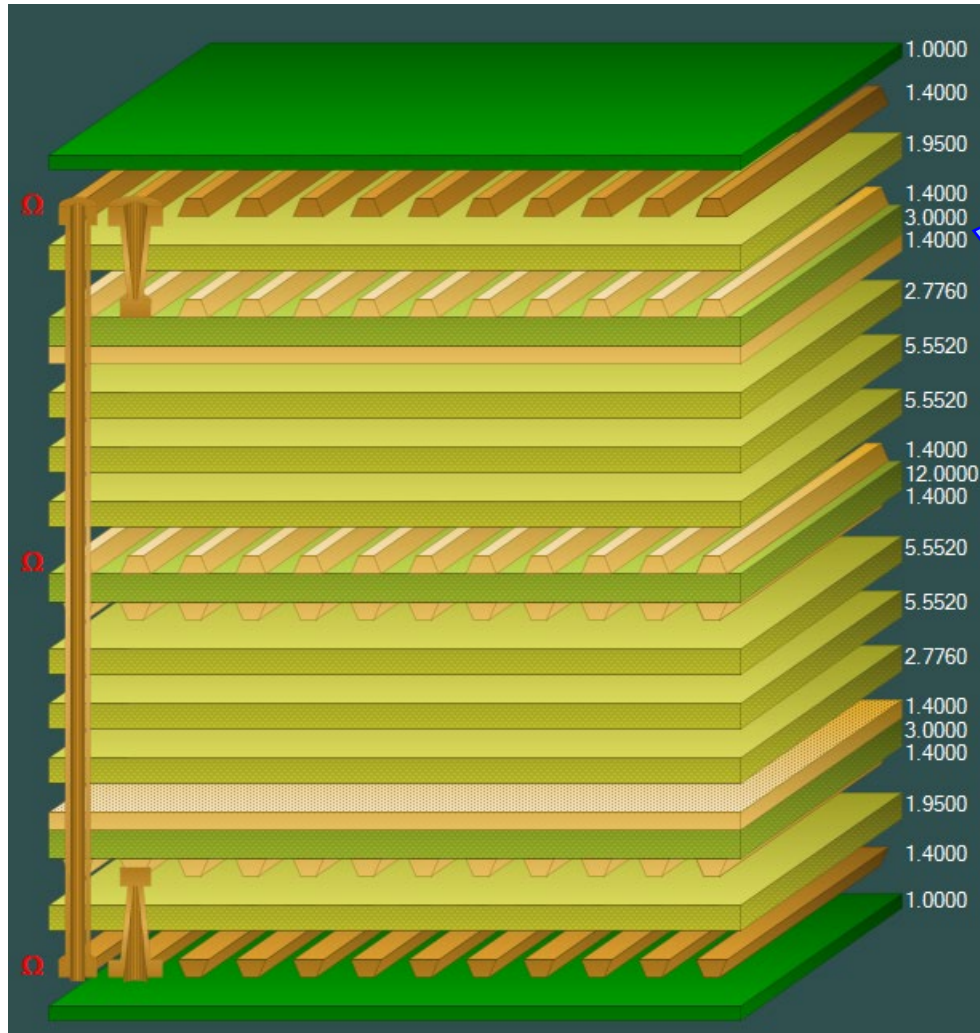

### Plated Copper Layers

During PCB fabrication drill holes commonly have copper applied to the barrel wall by an electroplating process. This provides an interconnect between copper layers in the stack up.

This electroplating process often results in additional copper also being applied to the exposed copper layers where the mechanical drill starts / ends.

It is important to account for this additional plated copper thickness when calculating the overall stack up thickness and controlled impedance / insertion loss structures.


Speedstack has always allowed this additional plating thickness to be applied to the relevant copper layers. With v21.03 this has been enhanced further with automatic colour assignments to the plated and unplated layers




New Apply Plating Colours toolbar option



Standard Colours

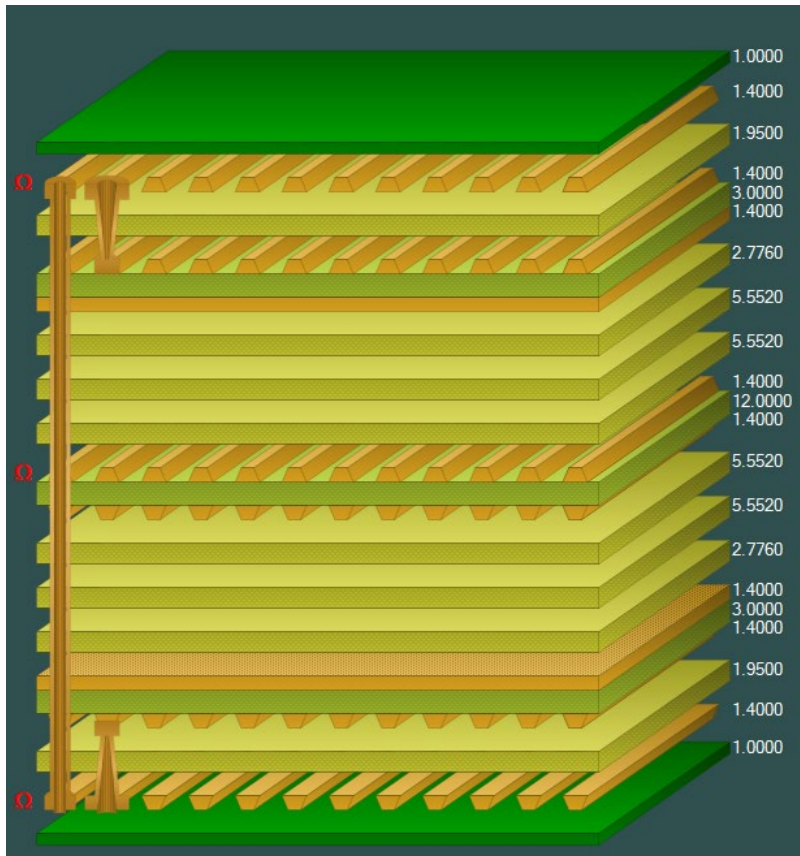

Apply Plating Colours

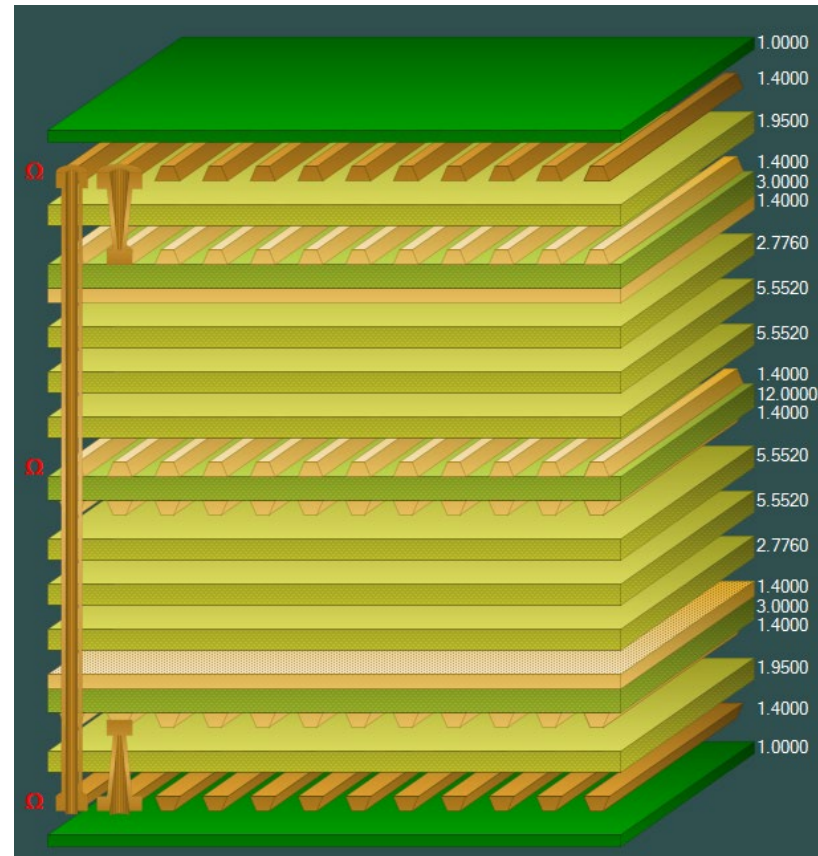

## New Apply Plating Colours toolbar option

Speedstack Report Printer

File Options

C:\Appst\Samples\Eval Imperial.sci Units: MILs

Layer	Stack up	Supplier	Description	Type	Processed Thickness	cr	Loss Tangent	Impedance ID
1		Polar Samples	Liquid Photoimageable Mask	SolderMask	1.000	4.000	0.0195	
		Polar Samples	Copper Foil	Copper	1.400			1, 2
2		Polar Samples	PreProg 1080	Dielectric	1.950	4.200	0.0195	
3		Polar Samples	FR4 Core	FR4	1.400	3.000	4.200	0.0195
		Polar Samples	PreProg 3080	Dielectric	2.776	4.200	0.0195	
		Polar Samples	PreProg 1651	Dielectric	5.552	4.200	0.0195	
		Polar Samples	PreProg 1651	Dielectric	5.552	4.200	0.0195	
4		Polar Samples	FR4 Core	FR4	1.400	12.000	4.200	0.0195
		Polar Samples	PreProg 1651	Dielectric	5.552	4.200	0.0195	
		Polar Samples	PreProg 1651	Dielectric	5.552	4.200	0.0195	
		Polar Samples	PreProg 3080	Dielectric	2.776	4.200	0.0195	
5		Polar Samples	FR4 Core	FR4	1.400	3.000	4.200	0.0195
		Polar Samples	PreProg 1080	Dielectric	1.950	4.200	0.0195	
6		Polar Samples	PreProg 1080	Dielectric	1.950	4.200	0.0195	
7		Polar Samples	Copper Foil	Copper	1.400			4
8		Polar Samples	Liquid Photoimageable Mask	SolderMask	1.000	4.000	0.0195	

Copper Thickness = 11.200 | Dielectric Thickness = 49.660 | Solder Mask Thickness = 2.000 | Stack Up Thickness = 60.860 | Stack Up Thickness with Soldermask = 62.860  
Stack Up Cost = 54.00

Notes


Impedance ID	Structure Image	Structure Name	Impedance Signal Layer	Ref. Plane 1 in Layer	Ref. Plane 2 in Layer	Lower Trace Width (W1)	Upper Trace Width (W2)	Trace Separation (S1)	Target Impedance	Tol (+/- %)	Calculated Impedance
1		Edge Coupled Coated Microstrip 1B	1	3	0	7.650	6.650	8.115	100.000	10.000	100.290
2		Coated Microstrip 1B	1	3	0	4.000	3.000	0.000	75.000	10.000	75.740
3		Edge Coupled Offset Stripline 1B1A	4	3	6	7.250	6.250	8.500	100.000	10.000	101.280

StackName: Master	Version:	Revision:	Modification:	Date of Revision:	Editor:	Page 1/1
Date:	Associated Documents:					
Author:						
Department:						
Site:						

Copyright © Polar Instruments Ltd

The technical report will also show the plated and un-plated copper layers.

## New Apply Plating Colours toolbar option

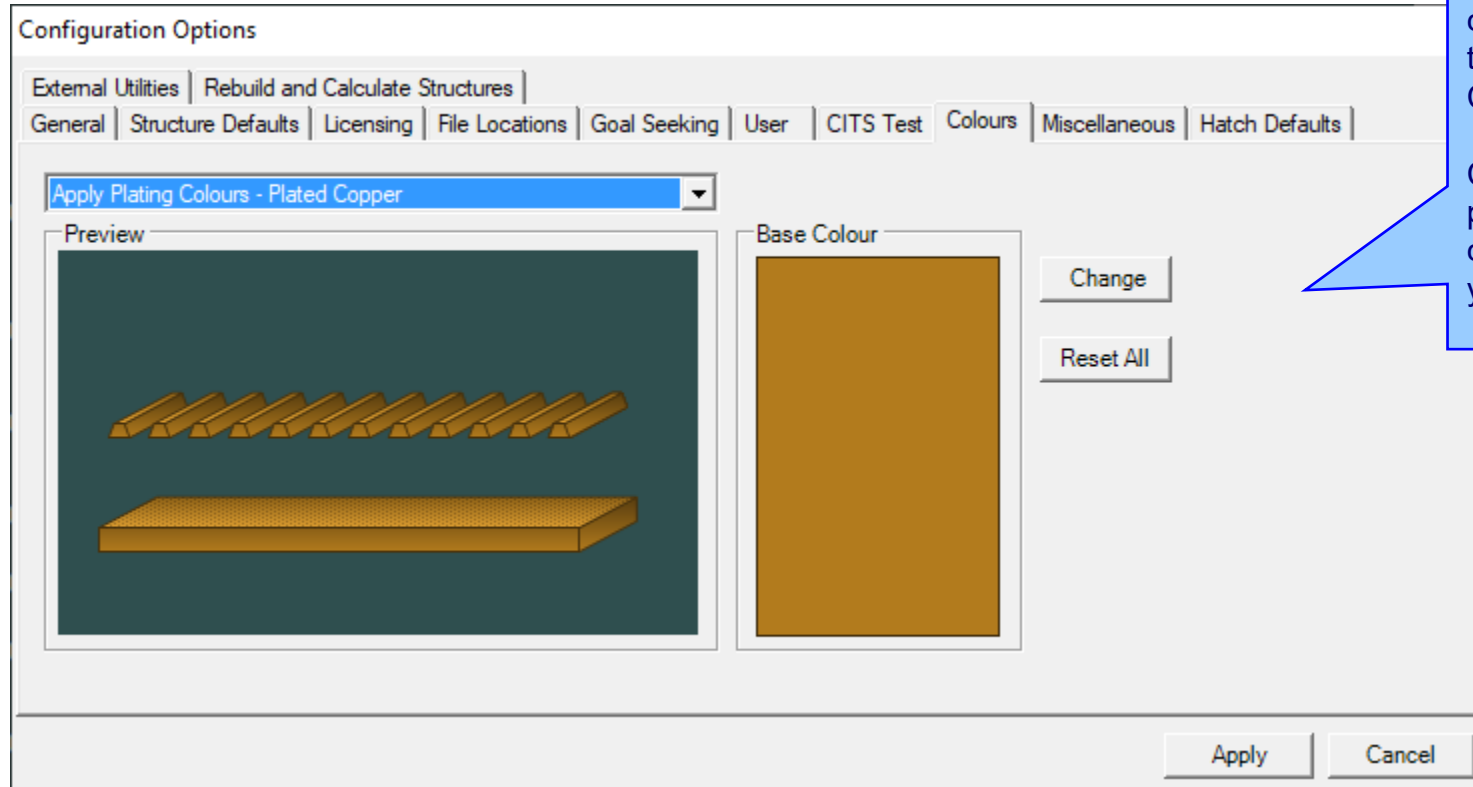

Two new user-definable colours have been introduced to the Speedstack Configuration Options.

Customise the Plated and Un-plated colours to suit existing colour schemes adopted by your organisation

## Online Library enhancements

The screenshot shows the 'Online Library' window with several callouts:

- Filter by Supplier:** Callouts highlight logos for **SHOWA DENKO** and **TATSUTA**, with the text: "Showa Denko and Tatsuta have recently joined the Polar Material Partner program".
- File Type:** A list of file types including Foils, RCCs, PrePregs, Cores, SolderMasks, Idents, Peelables, Coverlays, BondPly, Adhesives, FlexCores, and Shields.
- Filter by Frequency:** Callout: "Filter downloadable libraries by frequency. The frequency of the dielectric constant (Er) / loss tangent (TanD) material properties". Options include All, 1 GHz, 5 GHz, 10 GHz, 20 GHz, 50 GHz, and 75 GHz.
- Library Files Available:** A list of files such as ShowaDenko\_GEA\_679\_1GHz\_1901.mlbx, Taconic\_FR\_25\_10GHz\_1901.mlbx, etc.
- Existing Data Table:** Callout: "Improvements to On-Premise Mode to help users where, for security reasons, no Internet connection is available". Options for 'Clear' and 'Append' are shown.
- File Access Mode:** Callout: "Improvements to On-Premise Mode to help users where, for security reasons, no Internet connection is available". Options for 'Online Polar Library ( ftp://polarinstruments.com )' and 'On-Premise Mode' are shown, with a text box for the local path: "C:\Users\richa\Desktop\Material\_Library\_2021".

Please Note: This data is accurate to the best of our knowledge, however it is provided, as is from our Material supplier partners. Please feedback any errors or inaccuracies to Polarcare and we will contact the material partner for clarification or rectification.

# Speedstack v21.02.01 (February 2021)

## New Shield material

The screenshot shows the Polar Speedstack Stack Up Builder interface. The main window displays a 3D stack-up model of a PCB with various layers. A red box highlights the top and bottom shield layers. Below the model is a table listing the layers:

Layer	Type	Material	Thickness
1	Shield	EMI Shield Film	4.200/0.0195
-	PP	PrePreg 1080	4.200/0.0195
2	Core	FR4 Core	4.200/0.0195
-	PP	PrePreg 1080	4.200/0.0195
4	Shield	EMI Shield Film	4.200/0.0195

At the bottom of the interface, the status bar shows: Target Stack Up Thickness = 30.0000, Stack Up Thickness = 29.6000, Stack Up Thickness with Soldermask = 29.6000, Beta V21.02.01.

Speedstack v21.02 introduces support for a new Shield material type.

Shield materials are used to prevent electromagnetic interference (EMI) from being either absorbed or radiated.

## New Shield material

Shields are typically applied to the outer layer(s) of the stack up


1	Shield	EMI Shield Film	4.200/0.0195	1.4000	5.0000
-	PP	PrePreg 1080	4.200/0.0195	3.0000	
2	Core	FR4 Core	4.200/0.0195	1.4000	8.0000
3				1.4000	
-	PP	PrePreg 1080	4.200/0.0195	3.0000	
-	Shield	EMI Shield Film	4.200/0.0195	5.0000	1.4000
4				1.4000	




They consist of a shield layer (brown) and dielectric adhesive (silver)



## Shield material examples

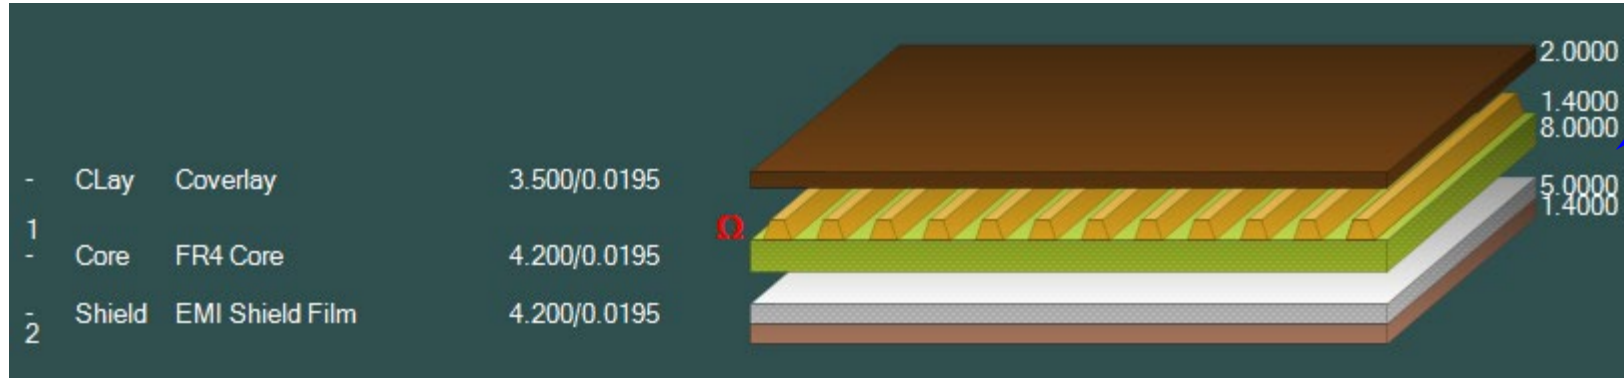


Example #1  
Single-sided core,  
coverlay above trace,  
shield below

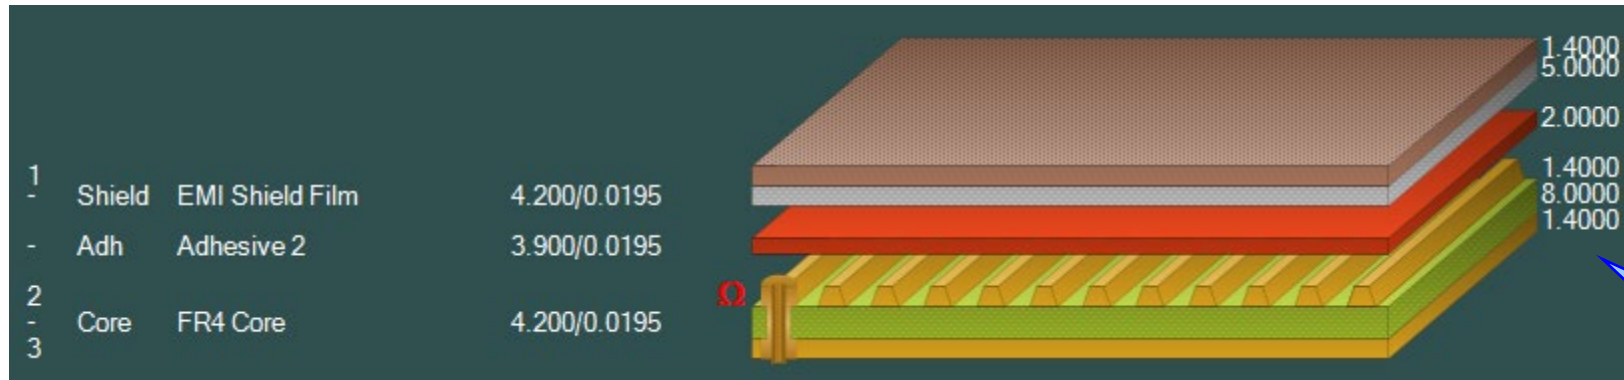


Example #2  
Double-sided core,  
adhesive and shield  
above



## Shield material examples

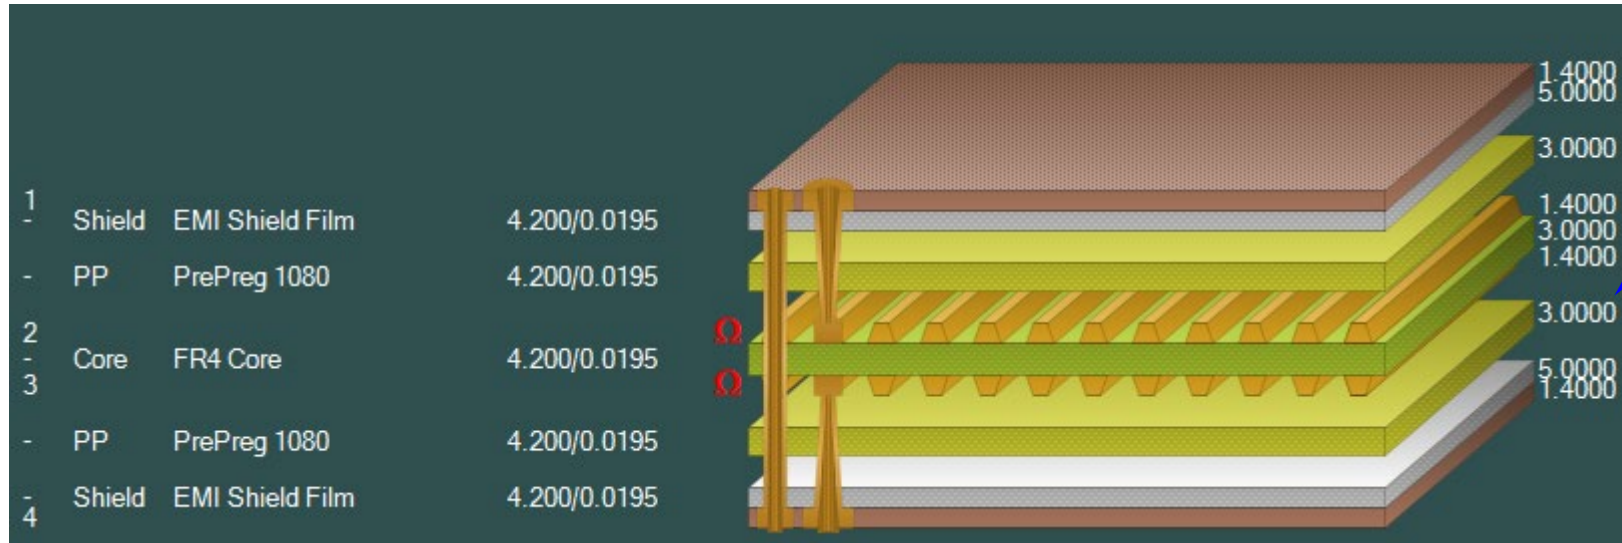


Example #3  
 Double-sided core with two signal trace layers with shield above and below trace layers

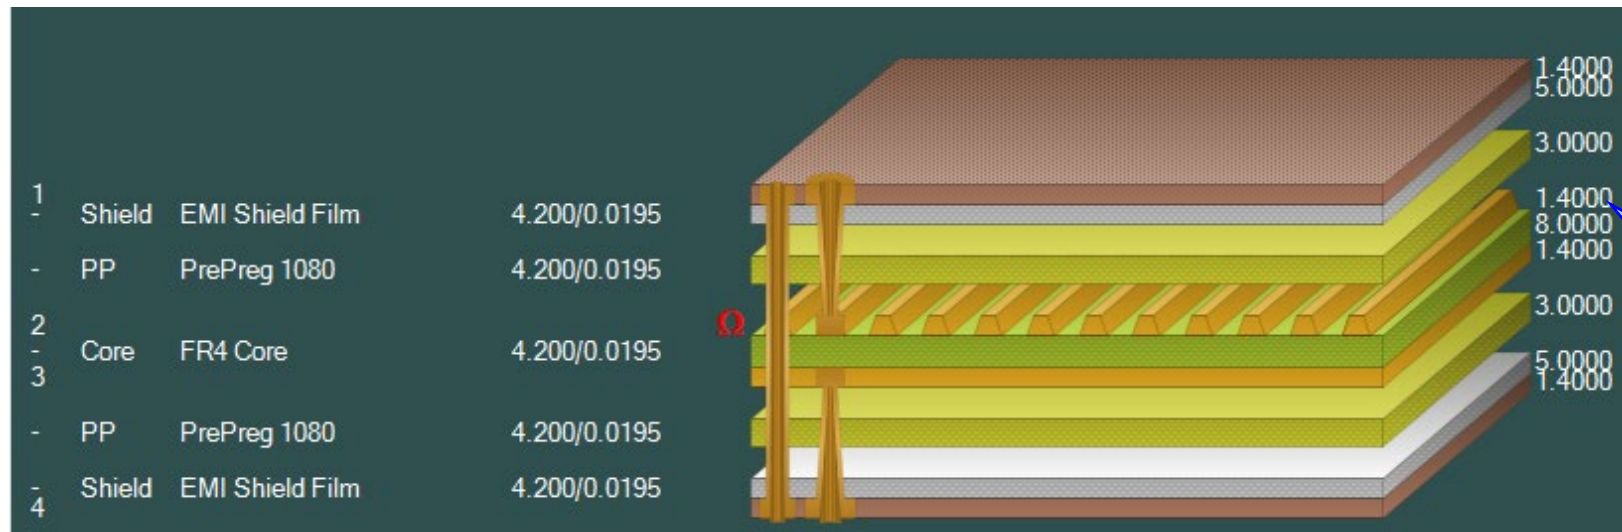

Example #4  
 Double-sided core with one signal trace layer with shield above and below trace layers

## Material library enhancements

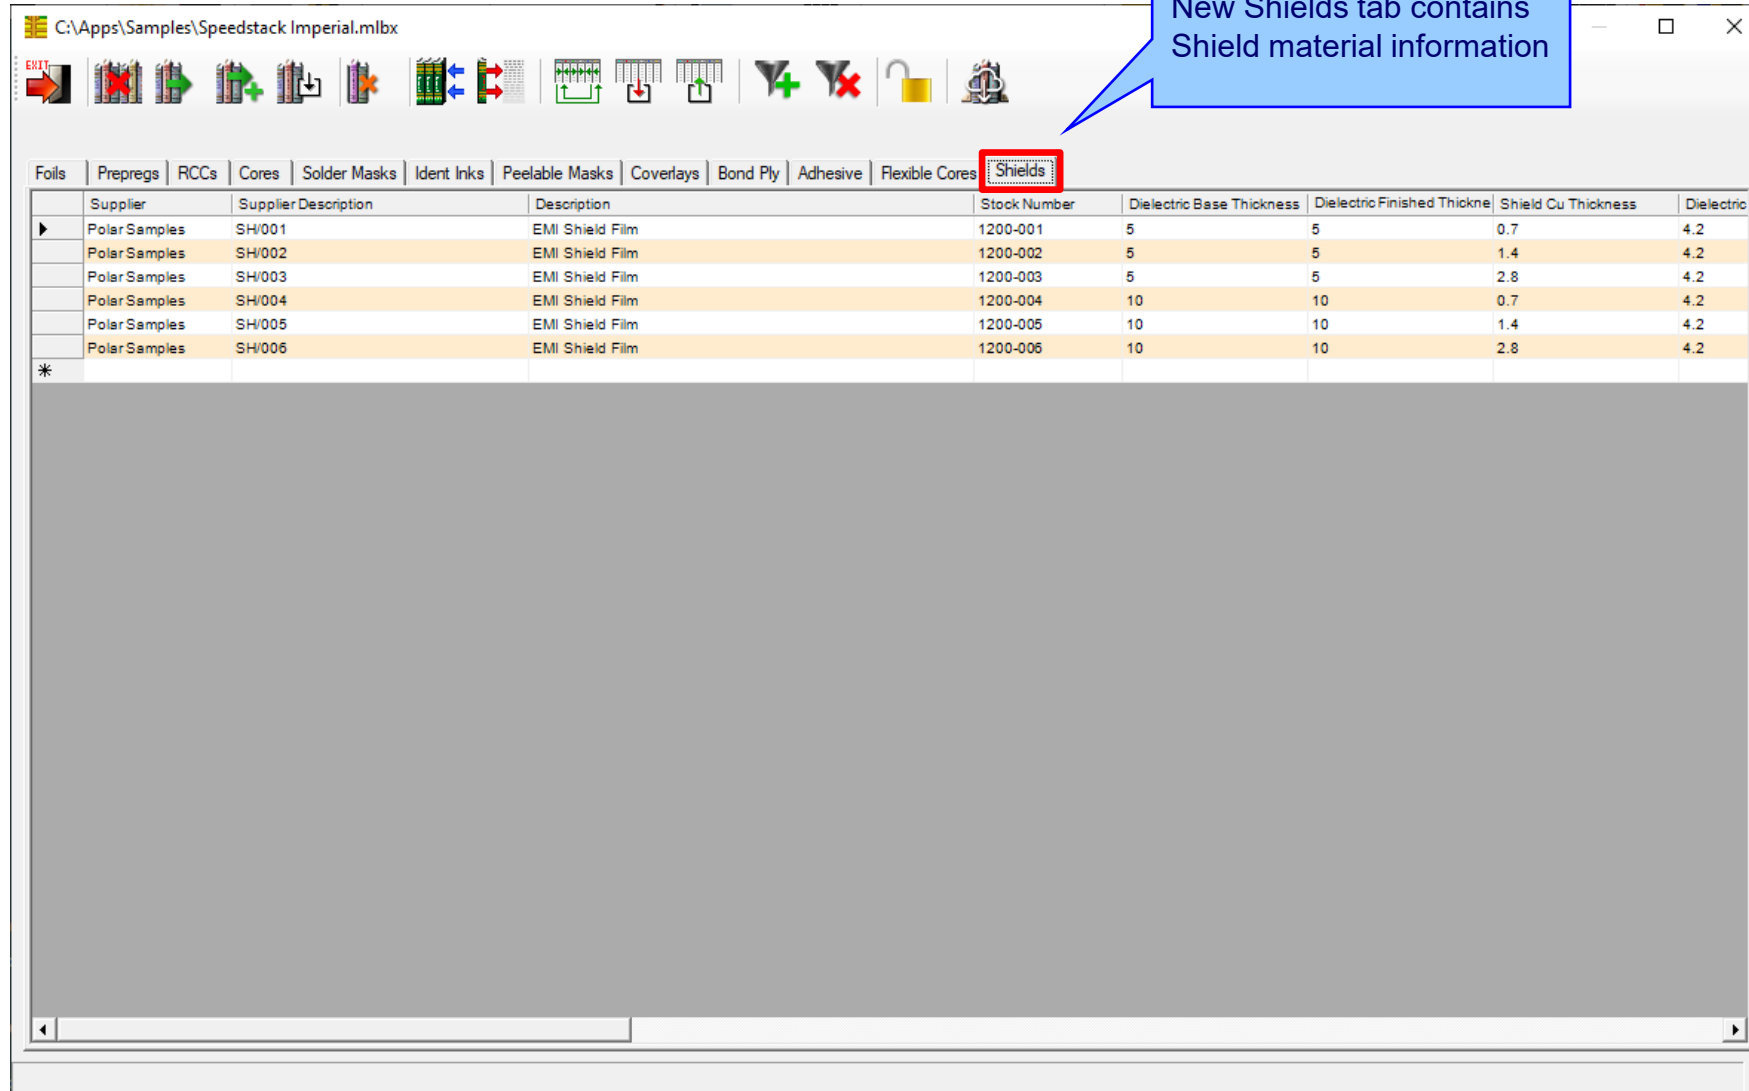

The screenshot shows the Speedstack software interface with the 'Shields' tab selected in the material library. The 'Shields' tab is highlighted with a red box. A blue callout box points to the 'Shields' tab with the text 'New Shields tab contains Shield material information'.

	Supplier	Supplier Description	Description	Stock Number	Dielectric Base Thickness	Dielectric Finished Thickne	Shield Cu Thickness	Dielectric
▶	Polar Samples	SH/001	EMI Shield Film	1200-001	5	5	0.7	4.2
	Polar Samples	SH/002	EMI Shield Film	1200-002	5	5	1.4	4.2
	Polar Samples	SH/003	EMI Shield Film	1200-003	5	5	2.8	4.2
	Polar Samples	SH/004	EMI Shield Film	1200-004	10	10	0.7	4.2
	Polar Samples	SH/005	EMI Shield Film	1200-005	10	10	1.4	4.2
	Polar Samples	SH/006	EMI Shield Film	1200-006	10	10	2.8	4.2

## Material library enhancements


Review/Edit Shield

Supplier	<input type="text" value="Polar Samples"/>	Size	<input type="text" value="*"/>
Supplier Description	<input type="text" value="SH/001"/>	Note 1	<input type="text"/>
Description	<input type="text" value="EMI Shield Film"/>	Note 2	<input type="text"/>
StockNumber	<input type="text" value="1200-001"/>	Note 3	<input type="text"/>
Type	<input type="text" value="Shield"/>	Note 4	<input type="text"/>
Base Thickness	<input type="text" value="5.0000"/>	Note 5	<input type="text"/>
Finished Thickness	<input type="text" value="5.0000"/>		
Dielectric Constant	<input type="text" value="4.2"/>		
Loss Tangent	<input type="text" value="0.0195"/>		
Resin Content	<input type="text" value="0"/>		
Tg	<input type="text" value="0"/>		
Td	<input type="text" value="0"/>		
CAF Resistance	<input type="text" value="0"/>		
Z Axis Expansion	<input type="text" value="0"/>		
Excess Resin	<input type="text" value="0.0000"/>		
Tolerance +/-%	<input type="text" value="10"/>		
Shield Copper Thickness	<input type="text" value="0.7000"/>		
Cost	<input type="text" value="0"/>		
Lead Time	<input type="text" value="0"/>		
Laser Drillable	<input type="checkbox"/>		

1 of 6

Material library Edit Shield dialog

## Online Library enhanced to support Shield materials

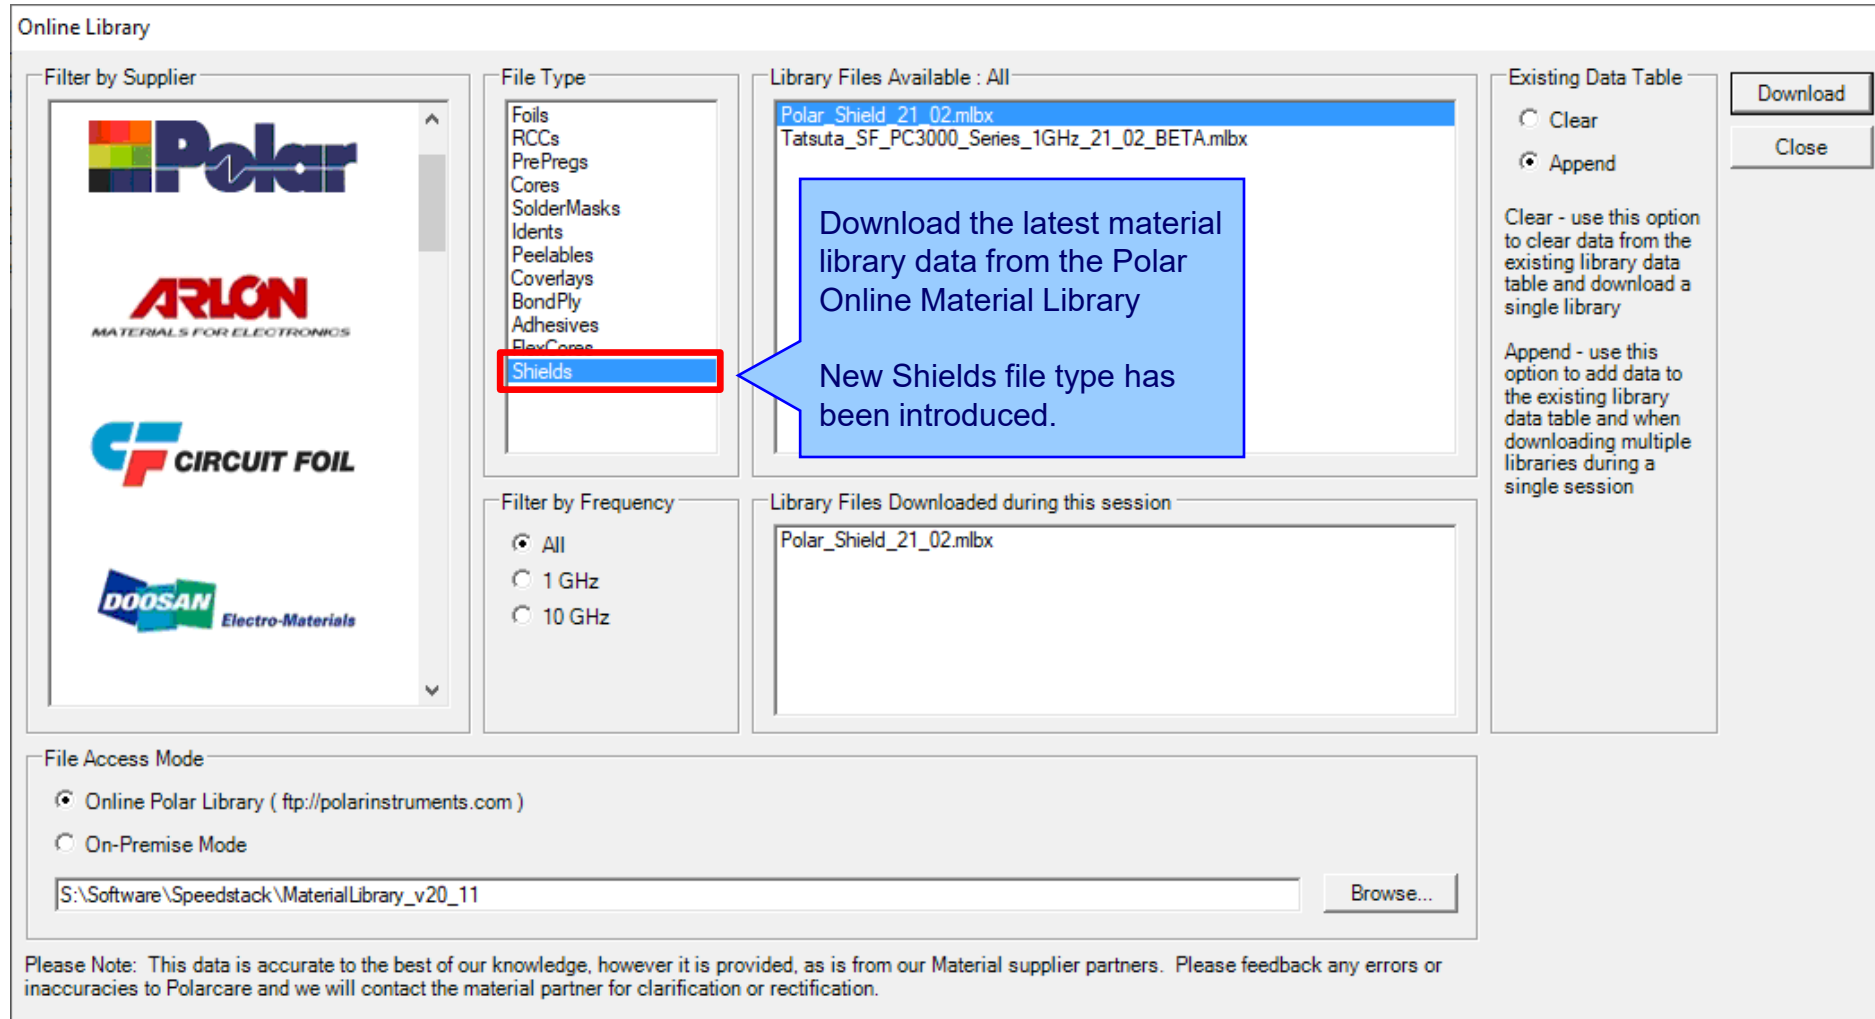

Online Library

Filter by Supplier

- Polar
- ARLON  
MATERIALS FOR ELECTRONICS
- CIRCUIT FOIL
- DOOSAN  
Electro-Materials

File Type

- Foils
- RCCs
- PrePregs
- Cores
- SolderMasks
- Idents
- Peelables
- Coverlays
- BondPly
- Adhesives
- FlexCores
- Shields**

Library Files Available : All

- Polar\_Shield\_21\_02.mlbx
- Tatsuta\_SF\_PC3000\_Series\_1GHz\_21\_02\_BETA.mlbx

Existing Data Table

Clear

Append

Clear - use this option to clear data from the existing library data table and download a single library

Append - use this option to add data to the existing library data table and when downloading multiple libraries during a single session

Download

Close

Library Files Downloaded during this session

- Polar\_Shield\_21\_02.mlbx

Filter by Frequency

All

1 GHz

10 GHz

File Access Mode

Online Polar Library ( ftp://polarinstruments.com )

On-Premise Mode


S:\Software\Speedstack\MaterialLibrary\_v20\_11

Browse...


Please Note: This data is accurate to the best of our knowledge, however it is provided, as is from our Material supplier partners. Please feedback any errors or inaccuracies to Polarcare and we will contact the material partner for clarification or rectification.

## Export / Import Shield library to Excel

Supplier	Supplier Description	Description	Stock Number	Dielectric Base Thickness	Dielectric Finished Thickness	Shield Cu Thickness	Dielectric
Polar Samples	SH001	EMI Shield Film	1200-001	5	5	0.7	4.2
Polar Samples	SH002	EMI Shield Film	1200-002	5	5	1.4	4.2
Polar Samples	SH003	EMI Shield Film	1200-003	5	5	2.8	4.2
Polar Samples	SH004	EMI Shield Film	1200-004	10	10	0.7	4.2
Polar Samples	SH005	EMI Shield Film	1200-005	10	10	1.4	4.2
Polar Samples	SH006	EMI Shield Film	1200-006	10	10	2.8	4.2

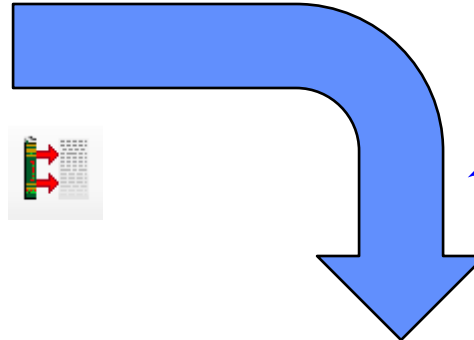


It is possible to export / import Shield library data with 3<sup>rd</sup> part tools like Excel

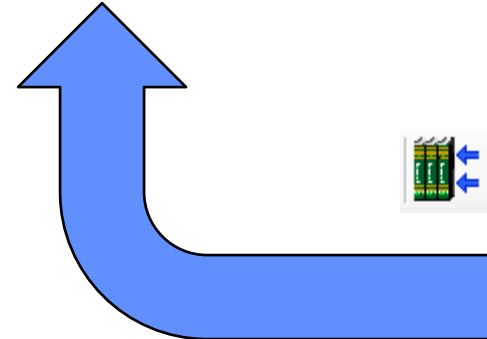

Type	Supplier	Supplier Description	Description	Stock Number	Shield Cu Thickness	Dielectric Base Thickness	Dielectric Finished Thickness	Dielectric Constant	Dielectric Loss Tangent	Dielectric Resin Content	Tg	Td	CAF Resistance	ZAxisExpansion	ExcessResin	Tolerance	LaserDrillable	
Shield	Polar Samples	SH/001	EMI Shield Film	1200-001	0.7	5	5	4.2	0.0195	0	0	0	0	0	0	0	10	FALSE
Shield	Polar Samples	SH/002	EMI Shield Film	1200-002	1.4	5	5	4.2	0.0195	0	0	0	0	0	0	0	10	FALSE
Shield	Polar Samples	SH/003	EMI Shield Film	1200-003	2.8	5	5	4.2	0.0195	0	0	0	0	0	0	0	10	FALSE
Shield	Polar Samples	SH/004	EMI Shield Film	1200-004	0.7	10	10	4.2	0.0195	0	0	0	0	0	0	0	10	FALSE
Shield	Polar Samples	SH/005	EMI Shield Film	1200-005	1.4	10	10	4.2	0.0195	0	0	0	0	0	0	0	10	FALSE
Shield	Polar Samples	SH/006	EMI Shield Film	1200-006	2.8	10	10	4.2	0.0195	0	0	0	0	0	0	0	10	FALSE

## Stack up editor enhancements

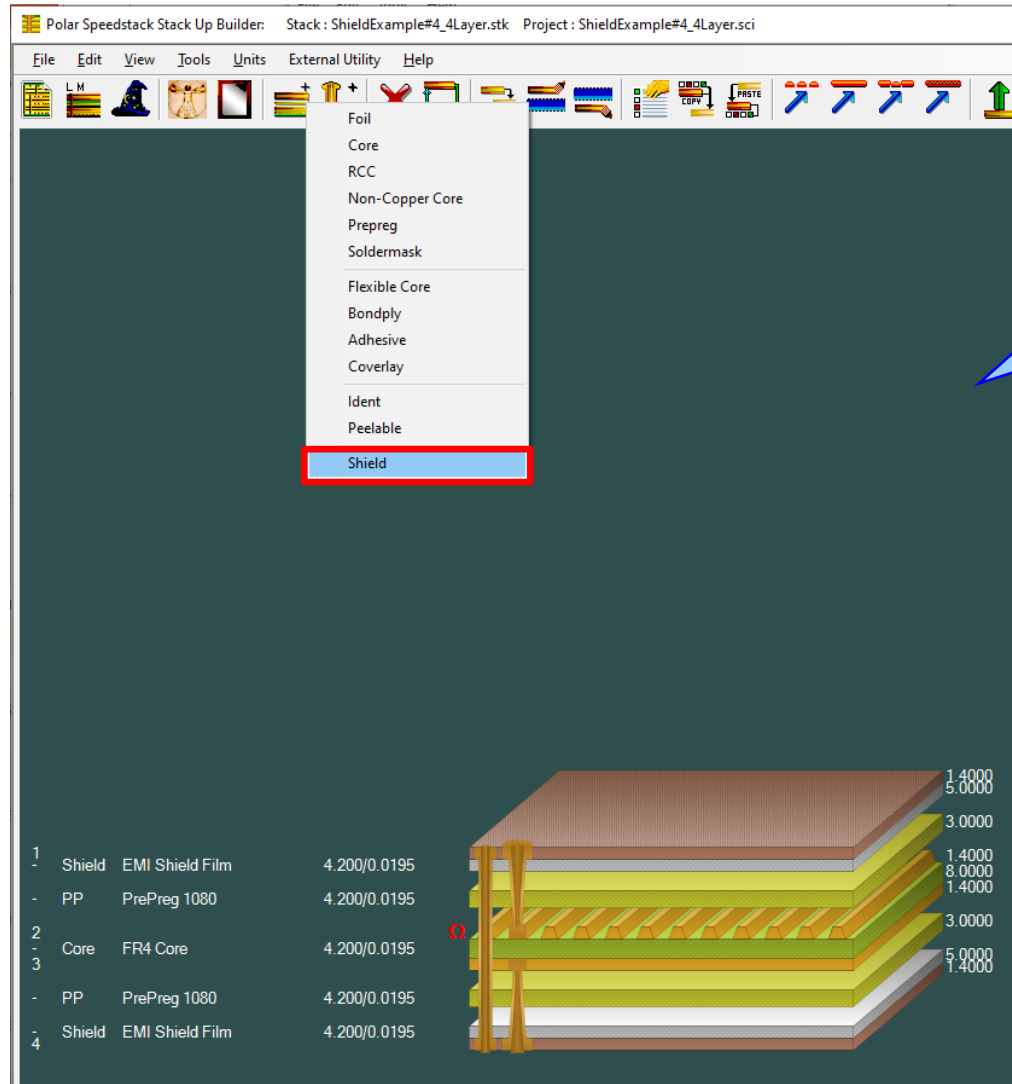

Stack Up editor enhancements:

Shield material options to add, delete, swap, move up, move down, symmetry and set properties

# Shield properties

Shield Properties

Main | Notes | Attributes

General Information

Supplier: Polar Samples

Supplier Description: SH/002

Description: EMI Shield Film

Stock Number: 1200-002

Type: Shield

Shield Copper

Base Thickness: 1.4000

Finished Thickness: 1.4000

Copper Coverage %: 0.00

Graphical Colour: [Color]

Trace Inverted:

Finishing Applied:

Remove Copper (disabled if structures or sub-stacks exist)

Shield Dielectric

Base Thickness: 5.0000

Finished Thickness: 5.0000

Dielectric Constant: 4.2000

Loss Tangent: 0.0195

Resin Content %: 0.00

Tg: 0.0

Td: 0.0

CAF Resistance: 0.0

Z Axis Expansion: 0.0

Excess Resin: 0.0000

Isolation Distance: 5.0000

Graphical Colour: [Color]

Layer	Material	Thickness	Order
1	Shield EMI Shield Film	4.200/0.0195	1.4000
-	PP PrePreg 1080	4.200/0.0195	5.0000
2	Core FR4 Core	4.200/0.0195	3.0000
3	PP PrePreg 1080	4.200/0.0195	8.0000
-	PP PrePreg 1080	4.200/0.0195	1.4000
-	PP PrePreg 1080	4.200/0.0195	3.0000
4	Shield EMI Shield Film	4.200/0.0195	5.0000
			1.4000

Data Filenames

Dielectric Base Thickness	5.0000
Dielectric Finished Thickness	5.0000
Dielectric Constant	4.2
Loss Tangent	0.0195
Resin Content	0
Tg	0
Td	0
CAF Resistance	0
Z Axis Expansion	0
Excess Resin	0.0000

Mils/Thous Target Stack Up Thickness = 30.0000 Stack Up Thickness = 29.6000 Stack Up Thickness with Soldermask = 29.6000 Beta V21.02.01

View and customise the Shield properties. Useful in 'what-if' scenarios

## Controlled impedance and insertion loss calculations

The screenshot shows the Polar Speedstack Stack Up Builder interface. The main window displays a 3D stack up model with a red box highlighting the shield material. A table on the left lists the stack up layers:

Layer	Material	Thickness (Mils/Thous)
1	Shield EMI Shield Film	3.500/0.0180
-	PP PrePreg 1080	4.200/0.0195
2	Core FR4 Core	4.200/0.0195
-	PP PrePreg 1080	4.200/0.0195
3	Shield EMI Shield Film	4.200/0.0195

The right panel shows the 'Controlled Impedance' results for 'Offset Stripline 102A'. A table lists the parameters:

Substrate 1 Height	H1	8.0000
Substrate 1 Dielectric	Er1	4.2000
Substrate 2 Height	H2	4.4000
Substrate 2 Dielectric	Er2	4.2000
Substrate 3 Height	H3	5.0000
Substrate 3 Dielectric	Er3	3.5000
Lower Trace Width	W1	6.4000
Upper Trace Width	W2	5.4000
Trace Thickness	T1	1.4000
<b>Impedance</b>	<b>Zo</b>	50.46
Target Impedance		50.00
Target Tolerance %		10.00

Shield material in stack up


Impedance and insertion calculations support the new Shield material type.

Shield material region of structure.

Shield adhesive height / thickness dimension and dielectric constant.



## Controlled impedance and insertion loss calculations

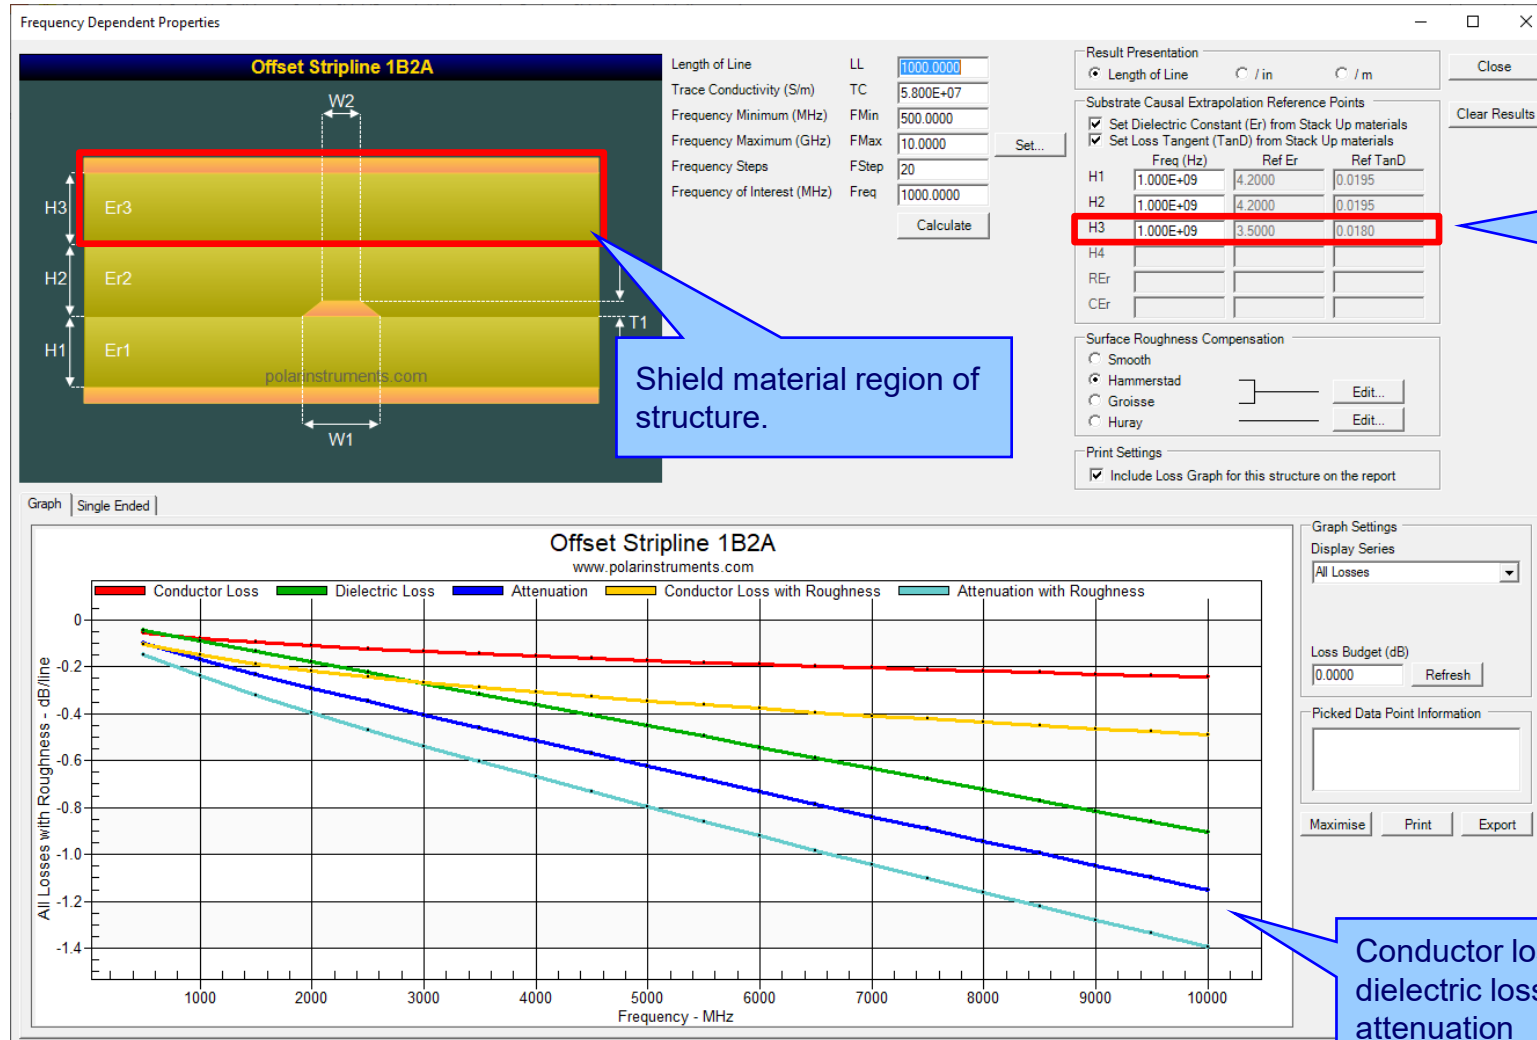


Shield adhesive dielectric constant / loss tangent.

Shield material region of structure.

Conductor loss, dielectric loss, total attenuation

## Controlled impedance and insertion loss calculations

*Please note: Speedstack is capable of supporting many shield types for stack up design and documentation. However, it is important to use the correct type of shield material for controlled impedance and insertion loss applications. They are often designated by the shield vendor as ‘for high speed signal transmission applications’.*

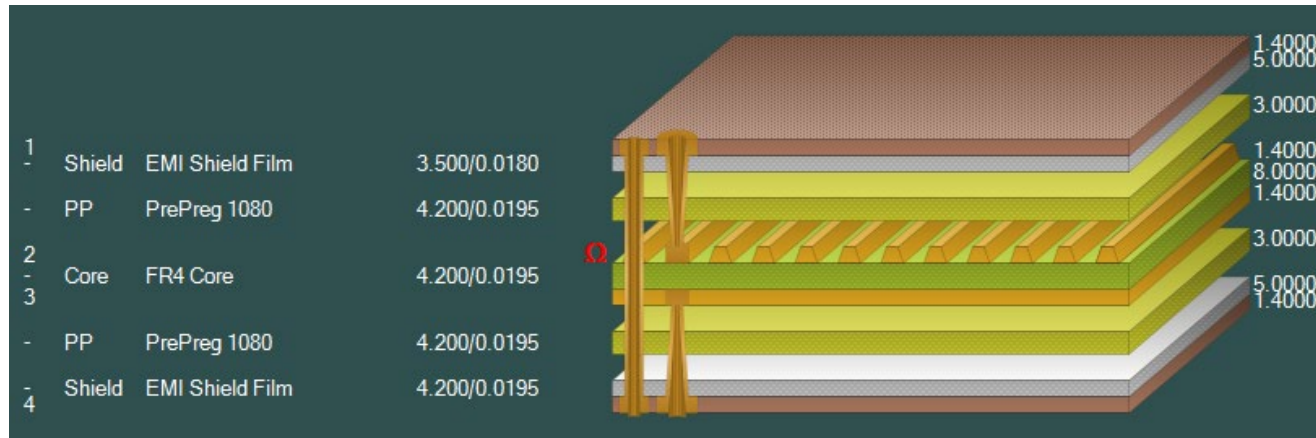

# Technical report enhancements

Technical report showing shield materials

Speedstack Report Printer  
File Options

C:\Apps\Samples\ShieldExample\F5\_4layer.sci Units: Mils

Layer	Stack up	Supplier	Description	Type	Processed Thickness	εr	Loss Tangent	Impedance ID
1		Polar Samples	EMI Shield Film	Shield	1.400			
		Polar Samples	PrePreg 1080	Dielectric	3.000	3.500	0.0180	
		Polar Samples	FR4 Core	FR4	1.400	4.200	0.0195	1, 2
2		Polar Samples	PrePreg 1080	Dielectric	3.000	4.200	0.0195	
		Polar Samples	EMI Shield Film	Shield	5.000	4.200	0.0195	
3		Polar Samples	PrePreg 1080	Dielectric	3.000	4.200	0.0195	
4		Polar Samples	EMI Shield Film	Shield	1.400			

Copper Thickness = 5.600 | Dielectric Thickness = 24.000 | Solder Mask Thickness = 0.000 | Stack Up Thickness = 29.600 | Stack Up Thickness with Soldermask = 29.600  
Stack Up Cost = 19.00

Notes

Impedance ID	Structure Image	Structure Name	Impedance Signal Layer	Ref. Plane 1 in Layer	Ref. Plane 2 in Layer	Lower Trace Width (W1)	Upper Trace Width (W2)	Trace Separation (S1)	Target Impedance	Tol (+/- %)	Calculated Impedance
1		Offset Stripline 1B2A	2	1	3	6.400	5.400	0.000	50.000	10.000	50.460
2		Edge Coupled Offset Stripline 1B2A	2	1	3	5.000	4.000	8.800	100.000	10.000	100.010


Drill Image	1st Layer	2nd Layer	Column Position	Drill Type
	1	2	2	Laser PTH
	1	4	1	Mechanical PTH
	4	3	2	Laser PTH

StackName: Master	Version:	Revision:	Modification:	Date of Revision:	Editor:	Page 1/1
Date:	Associated Documents:					
Author:						
Department:						
Site:						

Copyright © Polar Instruments Ltd

# Technical report enhancements






Insertion loss report supporting shield materials

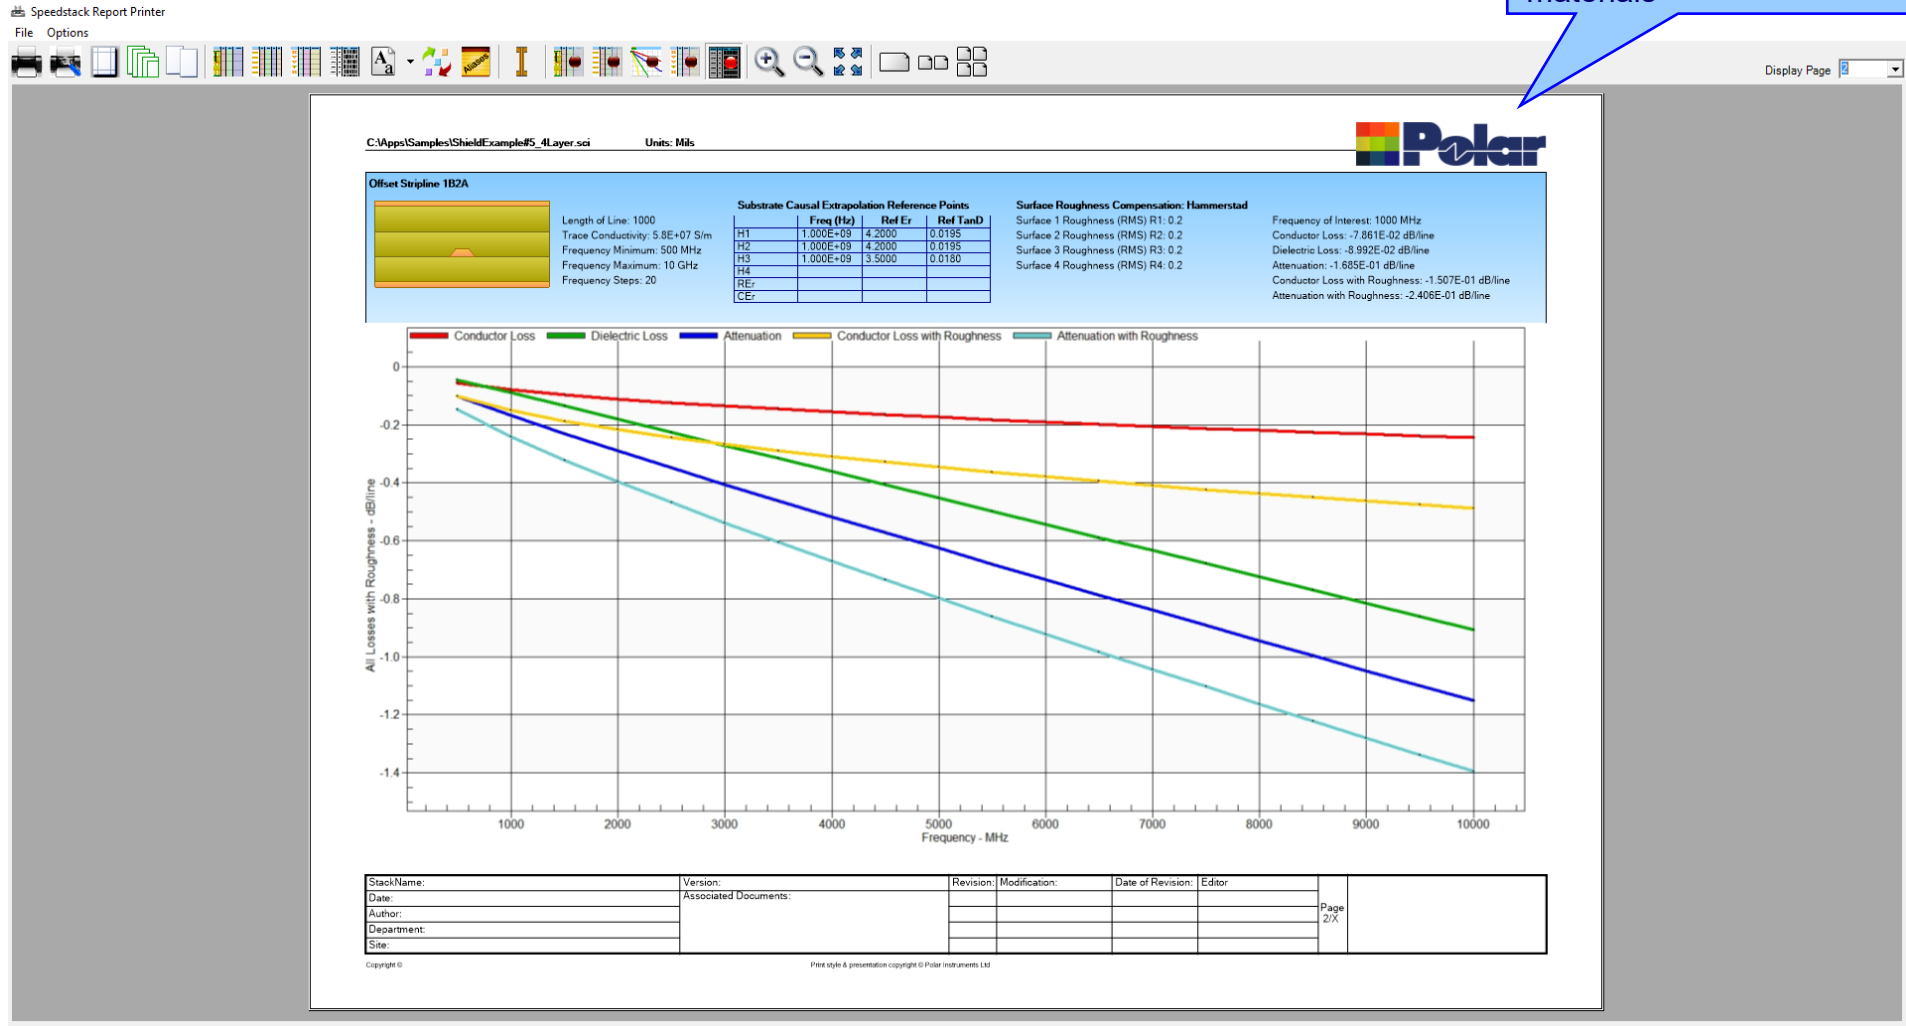


## Import / Export enhancements

The following Import / Export options have been updated to support the new shield material introduced with Speedstack 2021:

- XML STKX v20.00 and SSX v10.00 import / export options
- CSV export option
- Gerber / DXF export option

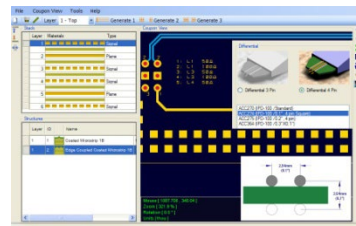
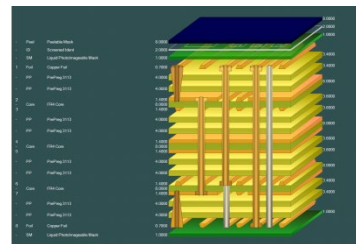
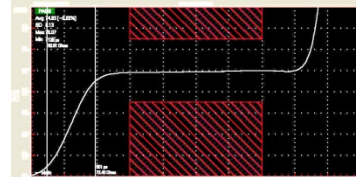
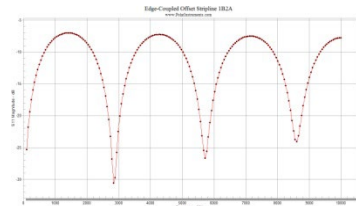
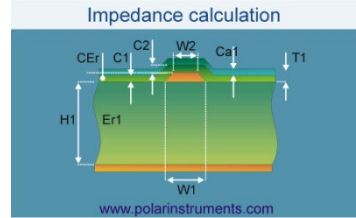


*Thank you for viewing this Speedstack 2021 - 2023 preview. If you have questions we would be delighted to help you. Your local contact information is contained on the following slide*

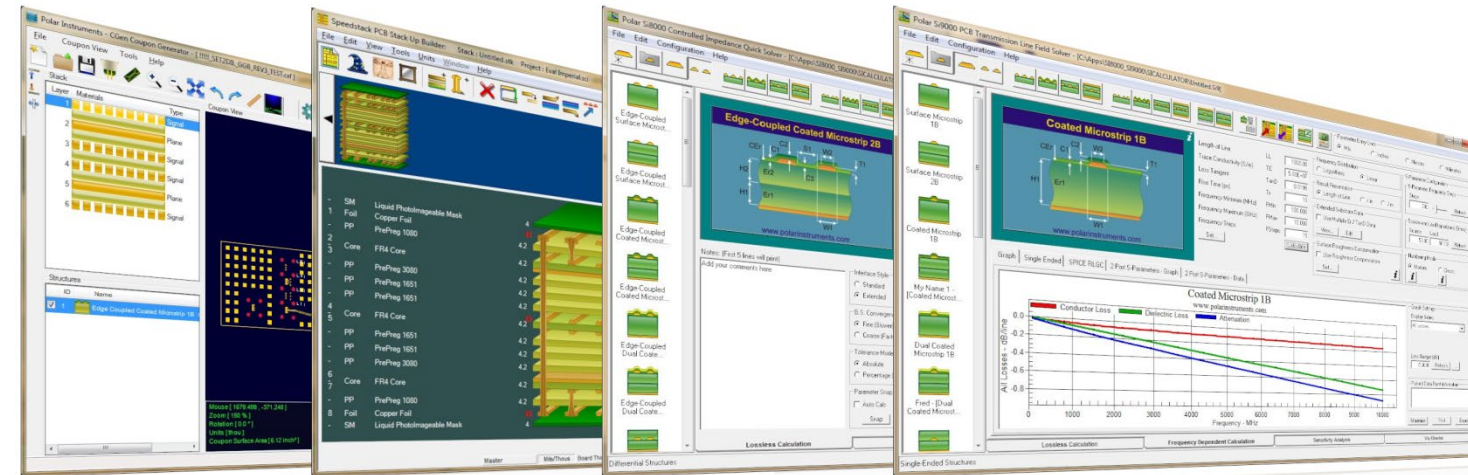

Polar Logo & graphic devices are registered trade marks of Polar Instruments Ltd.  
Copyright Polar Instruments Ltd (c) 2023



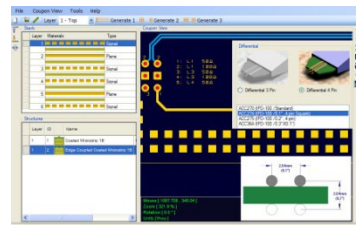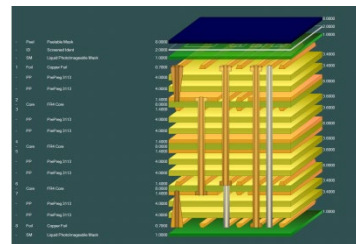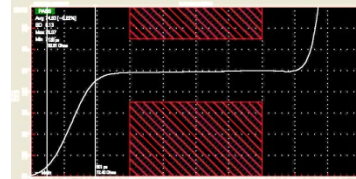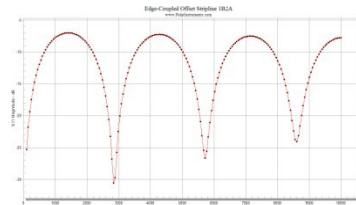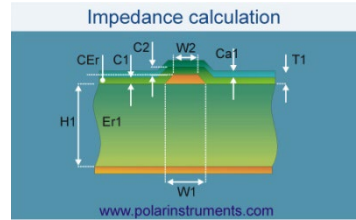

**For more information:  
Contact Polar now:**

**Phone**

**USA / Canada / Mexico  
[Erik Bateham](#)**

**(503) 356 5270**

**Asia / Pacific  
[Terence Chew](#)**

**+65 6873 7470**

**UK / Europe  
[Neil Chamberlain](#)**

**+44 23 9226 9113**

**Germany / Austria / Switzerland  
[Hermann Reischer](#)**

**+43 7666 20041-0**

**[www.polarinstruments.com](http://www.polarinstruments.com)**

Polar Logo & graphic devices are registered trade marks of Polar Instruments Ltd.  
Copyright Polar Instruments Ltd (c) 2023

**[polarinstruments.com](http://polarinstruments.com)**